


IPEVO

Bleiben Sie mit Ihrem Netzwerk in Verbindung, während Sie VZ-X im WLAN-Modus nutzen

Schritt-für-Schritt-Anleitung

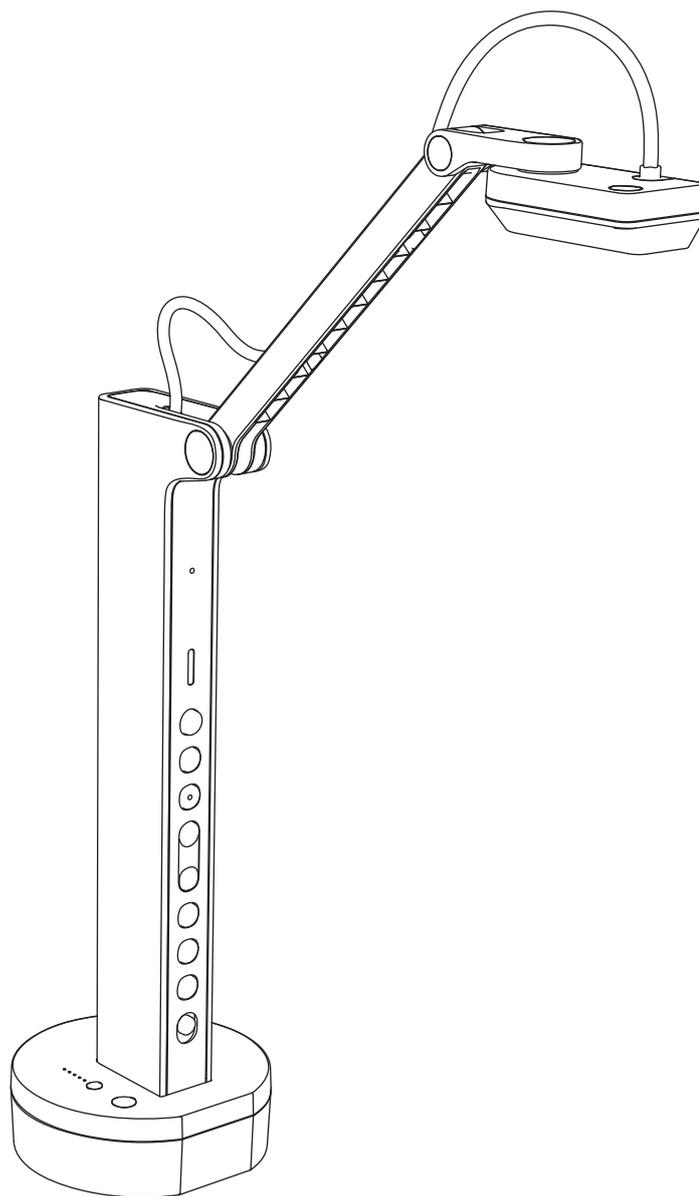


Schritt 1

Bitte schließen Sie die VZ-X [mit Firmware-Version 2023 oder neuer] per WLAN an Ihren Computer an und öffnen Sie ein Browserfenster. Geben Sie **10.10.10.1** in die Adresszeile ein und drücken Sie die Eingabetaste, um auf die erweiterten Einstellungen der VZ-X zuzugreifen.

Schritt 2

Klicken Sie in der Leiste oben rechts auf „**Connect to AP**“ [Mit AP verbinden].

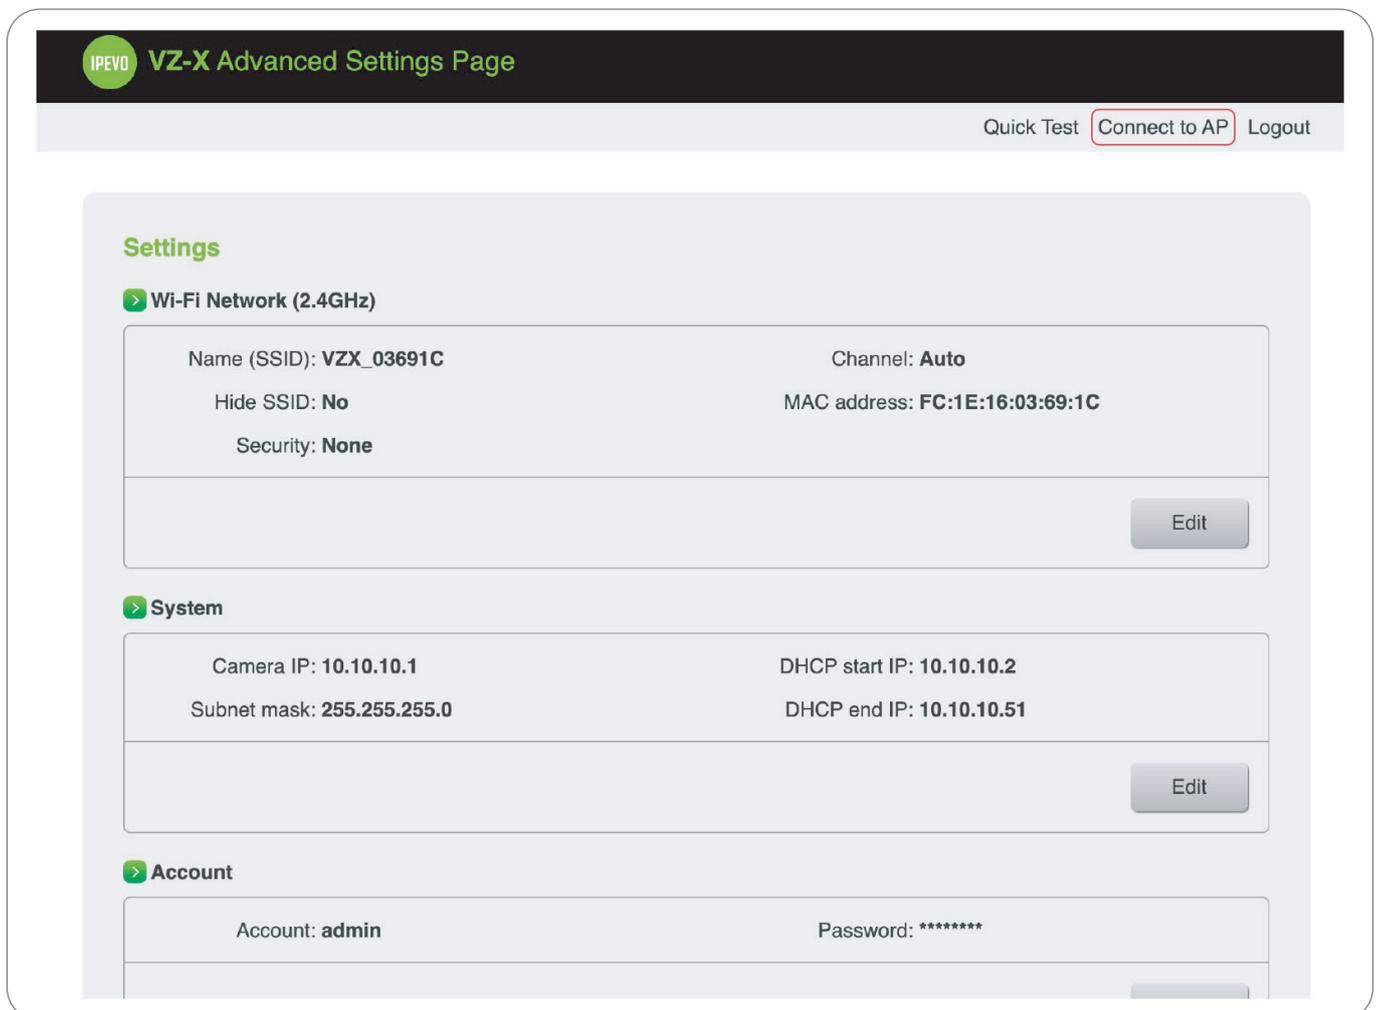

The screenshot displays the 'IPEVO VZ-X Advanced Settings Page'. At the top right, there are links for 'Quick Test', 'Connect to AP' (highlighted with a red box), and 'Logout'. The main content is organized into three sections:

- Settings**
 - Wi-Fi Network (2.4GHz)**
 - Name (SSID): VZX_03691C
 - Channel: Auto
 - Hide SSID: No
 - MAC address: FC:1E:16:03:69:1C
 - Security: None
 - [Edit](#)
- System**
 - Camera IP: 10.10.10.1
 - DHCP start IP: 10.10.10.2
 - Subnet mask: 255.255.255.0
 - DHCP end IP: 10.10.10.51
 - [Edit](#)
- Account**
 - Account: admin
 - Password: *****

Schritt 3

Klicken Sie auf die blaue Aktualisierungsschaltfläche, um die verfügbaren Netzwerke anzuzeigen, und wählen Sie das Netzwerk aus, zu dem Sie eine Verbindung herstellen möchten **[Falls Sie sich zuvor bereits mit einem verfügbaren Netzwerk verbunden haben, werden Sie automatisch verbunden. Bitte beachten Sie den Verbindungsstatus unten links auf der Seite.]**

The screenshot displays the 'VZ-X Advanced Settings Page' for an IPEVO device. The page title is 'VZ-X Advanced Settings Page' and there are links for 'Advanced Settings' and 'Logout'. The main section is 'Wi-Fi WAN Settings'. It features an 'AP List' area with a blue refresh button circled in red. To the right, there are fields for 'SSID:' and 'Password:'. At the bottom, the connection status is shown as 'CONNECTED' with an IP address of '10.10.100.54'. The connected AP details are 'AP SSID: IPEVO_GUEST' and 'Security: WPA2-PSK'.

Status: CONNECTED IP address: 10.10.100.54	AP SSID: IPEVO_GUEST Security: WPA2-PSK
---	--

Schritt 4

Nachdem Sie das Netzwerk ausgewählt haben, geben Sie bitte das Passwort in das Feld „**Password**“ ein und drücken Sie die Eingabetaste.

The screenshot shows the 'Advanced Settings' page for the IPEVO VZ-X device. The main heading is 'Wi-Fi WAN Settings'. On the left, there is an 'AP List' section with a refresh button. The list contains the following entries:

- IPEVO_GUEST
- IPEVO_INTERNAL
- Y144232
- watters
- 350.7F-1.1
- TP-Link_366E
- FGAP
- 99Y020
- VZX_036251
- VZX_035DE6

The 'IPEVO_GUEST' entry is circled in red. To the right of the AP list, there are fields for 'SSID:' and 'Password:'. The 'Password' field is currently empty and has an eye icon for visibility control. Below the settings, the status is shown as 'CONNECTED' and the IP address is '10.10.100.54'. The AP SSID is 'IPEVO_GUEST' and the security is 'WPA2-PSK'.

Schritt 5

Prüfen Sie, ob der Status im unteren linken Bereich „**connected**“ [verbunden] lautet. Sie können die VZ-X jetzt im WLAN-Modus nutzen und mit dem Internet verbunden bleiben.

Falls nicht, wiederholen Sie bitte den Vorgang und achten Sie darauf, das korrekte WLAN-Netzwerk-Passwort einzugeben.

The screenshot displays the 'VZ-X Advanced Settings Page' with a navigation bar at the top containing 'Advanced Settings' and 'Logout'. The main content area is titled 'Wi-Fi WAN Settings'. It features an 'AP List' section with a refresh button and a list of available networks: IPEVO_GUEST, IPEVO_INTERNAL, Y144232, watters, 350.7F-1.1, TP-Link_366E, FGAP, 99Y020, VZX_036251, and VZX_035DE6. To the right, there are input fields for 'SSID:' and 'Password:'. At the bottom, a status bar shows 'Status: **CONNECTED**' and 'IP address: 10.10.100.54'. On the right side of this bar, it displays 'AP SSID: IPEVO_GUEST' and 'Security: WPA2-PSK'.

Schritt 6

Sobald Sie eine Verbindung mit dem ausgewählten drahtlosen Netzwerk hergestellt haben, wird dieses Netzwerk gespeichert und die VZ-X verbindet sich beim nächsten Mal automatisch.

Hinweis

Um die VZ-X im WLAN-Modus mit Zoom zu verwenden, gehen Sie bitte zum Herunterladen-Bereich auf der VZ-X-Website, laden Sie das Add-on „**VirtualCam Controller**“ herunter und installieren Sie es.

Wählen Sie in **VirtualCam Controller** die VZ-X als Quellkamera aus. Wählen Sie anschließend in Zoom die IPEVO Virtual Cam als Ihre Kamera aus.