

(12) **United States Patent**  
**Reynolds**

(10) **Patent No.:** **US 7,868,874 B2**  
(45) **Date of Patent:** **Jan. 11, 2011**

(54) **METHODS AND SYSTEMS FOR DETECTING A POSITION-BASED ATTRIBUTE OF AN OBJECT USING DIGITAL CODES**

6,704,005 B2 3/2004 Kato et al.  
6,771,280 B2 8/2004 Fujisaki et al.  
6,788,288 B2 9/2004 Ano  
7,106,720 B2 \* 9/2006 Ozluturk et al. .... 370/342  
2002/0049070 A1 4/2002 Bick

(75) Inventor: **J. Kurth Reynolds**, Sunnyvale, CA (US)

(73) Assignee: **Synaptics Incorporated**, Santa Clara, CA (US)

(Continued)

FOREIGN PATENT DOCUMENTS

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 976 days.

EP 0749086 A1 12/1996

(Continued)

(21) Appl. No.: **11/274,999**

OTHER PUBLICATIONS

(22) Filed: **Nov. 15, 2005**

International Search Report for International Application No. PCT/US2006/040266, mailed Mar. 30, 2007.

(65) **Prior Publication Data**

US 2007/0109274 A1 May 17, 2007

(Continued)

(51) **Int. Cl.**  
**G06F 3/041** (2006.01)

*Primary Examiner*—Kevin M Nguyen

(52) **U.S. Cl.** ..... **345/173**; 178/19.07

(74) *Attorney, Agent, or Firm*—Ingrassia Fisher & Lorenz, P.C.

(58) **Field of Classification Search** ..... 345/173  
See application file for complete search history.

(57) **ABSTRACT**


(56) **References Cited**

U.S. PATENT DOCUMENTS

4,170,025 A 10/1979 Benkley et al.  
4,459,541 A 7/1984 Fielden et al.  
4,733,222 A 3/1988 Evans  
5,305,017 A 4/1994 Gerpheide  
5,666,113 A 9/1997 Logan  
5,790,106 A \* 8/1998 Hirano et al. .... 345/173  
5,825,352 A \* 10/1998 Bisset et al. .... 345/173  
5,861,875 A 1/1999 Gerpheide  
5,880,411 A \* 3/1999 Gillespie et al. .... 178/18.01  
5,917,906 A 6/1999 Thornton  
6,570,557 B1 5/2003 Westerman et al.  
6,621,487 B2 \* 9/2003 Iwasaki et al. .... 345/173

Methods, systems and devices are described for detecting a position-based attribute of a finger, stylus or other object with a touchpad or other sensor having a touch-sensitive region that includes a plurality of electrodes. Modulation signals for one or more electrodes are produced as a function of any number of distinct digital codes. The modulation signals are applied to an associated at least one of the plurality of electrodes to obtain a resultant signal that is electrically affected by the position of the object. The resultant signal is demodulated using the plurality of distinct digital codes to discriminate electrical effects produced by the object. The position-based attribute of the object is then determined with respect to the plurality of electrodes from the electrical effects.

**68 Claims, 5 Drawing Sheets**

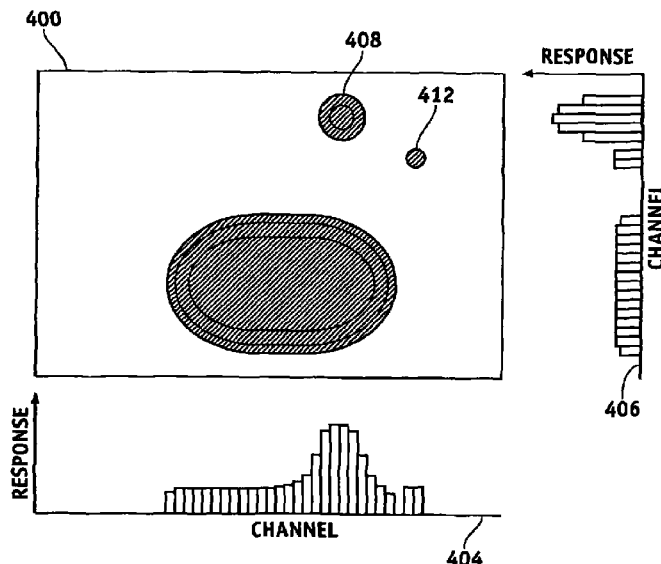

U.S. PATENT DOCUMENTS

2003/0030628	A1	2/2003	Sato et al.	
2003/0035570	A1	2/2003	Benkley, III	
2003/0067449	A1 *	4/2003	Yoshikawa et al.	345/173
2003/0076306	A1 *	4/2003	Zadesky et al.	345/173
2003/0133432	A1 *	7/2003	Moerder	370/342
2004/0081339	A1 *	4/2004	Benkley, III	382/124
2005/0005703	A1	1/2005	Saito et al.	
2005/0024065	A1	2/2005	Umeda et al.	
2005/0052425	A1	3/2005	Zadesky et al.	
2005/0073324	A1 *	4/2005	Umeda et al.	324/662
2005/0122785	A1	6/2005	Umeda et al.	
2005/0150697	A1	7/2005	Altman et al.	

FOREIGN PATENT DOCUMENTS

WO	WO 02/47018	A2	6/2002
WO	WO 2004/107146	A2	12/2004

OTHER PUBLICATIONS

Smith, et al.; "Code-Division Multiplexing of a Sensor Channel: A Software Implementation"; IEEE Journal; Apr. 1999; pp. 725-731; vol. 17, No. 4.

Cichocki, et al.; "A Switched-Capacitor Interface for Capacitive Sensors Based on Relaxation Oscillators"; IEEE Journal; Oct. 1990; pp. 797-799; vol. 39, No. 5.

Huang, et al.; "Electronic Transducers for Industrial Measurement of Low Value Capacitances"; J. Phys. E: Sci. Instrum. 21 1988; pp. 242-250; IOP Publishing Printed in the U.K.

Philipp, Hal; "Charge Transfer Sensing", pp. 1-9; Copyright 1997.



Zimmerman, et al.; "Applying Electric Field Sensing to Human-Computer Interfaces", MIT Media Laboratory; pp. 1-8; to be published in (IEEE SIG) CHI May 1995.


Yamada, et al.; "A Switched-Capacitor Interface for Capacitive Pressure Sensors", IEEE Journal; Feb. 1992; pp. 81-86; vol. 41, No. 1.

Smith, et al.; "Electric Field Sensing for Graphical Interfaces"; IEEE Computer Graphics and Applications; May/Jun. 1998; pp. 54-60.

Vigoda, Benjamin; "A Nonlinear Dynamic System for Spread Spectrum Code Acquisition"; MIT Media Laboratory; pp. 10-90.

\* cited by examiner

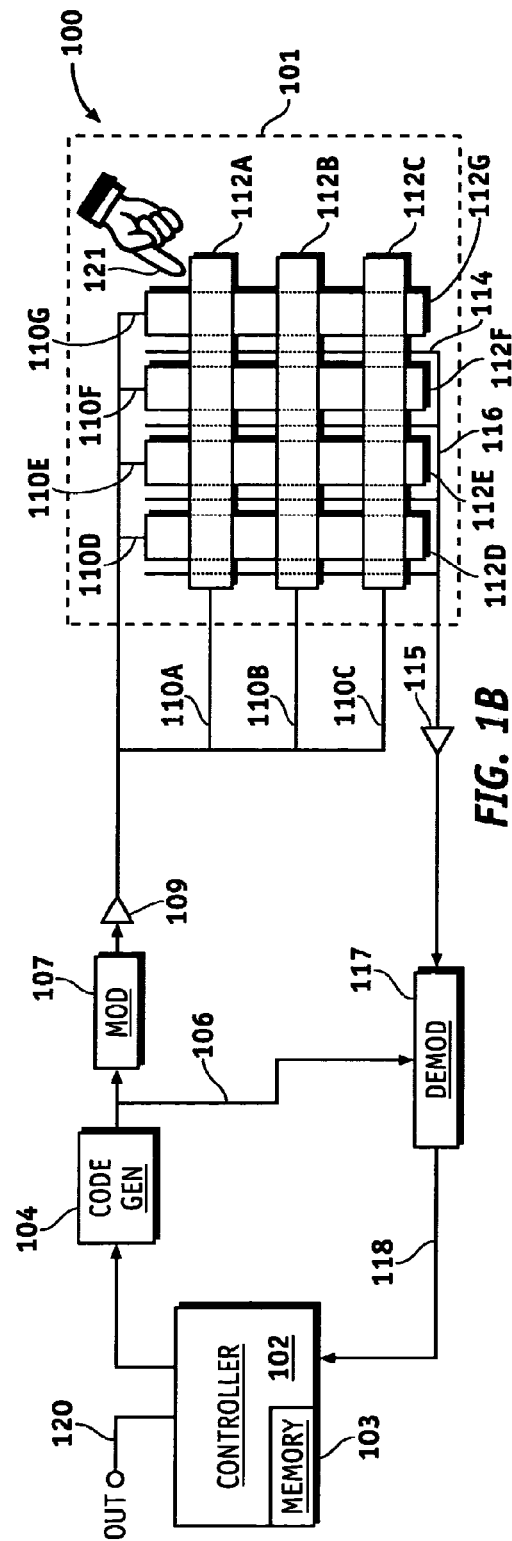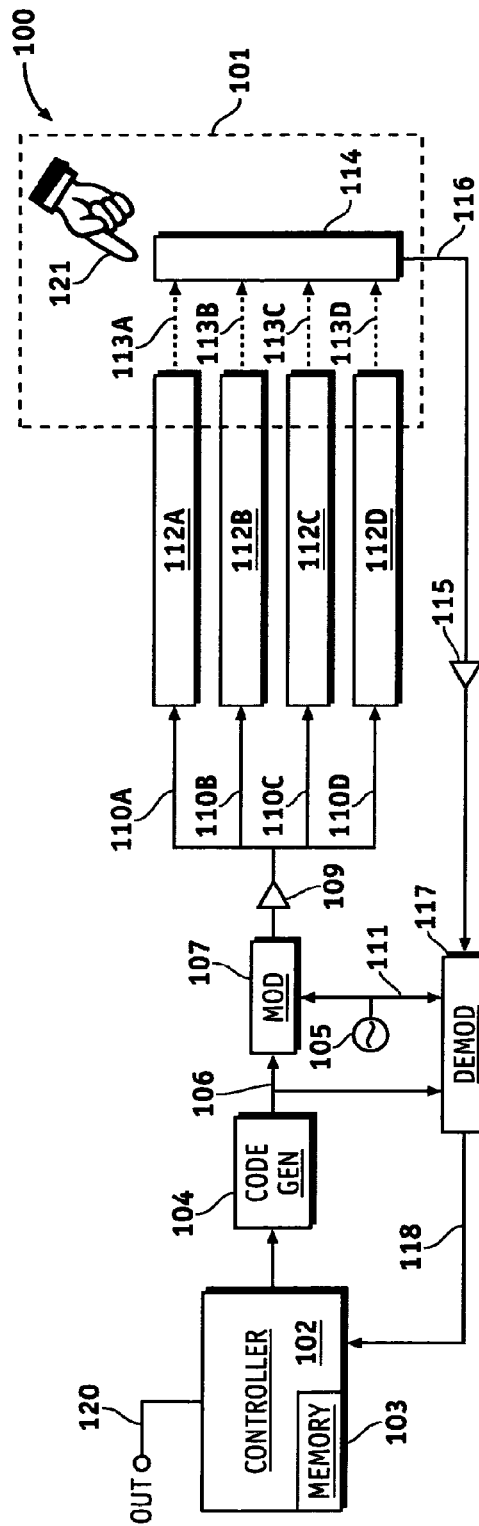

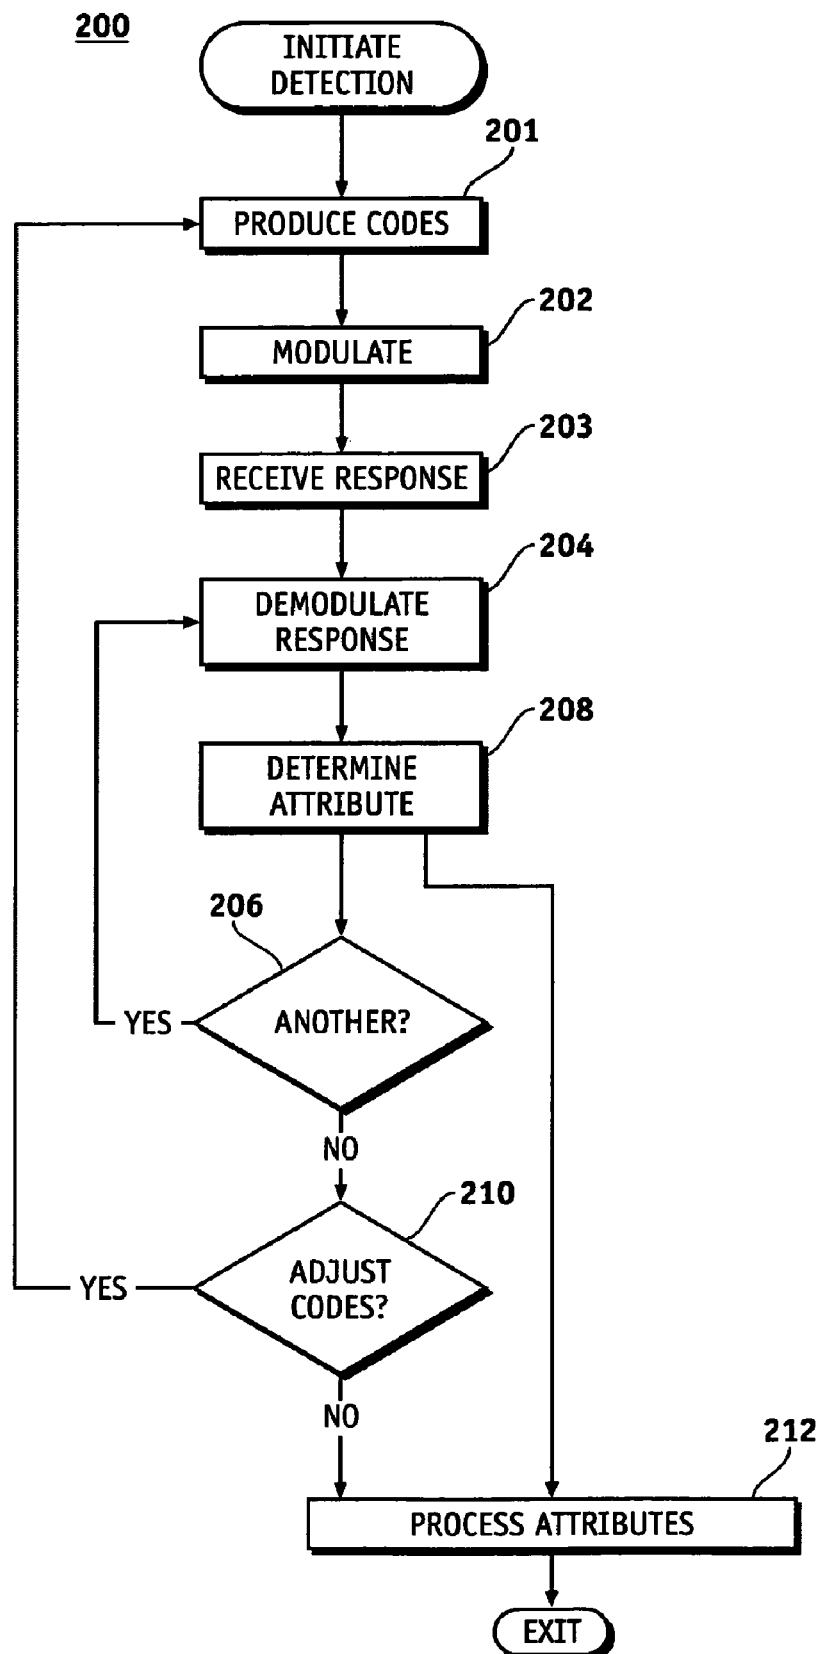**FIG. 2**

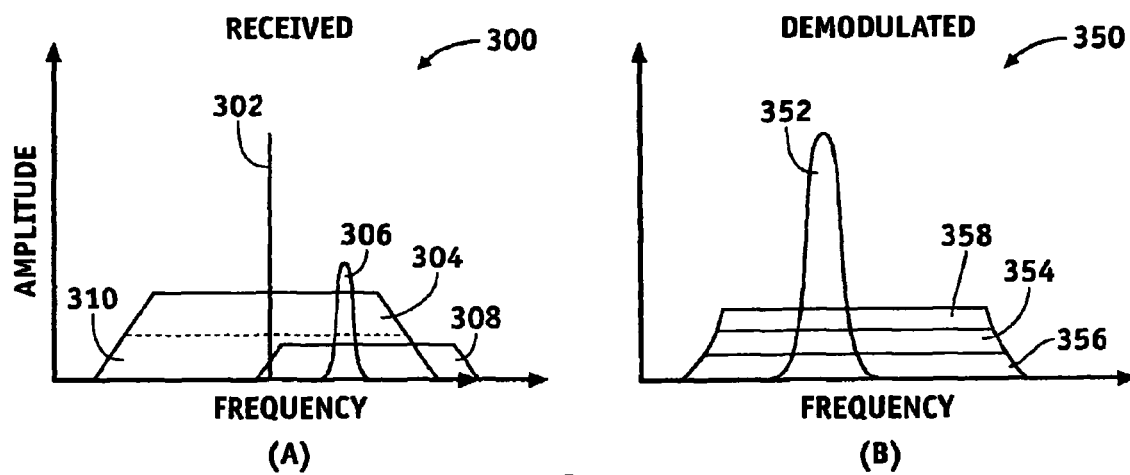


FIG. 3



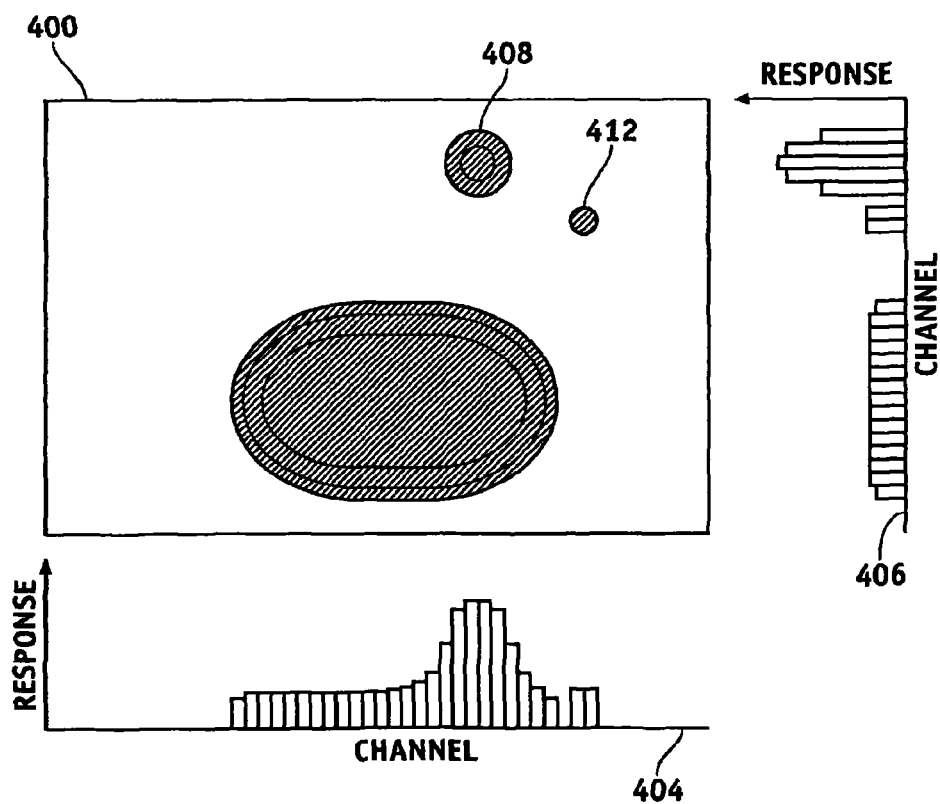



FIG. 4

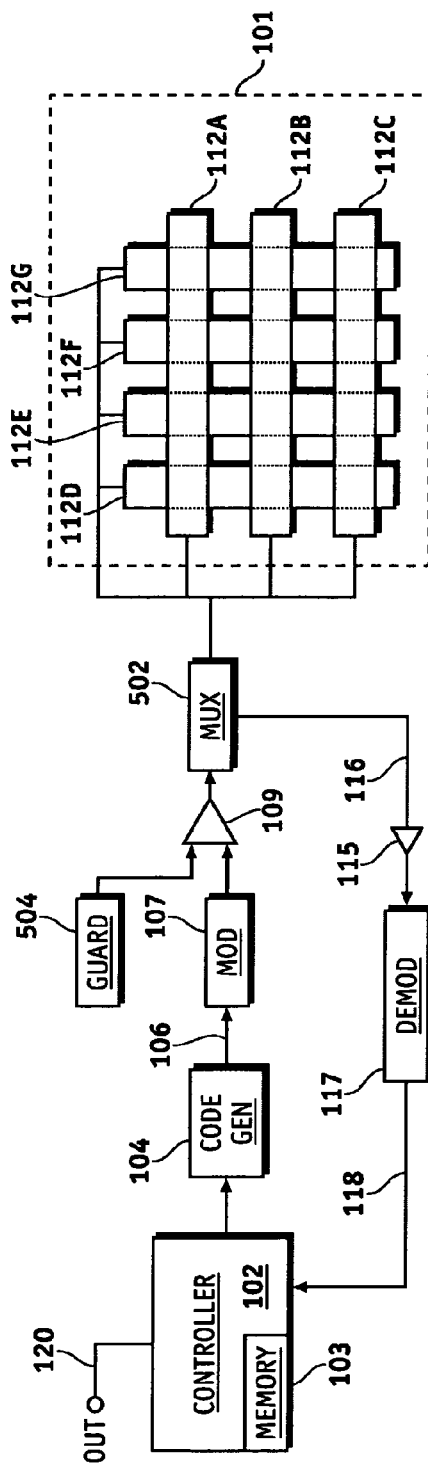


**FIG. 5**

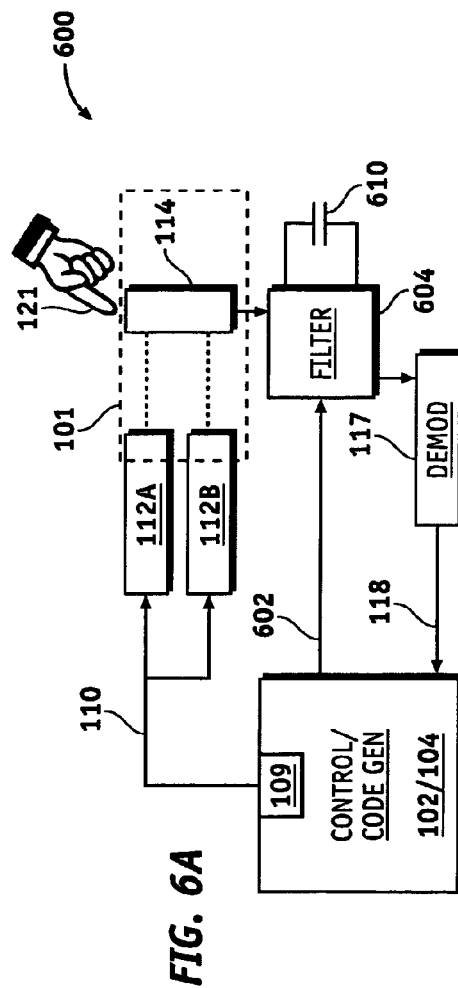


**FIG. 6A**

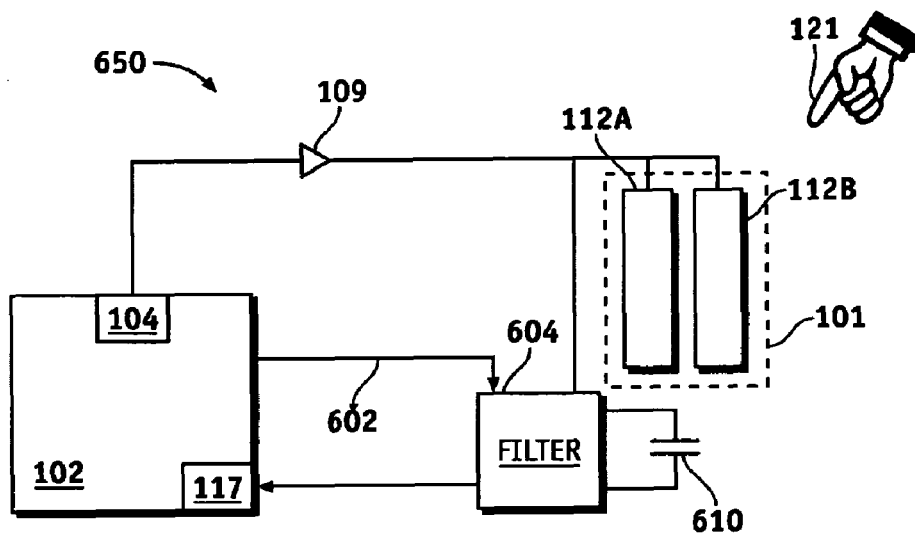

**FIG. 6B**

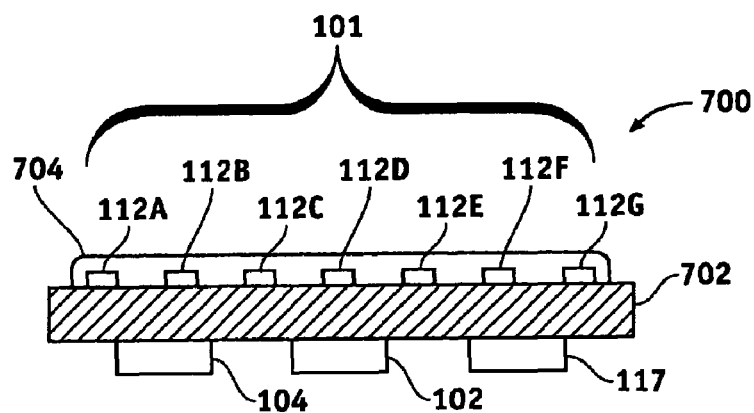

**FIG. 7**

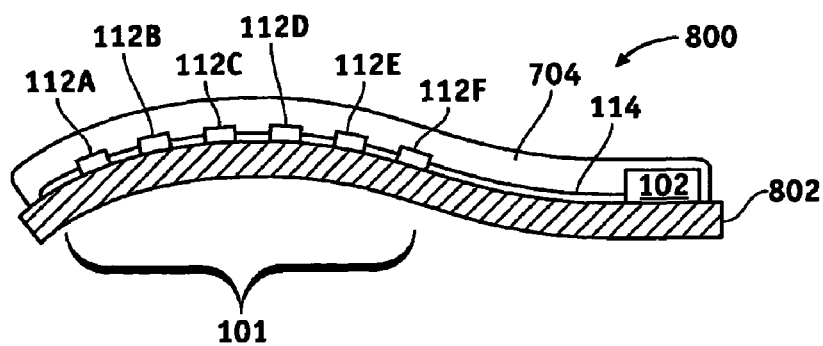

**FIG. 8**

1

# METHODS AND SYSTEMS FOR DETECTING A POSITION-BASED ATTRIBUTE OF AN OBJECT USING DIGITAL CODES

## TECHNICAL FIELD

The present invention generally relates to position or proximity sensors such as touchpads, and more particularly relates to devices, systems and methods capable of detecting a position-based attribute of a finger, stylus or other object using digital codes.

## BACKGROUND

Position sensors are commonly used as input devices for computers, personal digital assistants (PDAs), media players, video game players, consumer electronics, wireless phones, payphones, point-of-sale terminals, automatic teller machines, kiosks and the like. One common type of sensor used in such applications is the touchpad sensor, which can be readily found, for example, as an input device on many notebook-type computers. A user generally operates the sensor by moving a finger, stylus or other stimulus near a sensing region of the sensor. The stimulus creates a capacitive, inductive or other electrical effect upon a carrier signal applied to the sensing region that can be detected and correlated to the position or proximity of the stimulus with respect to the sensing region. This positional information can in turn be used to move a cursor or other indicator on a display screen, scroll through text elements on the screen, or for any other user interface purpose. One example of a touchpad-type position sensor that is based on capacitive sensing technologies is described in U.S. Pat. No. 5,880,411, which issued to Gillespie et al. on Mar. 9, 1999.

While touchpad-type sensors have been in use for several years, engineers continue to seek design alternatives that reduce costs and/or improve sensor performance. In particular, significant attention has been paid in recent years to reducing the effects of noise generated by display screens, power sources, radio frequency interference and/or other sources outside of the sensor. Numerous sampling, filtering, signal processing, shielding, and other noise-reduction techniques have been implemented with varying levels of success.

Accordingly, it is desirable to provide systems and methods for quickly, effectively and efficiently detecting a position-based attribute of an object in the presence of noise. Other desirable features and characteristics will become apparent from the subsequent detailed description and the appended claims, taken in conjunction with the accompanying drawings and the foregoing technical field and background.

## BRIEF SUMMARY

Methods, systems and devices are described for detecting a position-based attribute of a finger, stylus or other object with a touchpad or other sensor. According to various embodiments, the sensor includes a touch-sensitive region made up of any number of electrodes arranged in an appropriate fashion to detect user input. Modulation signals for one or more electrodes are produced as a function of any number of distinct discrete digital codes, which may be substantially orthogonal to each other. The modulation signals are applied to an associated at least one of the plurality of electrodes to obtain a resultant signal that is electrically affected by the position of the object. The resultant signal is demodulated using the plurality of distinct digital codes to discriminate

2

electrical effects produced by the object. The position-based attribute of the object is then determined with respect to the plurality of electrodes from the electrical effects.

## BRIEF DESCRIPTION OF THE DRAWINGS

Various aspects of the present invention will hereinafter be described in conjunction with the following drawing figures, wherein like numerals denote like elements, and

FIGS. 1A-B are block diagrams showing exemplary sensing devices;

FIG. 2 is a flowchart showing an exemplary process for detecting a position-based attribute of an object;

FIG. 3 includes two frequency domain plots for exemplary received and demodulated signals;

FIG. 4 is a depiction of an exemplary scenario for processing electrical images of sensed objects;

FIG. 5 is a block diagram of an exemplary sensing device capable of sensing multiple position-based attributes in two dimensions;

FIG. 6 includes two block diagrams of exemplary sensing devices with a filtering capacitor: one with simultaneous sensing of multiple signal channels on a common receive electrode, and the other with unified modulation and receive electrodes;

FIG. 7 is a block diagram of an exemplary sensing device formed on a single substrate; and

FIG. 8 is a block diagram of an exemplary sensing device formed on a flexible substrate.

## DETAILED DESCRIPTION

The following detailed description is merely exemplary in nature and is not intended to limit the invention or the application and uses of the invention. Furthermore, there is no intention to be bound by any expressed or implied theory presented in the preceding technical field, background, brief summary or the following detailed description.

According to various exemplary embodiments, spread spectrum techniques can be applied within a position sensor such as a touchpad to improve noise immunity and/or to provide performance enhancements. Code division multiplexing (CDM), for example, can be used to create two or more distinct modulation signals that are applied to sensing electrode(s) within the sensor, thereby increasing the effective power of the applied signals. Coded spread spectrum modulation may refer to direct sequence, frequency hopping, time hopping or various hybrids of these or other techniques. Because the modulation frequencies applied to the sensitive region cover a wider spectrum than was previously received, narrow band noise occurring at a particular frequency or moderate wide band noise, uncorrelated with the coded modulation, has a minimal effect upon the narrower overall demodulated signal channels. The effect of noise on multiple signal channels may also be more uniform so that a minimum signal-to-noise ratio (SNR) is maintained for each useful signal channel. This concept can be exploited even further by selecting digital codes to produce frequency-domain signals that avoid known sources of noise. Spread spectrum techniques can therefore apply increased power to the sensing region while reducing the effects of noise, thereby resulting in a significantly improved SNR for the sensor in comparison to conventional time-domain multiplexing techniques of a comparable sample period. Spread spectrum techniques applied within the sensor may enable other beneficial sensor designs and features as well. These concepts are explored more fully below.



As used herein, the term “position sensor” is intended to encompass not only conventional touchpad devices, but also a broad range of equivalent devices that are capable of detecting the position or proximity of one or more fingers, pointers, styli or other objects. Such devices may include, without limitation, touch screens, touch pads, touch tablets, biometric authentication devices (e.g. fingerprint sensors), handwriting or character recognition devices, and the like. Similarly, the terms “position”, “object position” and “position-based attribute” as used herein are intended to broadly encompass various types of absolute or relative positional or proximity information, and also other types of spatial-domain information such as speed, velocity, acceleration, and the like, including measurement of motion in one or more directions. Various position-based attributes may also include time history components, as in the case of gesture recognition and the like. Accordingly, many different types of “position sensors” may be capable of detecting widely varying “position-based attributes” beyond the mere presence or absence of an object in a wide array of alternate but equivalent embodiments determined by their applications.

Turning now to the drawing figures and with initial reference to FIG. 1A, an exemplary sensor 100 suitably includes a sensing region 101, a controller 102, a modulator 107, with associated drive circuitry 109, and a demodulator 117 with associated receiver circuitry 115 as appropriate. A position-based attribute of a finger, stylus or other object 121 is detected by applying various modulation signals 110A-D to electrodes 112A-D that, along with sensing electrode 114, define sensing region 101. The modulation signals 110A-D are capacitively or otherwise electrically coupled to one or more receiving electrodes 114, thereby forming any number of data transmission channels 113A-D. Electrical effects produced by object 121 upon channels 113A-D can be subsequently identified in signals 116 received by the receive electrode, and these received signals can be subsequently processed to isolate the location of object 121 with respect to electrodes 112A-D within sensing region 101. An example of a conventional technique for capacitively sensing and processing object position in a touchpad is set forth in U.S. Pat. No. 5,880,411, referenced above, although any other sensing techniques could be used in a wide array of alternate embodiments.

Although various types of sensors 100 are capable of detecting different electrical effects produced by object 121, the exemplary embodiments of FIGS. 1A-B show configurations for monitoring changes in capacitance across sensing region 101 caused by the presence or absence of object 121. More particularly, as modulation signals 110A-D are applied to electrodes 112A-D, a “virtual capacitor” is formed between each electrode 112A-D transmitting the modulated signal and a receiving electrode 114. If an object is present within the fields created by this capacitor, the capacitance between the transmitting electrode 112 and the receiving electrode 114 is affected. Typically, the effective capacitance between electrodes 112 and 114 is reduced if a grounded (or virtually grounded) object such as a finger is present, and the effective capacitance is increased if an ungrounded conductor (e.g. a stylus) or higher dielectric object is present. In either case, the change in capacitance caused by the presence of object 121 is reflected in the output signal 116 such as voltage, current, or charge measured from receive electrode 114.

By monitoring signals 116 produced by each modulation signal 110A-D, then, the presence of object 121 with respect to each electrode 112A-D (respectively) can be determined. In the exemplary embodiment shown in FIG. 1A, four sensing channels 113A-D are shown arranged in a one-dimensional

sensing array 101. In the exemplary embodiment of FIG. 1B, seven channels 113A-G are implied with several channels 113A-C arranged in a first direction between 112A-C and 114, and the remaining channels 113D-G arranged in a substantially orthogonal direction between 112D-G and 114 to allow for detection of image “silhouettes” in two dimensions, as described more fully below with reference to FIG. 4. In practice, as few as one channel (e.g. a button) or as many as dozens, hundreds or even more sensing channels could be arranged in any single or multi-dimensional pattern in a wide array of alternate embodiments. Properly arranged, the position of an object 121 with respect to sensing region 101 can be determined from the electrical effects produced by object 121 upon the transmission of modulation signals 110A-D applied to the various electrodes. These effects, in turn, are reflected in the received signals 116 that are demodulated and subsequently processed as appropriate to arrive at output signal 120.

Further, sensor 100 may be readily configured or re-configured to create any type or number of sensing zones within region 101 by simply assigning or re-assigning digital codes used to create modulation signals 110. As shown in FIGS. 1A-B, each receiving electrode 114 may receive signals coupled by any number of signal channels 113, thereby resulting in multiple result signals 116 being provided on a single path. Because signals 116 are provided on a common path, sensing channels 113 of any number of electrodes may be created on a permanent or temporary basis by simply applying a common modulation signal 110 (e.g. a modulation signal 110 formed from a common digital code) to each of the transmit electrodes 112 making up the sensing zone. Sensing zones within region 101 may overlap and/or vary with time, and are readily re-configurable through simple application of different digital codes to one or more electrodes 112. More than one electrode may be part of a channel, and more than one channel modulation may be applied to an electrode.

In a traditional sensor, modulation signals 110A-D are typically simple sinusoidal or other periodic alternating current (AC) signals applied sequentially to the various channels using any form of time domain multiplexing (TDM). By applying spread spectrum concepts commonly associated with radio communications to sensor 100, however, numerous benefits can be realized. In particular, digital coding techniques similar to those used in code division multiple access (CDMA) radio communications can be employed to create distinct modulation signals 110A-D that can be simultaneously applied to the various sensing zones of region 101, thereby potentially reducing the switching complexity of sensor 100.

Spread spectrum techniques applied within sensor 100 may provide additional benefits, such as improved resistance to noise. Because each signal channel 113 results from the application of an appropriate digital code, for example, principles of code gain can be readily exploited to improve the performance of sensor 100. The gain of each modulation signal 110 applied to one or more transmit electrodes 112 increases with the length of the code. Through the use of conventional code generation techniques, combinatorial variations of the digital codes with well-known spectral and correlation properties are relatively easy to generate. Further, these combinatorial variations provide a relatively large pool of potential distinct digital codes from which to create modulation signals 110 with desirable time or frequency domain characteristics, as described below. Additional detail about particular code generation and signal processing techniques are described more fully below.

5

Again with reference to FIGS. 1A-B, sensing region **101** is any capacitive, resistive, inductive or other type of sensor that is capable of detecting the position, proximity and/or other position-based attribute of a finger, stylus or other object **121**. Exemplary sensing regions **101** include the various sensors produced by Synaptics Inc. of Santa Clara, Calif., which appropriately detect a one dimensional, two dimensional or multi-dimensional position of an object **121** using capacitive or inductive coupling, although many other sensing regions **101** could be used in a wide array of alternate embodiments. Other types of sensing regions **101** capable of detecting position or proximity include sensors based upon acoustic, optical, or electromagnetic properties (e.g. radio frequency, infrared, ultraviolet or the like), and/or any other effects.

Controller **102** is any processor, microcontroller, neural network, analog computer, programmed circuitry, or other module capable of processing input data **118** to extract output indicia **120** and/or the like. The particular control circuitry **102** used varies widely from embodiment to embodiment, but in exemplary embodiments controller **102** is a model T1004, T1005, T10XX or other microcontroller produced by Synaptics Inc. of Santa Clara, Calif. In many embodiments, controller **102** includes and/or communicates with a digital memory **103** that suitably stores digital instructions in any software or firmware form that are executable by controller **102** to implement the various sensing, control and other functions described herein. Alternatively, the functions of memory **103** may be incorporated into controller **102** such that a physically distinct memory device **103** may not be present in all embodiments. The physical controller may also incorporate more elements including the drive circuitry **109** and receive circuitry **115**, as well as, others described.

Code generation module **104** is any discrete or integrated circuit, device, module, programming logic and/or the like capable of producing digital codes **106** that can be used in generating modulation signals **110A-D**. The number, size and types of digital codes produced vary significantly, but in various embodiments the codes are substantially orthogonal to each other, and are of sufficient length to provide for enough distinct digital codes to be associated with each sensing zone of region **101**. The discrete codes may be binary, ternary, or generically multi-level, and may indicate both driven and un-driven states (tri-state). Various circuits, modules and techniques for generating digital codes suitable for use with CDM include shift register sequences such as Walsh-Hadamard codes, m-sequences, Gold codes, Kasami codes, Barker codes, delay line multiple tap sequences, and/or the like. Alternatively, digital codes may be pre-determined and stored in a lookup table or other data structure within controller **102** and/or memory **103**, and/or may be generated by controller **102** using any suitable algorithm. In such embodiments, code generation module **104** may not be present as a separate physical element from controller **102**, but rather should be considered to be a logical module representing the code generation and/or retrieval function carried out by controller **102** or other digital processing devices as appropriate.

The term "substantially orthogonal" in the context of the distinct digital codes is intended to convey that the distinct codes need not be perfectly orthogonal from each other in the mathematical sense, so long as the distinct codes are able to produce meaningful independent results. Strict orthogonality may thus be traded off for various other properties such as correlation, spectra, or compressibility. Similarly, the term "sensing zone" is intended to convey that a single code could be applied to multiple electrodes **112** to create a single zone of sensitivity that encompasses a larger portion of sensing region **101** than any of the individual electrodes **112**. Also,

6

more than one code could be applied to an electrode creating overlapping or spatially filtered "sensing zones". For example phase delayed or "shifted" versions of the same code sequence can be distinct and substantially orthogonal such that they are readily distinguishable. In various cases, interpolation between phase shifts may even be possible.

Modulator **107** is any circuit, logic or other module capable of producing modulation signals **110A-D** using the distinct digital codes produced by module **104**. Typically, modulator **107** modulates a carrier signal **111** with the digital codes **106** using any type of amplitude modulation (AM), frequency modulation (FM), phase modulation (PM) or another suitable technique to create modulation signals **10A-D**. Accordingly, modulator **107** may be implemented using any conventional digital and/or analog circuitry, or may be partially or entirely implemented with software logic executing within controller **102** or the like. Carrier signal **111** may be produced by any oscillator or other signal generator **105** as appropriate. In one embodiment suitable for use in a capacitively-sensing touchpad, signal **111** can be produced at frequencies that range from about 10 kHz-100 MHz, although these signals may be produced at any frequency or range in a wide array of equivalent embodiments. Additional detail about an exemplary modulation function is described below with respect to FIG. 3. In still other embodiments, carrier signal **111** is eliminated and spectral components of the applied modulation signals **110A-D** are determined from the clock rate, repeat lengths and/or other aspects of the digital codes. The carrier signal **111** may therefore be eliminated and/or conceptualized as a direct current (DC) signal in various alternate embodiments.

Modulation signals **110A-D** are applied to electrodes **112A-D** of sensing region **101** in any manner. In various embodiments, modulator **107** suitably applies the signals to the appropriate electrodes **112A-D** via any drive circuitry **109**, which includes any sort of scaling amplifier, multiplexer, switch to any current or voltage source, charge transfer device, controlled impedance, and/or the like. Although FIG. 1 shows a single driver circuit **109** interconnecting modulator **107** and sensing region **101** in a serial fashion, in practice drive circuitry **109** will typically include multiple amplifiers, multiple drivers and/or other signal paths providing parallel connections between modulator **107** and the various electrodes **112** within sensing region **101** to permit multiple sensing channels **113** to be driven by modulated electrodes **112** simultaneously with the same or different signals.

As noted above, modulation signals **110A-D** are provided to electrodes **112A-D** in sensing region **101**, and resultant signals **116** from receiving electrode **114** are provided to a suitable demodulator **117**. A scaling amplifier, multiplexer, filter, discriminator, comparator, and/or other receiving circuitry **115** may be provided as well to shape received signals **116**. Demodulator **117** is any circuit or other module capable of demodulating the output **116** of sensing region **101** to identify any electrical effects produced by object **121**. Demodulator **117** may also include and/or communicate with a demodulation filter, such as any suitable digital or analog low-pass or band-pass filter, as well as any conventional analog-to-digital converter (ADC). In various embodiments, demodulator **117** receives carrier signal **111** and/or the phase shifted versions of the distinct digital codes **106** to allow demodulation of both signals. Alternatively, demodulator **117** provides analog demodulation of carrier signal **111** and provides the resultant signals to controller **102** and/or receiving circuitry **115** for subsequent processing. Similarly, the demodulation function represented by module **117** in FIG. 1 may be logically provided in hardware, software, firmware

and/or the like within controller **102** and/or another component, thereby removing the need for a separately-identifiable demodulation circuit **117**.

During the operation of sensor **100**, any number of distinct digital codes are produced by code generation module **104** and modulated with a carrier frequency to create a set of modulation signals **112A-D** applied to any number of electrodes **112A-D** within sensing region **101**. The position of object **121** with respect to sensing region **101** electrically affects one or more output signals **116** provided from sensing region **101**. By demodulating the resultant signals **116**, the electrical effects can be identified and subsequently processed by controller **102** or the like to determine a position-based attribute relating to object **121**. By modulating the electrodes with an appropriate digital code, the narrower sensing frequency for the sensor is effectively spread across multiple frequencies, thereby improving noise rejection. Moreover, the use of code division multiplexing allows each of the modulation signals **110A-D** to be applied simultaneously, thereby reducing or eliminating the need for separate time domain switching and control in many embodiments. The electrical effects identified from sensing region **101** using spread spectrum techniques may be further processed by controller **102** and/or another processing device as appropriate.

With reference now to FIG. 2, an exemplary process **200** for detecting a position-based attribute of an object with respect to a sensing region **101** suitably includes the broad steps of producing a set of distinct digital codes for modulation signals **110A-D** (step **201**), demodulating each of the response signals **116** that result from the application of modulation signals **110A-D** (steps **204**, **206**), and determining one or more position-based attributes of object **121** from the electrical effects identified within the response signals **116** (step **208**). In various further embodiments, the particular digital codes generated in step **202** may be modified (step **210**) to reduce the effects of noise, reducing interference on other devices caused by this device, or for any other purpose. Additional processing may also be performed (step **212**), such as single or multi-object processing, rejection of undesired image data, and/or the like.

Although flowchart shown in FIG. 2 is intended to show the various logical steps included in an exemplary process **200** rather than a literal software implementation, some or all of the steps in process **200** may be stored in memory **103** and executed by controller **102** alone and/or in conjunction with other components of sensor **100** (e.g. code generation module **104**, modulator **107**, demodulator **117** and/or the like). The various steps may be alternately stored within any digital storage medium, including any digital memory, transportable media (e.g. compact disk, floppy disk, portable memory and/or the like), magnetic or optical media, and/or the like. The various steps of process **200** may be applied in any temporal order, or may be otherwise altered in any manner across a wide array of alternate embodiments. Further, the various steps shown in FIG. 2 could be combined or otherwise differently organized in any manner.

As noted above, the distinct digital codes **106** used to create modulation signals **110A-D** may be produced in any manner (step **201**), such as by any type of hardware or software logic represented by code generation module **104** in FIG. 1. Any number of feedback shift registers, for example, can be configured in a maximum length sequence (MLS) or the like to generate a pseudo-random digital code of any desired length that could be readily applied in a variety of phases and/or sums as distinct code sequences to the various modulation signals **110A-D**. The resulting sequence of binary codes **106**

emanating from parallel shift registers is generally spectrally flat, with the exception of a minimal DC term. In an alternate embodiment, a MLS or other routine for generating digital codes **106** may be simulated in software executing within controller **102**, or elsewhere as appropriate. In still other embodiments, codes **106** are generated prior to use and stored in a lookup table or other data structure in memory **103**, or the like. In various alternate but equivalent embodiments, controller **102** may directly generate or retrieve codes **106** and/or may produce them by directing the operation of a separate code generation module **104** or the like. As noted above, the particular codes may be generated in any manner. A digital bit sequence may be simply shifted in phase, for example, to create multiple distinct codes. Alternatively, distinct codes can be computed from other codes using a variety of methods including summation, exclusive-or, and multiplication, and/or other techniques of generating high dimensionality random and pseudo-random sequences. Code generation techniques based upon exclusive-or or multiplication operations may provide an additional benefit of generating linear combinations that may be useful in some embodiments.

The various codes **106** are then used to modulate or otherwise create the particular modulation signals **110A-D** that are applied to the various sensing electrodes **112A-D** in sensing region **101** (step **202**). As described above, the applied signals are electrically affected by the presence of object **121**, with the resultant electrical effects being determinable from received signal **116** (step **203**).

Demodulating received signal channels **113** (in step **204**) suitably involves extracting information about the position of object **121** from the modulated signals. Such extraction typically involves reversing the modulation process described above. Accordingly, demodulator **117** typically receives carrier signal **111** (or another signal that is synchronous with signal **111**) for performing analog demodulation and/or signal discrimination (e.g. distinguishing between noise and desired signal) in addition to the particular digital code **106** that previously modulated the carrier signal used to create the particular resultant signal **116**. Because the sensor both transmits and receives, it is rarely necessary to recover the carrier or code sequence.

Demodulation may be carried out for any number of received signal channels **113**, as appropriate (step **206**). In the exemplary sensor **100** shown in FIG. 1A, signal **116** resulting from the transmission of each signal channel from the modulated electrodes **112A-D** are received on a common path emanating from receiving electrode **114**. Even if the various sensing channels **113A-D** are all active at the same time (e.g. modulation signals **110A-D** are simultaneously provided to each modulated electrode **112A-D**), however, the resulting signals **116** produced by each channel **113A-D** can be demodulated using conventional CDM demodulation techniques. Particular components (or channels) of resultant signal **116** produced in response to any modulation signal **110A-D** can therefore be readily extracted. This concept can be exploited in myriad ways, as described below, to create a number of additional features and performance enhancements within sensor **100**. A common modulation signal **110A-D**, for example, could be applied to multiple electrodes **112A-D** to increase the size of any particular sensing zone within region **101**. These zones can be readily adjusted during operation to create various operating modes or the like. To make the entire sensing region **101** act as a single button, for example, each electrode **112A-D** could be provided with the same modulation signal **110** without otherwise adjusting the performance of the sensor. Because all of the signals resulting from receive electrode **116** are provided on a common path in

FIG. 1, simply demodulating the entire received signal using the common modulation code will identify the presence of object 121 anywhere within sensing region 101 in this case. Similar concepts can be applied to create any number of independent or overlapping sensing zones across sensing region 101 through simple manipulation of digital code sequences 106. Furthermore, spatial frequency filtering can be done simply through proper modulation and demodulation, for example to accomplish palm rejection or to reject other inappropriate inputs.

The demodulated signals 118 are appropriately received at controller 102 so that the position-based attribute of object 121 can be determined (step 208). These signals may be filtered digitally or as analog, using linear and non-linear filters. Various techniques for identifying the position of object 121 with respect to the various electrodes 112A-D include detection of peak electrical effect, computation of a centroid based upon the electrical effects, comparison of differences in electrical effects observed between electrodes 112A-D, comparison of changes in electrical effects over time, interpolation between signal channels from the electrodes, and/or according to many other techniques. In the case of peak detection, the position of object 121 is associated with one or more electrodes 112A-D by identifying which modulation signal 110A-D produced the greatest relative change of capacitive effect in resultant signal 116. Sensing channels 113A-D experiencing such peak (maximum, minimum, or otherwise distinct) electrical effects could also be identified by comparing currently-observed, scaled electrical effects to baseline values (e.g. average values for the particular channel that are empirically determined, averaged over time, stored from a previous observation, and/or the like). Still other embodiments could identify the channel 113A-D that produced peak electrical effects by comparing current electrical effects for each channel 113A-D with current values observed in neighboring sensing channels. Alternatively, a weighted average of the electrical effects observed from some or all of the modulated electrodes 112A-D can be computed, with this weighted average, or centroid, correlating to the position of object 121. Many techniques for correlating electrical effects observed across sensing region 101 to a position of object 121 are known or may be subsequently developed, and any of these techniques may be used in various embodiments, according to the application.

By varying the digital codes 106 used to create modulation signals 110A-D over time, various additional features can be implemented. To implement a simple dual-differential digital-to-analog conversion for received signal channels 113, for example, the digital code 106 applied to one or more electrodes 112 is logically inverted (e.g. 1's complement) on a periodic, aperiodic, or other time basis to obtain complementary sensed signals 116. The complementary codes 106 can be used to drive two separate ADC inputs (e.g. ADCs present in driver 115 and/or demodulator 117) in opposite directions, thereby canceling out many types of variability or residual distortion in signal 116. Steps 210 and 212 describe optional noise reconfiguration and image processing features, respectively, that may be enabled in various embodiments as additional benefits available from the use of spread spectrum techniques. These features are described in increasing detail below (in conjunction with FIGS. 3 and 4, respectively), and may not be present within all embodiments. Because the digital codes 106 are inherently simple to modify, store and subsequently process, any number of signal enhancement, noise reduction and/or other performance improvements to sensor 100 are enabled. Further, a relatively large number of digital codes are available due to the combinatorial power of

digital sequences. Coding gain and orthogonality conventionally rely upon linearity and superposition of the particular codes used. Although non-linearity and dispersion limit the theoretical effectiveness of digital codes, these limitations can be more than offset by the increases in relative signal power (and thus SNR) that can result from simultaneously modulating more than one electrode 112. Further, since it is possible that self-induced inter-channel noise dominates over other noise sources in many embodiments, a relatively stable dynamic range can be provided.

Referring now to FIGS. 3A-B, spread spectrum techniques allow for improved noise avoidance as compared to conventional single-frequency sampling techniques. As noted above, a sensing zone may correspond to a single electrode 112, or a common modulation signal 110 may be provided to multiple electrodes 112 to create a larger sensing zone that effectively behaves as a single "electrode" for purposes of subsequent demodulation and computation. The modulated waveform 110, being the function of a distinct digital code 106, uniquely identifies the sensing zone to which it is applied, thereby allowing ready application of CDM and other conventional spread-spectrum techniques. FIG. 3 shows an exemplary spectral plot 300 that emphasizes the frequency domain differences between the spectrum 302 of carrier signal 111 and the spectrum 304 of modulated signal 110. In contrast to a single-frequency carrier signal 302, the multi-frequency spectrum 304 of modulated signal received on 114 is much wider. Because the spectrum 304 of the modulated signal distributes available power across a much wider sensitivity band, the effects of narrowband noise signals 306 at or near any particular frequency of interest are significantly reduced. That is, if a spurious noise signal 306 happened to occur near a single-frequency (or narrowband) carrier signal 302, any electrical effects present within the sensing channel 113 could be overwhelmed by the noise. Moreover, adverse effects of wider-band noise 308 or interference from other modulated electrode channels 310 can be mitigated through spread-spectrum techniques, as shown in spectral plot 350 of received signal 116. Plot 350 shows that the demodulated signal 352 (corresponding to coupling of a channel 113 and/or the presence of object 121 near the demodulated sensing region) is contained within a relatively narrow frequency band, whereas signals 354 received from other channels are spread across a wider band. Both wideband noise 308 and narrow band noise 306 are similarly spread across wider frequency bands 356 and 358 in the demodulated signal. By increasing the bandwidth of the applied modulated signal 110, then, the signal-to-noise ratio in the demodulated signal 116 is improved dramatically. The demodulation in turn spreads the noise outside of the signal band, which then becomes quite narrow, thereby allowing the desired signal portion 352 to be readily extracted by a narrow band filter or the like.

This concept can be further exploited by selecting digital codes 106 that avoid known sources of noise. That is, digital codes 106 of any bit length may be applied to carrier signal 111 to create spectral "gaps" at frequencies known to be susceptible to spurious noise. By applying conventional Fourier analysis (e.g. using a simple fast Fourier transform (FFT) or the like), digital codes can be selected to create modulation signals 110 having many desired spectral characteristics. Codes applied to any modulated electrode 112 can be modified during operation (e.g. step 210 in FIG. 2) and/or may be pre-selected to avoid expected or observed noise in resultant signals 116. Alternatively, the particular codes 106 applied to one or more electrodes 112 may be randomly, pseudo-randomly, deterministically or otherwise modified during sensor

## 11

operation, thereby statistically filtering any noise present within resultant signals **116** or demodulated signals **118** over time. Similarly, particular spatial frequencies or spatial positions can be emphasized (e.g. with code gain) or filtered out by the codes applied to different modulation electrodes. Code shifting during operation may provide other benefits (e.g. discrimination of or resilience to moisture) in addition to reducing the effects of noise or spurious effects of non-input objects (palm etc). In various equivalent embodiments, the frequency, phase, amplitude and/or waveform of carrier signal **111** may be adjusted in place of or in addition to modifying digital codes **106**.

With reference now to FIG. 4, spread spectrum techniques that simultaneously apply multiple coded modulation signals **110A-D** to various electrodes **112A-D** are able to identify multiple presences **408**, **410**, **412** of objects **121** located within sensing region **101**. Multiple objects may correspond to the presence of multiple fingers on a touchpad, for example, a palm resting on sensor **100** during use, simultaneous presence of a finger and a stylus, and/or any other combination of inputs. Electrical effects resulting from the various presences **408**, **410** can be conceptually projected along one or more axes **404**, **406** to identify the relative positions of the objects along that axis, as shown in FIG. 4. That is, peak value(s) of electrical effects can be correlated to relative positions of objects **121** with respect to sensing region **101**. In the example of FIG. 4, a finger **408** may be identified by increases in electrical effects projected along an "X" axis **404** and a "Y" axis **406**. By correlating the relative X and Y positions of peak electrical effects, the location of presence **408** can be correlated in two dimensions (or any other number of dimensions). Similarly, the example of FIG. 4A shows a larger area indicating a second presence **410** that results projections of electrical effects in axes **404** and **406**. These multiple projections of electrical effect can be additionally correlated to identify images (e.g. "outlines") of objects **121** present within region **101**. Taking this concept further, one or more images **408**, **410** may be subsequently processed as appropriate. Presence of multiple fingers within region **101** may be used to perform scrolling, mode selection or other tasks, for example. Similarly, if an image can be identified as resulting from a user's palm (or another undesired portion of the user's body), that image **410** can be subsequently rejected in future processing, such as reporting of positional information or other output signals.

In the exemplary embodiment shown in FIG. 4, the two axes **404**, **406** generally correspond to portions of modulated electrodes **112** or their associated channels shown arranged in two approximately orthogonal directions as in FIG. 1B. Alternate embodiments, however, may include any number of electrodes **112** arranged in any overlapping, non-overlapping, matrix or other arrangement. An example of a sensor **500** with overlapping electrodes **112A-G** arranged in two dimensions is shown in FIG. 5. In such embodiments, electrical effects on received channels can effectively be independently measured at each crossing of the electrodes in two directions (e.g. X and Y directions corresponding to axes of **404**, **406** in contour plot **400**), with the results correlated in controller **102** to provide a two-dimensional representation or image of object **121** rather than two one-dimensional "silhouettes" like **404** and **406**. In such cases, electrodes arranged in the first direction (e.g. electrodes **112A-C**) may be modulated at separate times from electrodes arranged in the second direction (e.g. electrodes **112D-G**), with one or more independent received signals **116** at any one time from either set of electrodes (e.g. electrodes **112D&F**) being provided to demodulator **117** via a multiplexer **502**. FIG. 5 shows the various electrodes **112A-G**

## 12

coupled to both modulator **107** and demodulator **117** via a multiplexer **502**. The multiplexer may also connect one or more of the electrodes to receiving circuitry **115** before demodulation. In practice, each electrode may be connected in any manner to allow signals to be applied on one subset of electrodes **112** and received on another subset.

In various embodiments, two or more electrodes which serve to receive channels (e.g. analogous to channel **113** described above) may be provided with independent resultant signals **116**. Further, inactive or unused electrodes (e.g. **112E&G**) may be coupled to an electrical reference (e.g. ground) or driven with a modulated signal to improve spatial resolution on the active receive channels. This reference is commonly referenced as a shield or guard signal, which may be applied via multiplexing logic **502** or the like.

Digital coding and other spread-spectrum techniques may be equivalently applied in sensors that operate in any number of different manners. FIG. 6A, for example, shows an exemplary sensor **600** that includes any number of modulated electrodes **112A-B** arranged in any single or multi-dimensional fashion that are coupled to a capacitive filter (e.g. an integrating capacitor **610**) which linearly transforms the charge transferred by the modulated electrodes. A microcontroller **102/104** or the like suitably generates distinct digital codes **106** that modulate **112A-B** coupled to **114** electrode as described above. In this case, however, the digital codes **106** are not necessarily intended to encode the voltage provided to each electrode **112A-B**, but rather to control the timing of charge that is transferred to **114**. By controlling the timing of each electrode's charging and discharging and then observing the amount of charge collected at integrating capacitor **610** from **114**, the amount of charge provided by each electrode **112A-B** can be determined from the demodulated signal **118**. The charging of each electrode **112A-B** can be controlled by selecting digital codes **106** such that voltage is applied to each electrode only when charge should be transferred to the receiving electrode **114**, and otherwise allowing it to float. By selectively providing charge from individual and/or groups of electrodes **112A-B** to capacitor **610**, the amount of coupling from each electrode **112A-B** (which is affected by the proximity of an object **121**) can be determined.

FIG. 6B presents an alternate embodiment of an exemplary sensor that has unified sensing and driving on each electrode **112** that is filtered or demodulated by one or more capacitors **610**. The codes **106** modulate drive circuitry **109**, which may be implemented as a current source connected to the electrodes **112**. The response of the electrode to the drive circuitry is affected by the coupling of an object **121** near the electrode, and the resultant signals (e.g. the voltage resulting from the coupling) are filtered and/or demodulated by the circuit **604** and capacitor **610**. The filtered signals may be further demodulated to determine position attributes of the object. Further, more than one electrode could be simultaneously driven with substantially orthogonal codes and after demodulation a stable coupling of one electrode **112A** to another electrode **112B** would substantially cancel out. These and many other position sensing methods benefit from digital coding and spread spectrum techniques.

With reference now to FIG. 7, various sensors **700** formed in accordance with the coding techniques described herein may be formed on a single circuit board or other substrate **702**. In such embodiments, electrodes **112A-G** forming sensing region **101** may be disposed on one side of the substrate, with the processing components (e.g. controller **102** and the like) formed on the opposite side. Because various sensors (e.g. sensors **100** and **500** shown in FIGS. 1 and 5) do not require physical movement of sensing and receiving elec-

13

trodes 112, 114 with respect to each other, electrodes 112, 114 in such sensors may be rigidly fixed on substrate 702 in any manner. Substrate 702 can be made of a flexible material to allow for folding or bending. Further, a protective surface 704 may be deposited or otherwise placed over the electrodes to provide consistent dielectric isolation and to protect against moisture, dust and other environmental effects. Surface 704 may also provide tactile feedback to the user as appropriate. FIG. 8 shows an exemplary sensor 800 is formed on a flexible substrate 802 as appropriate. FIG. 8 also shows that the various processing components may be found on the same side of substrate 802 as the modulated and sensing electrodes, and that the substrate 802 may also provide tactile feedback for region 101. It should be appreciated that the various concepts, structures, components and techniques described herein may be inter-combined and/or modified as appropriate to create a wide variety of alternate embodiments.

Accordingly, there are provided numerous systems, devices and processes for detecting a position-based attribute of a finger, stylus or other object in a position sensing device such as a touchpad. While at least one exemplary embodiment has been presented in the foregoing detailed description, it should be appreciated that a vast number of variations exist. The various steps of the techniques described herein, for example, may be practiced in any temporal order, and are not limited to the order presented and/or claimed herein. It should also be appreciated that the exemplary embodiments described herein are only examples, and are not intended to limit the scope, applicability, or configuration of the invention in any way. Various changes can therefore be made in the function and arrangement of elements without departing from the scope of the invention as set forth in the appended claims and the legal equivalents thereof.

What is claimed is:

1. A method of detecting a position of a pointer with respect to a touch-sensitive region comprising a plurality of electrodes, the method comprising the steps of:

simultaneously applying a first one of a plurality of distinct modulation signals to an associated first one of the plurality of electrodes and a second one of the plurality of distinct modulation signals to an associated second one of the plurality of electrodes to obtain a resultant signal that is electrically affected by the position of the pointer, wherein each of the plurality of distinct modulation signals is based on a different one of a plurality of distinct digital codes;

demodulating the resultant signal using the plurality of distinct digital codes to thereby discriminate electrical effects produced by the pointer; and

determining the position of the pointer with respect to the plurality of electrodes from the electrical effects.

2. The method of claim 1 wherein the determining step comprises determining the position of the pointer with respect to the plurality of electrodes based upon a peak value of the electrical effects.

3. The method of claim 1 wherein the determining step comprises determining the position of the pointer with respect to the plurality of electrodes based upon a computed centroid of the electrical effects.

4. The method of claim 1 wherein the determining step comprises determining a difference between the electrical effects associated with at least two electrodes.

5. The method of claim 1 wherein the determining step comprises comparing the electrical effects to previously-determined baseline effects.

14

6. The method of claim 1 wherein determining comprises determining the position of the pointer as the pointer moves with respect to the touch sensitive region.

7. The method of claim 1 further comprising providing an output based upon the position that describes a motion of the pointer with respect to the plurality of electrodes.

8. The method of claim 1 further comprising providing an output based upon the position that describes a change in the position from a previous position.

9. The method of claim 1 further comprising providing an output based upon the position that describes a velocity of the pointer.

10. The method of claim 1 further comprising providing an output based upon the position that describes an acceleration of the pointer.

11. The method of claim 1 wherein each of the plurality of distinct digital codes is substantially orthogonal to the remainder of the plurality of distinct digital codes.

12. The method of claim 1 wherein each of the plurality of distinct digital codes is a substantial portion of a code derived from a maximum length shift register sequence.

13. The method of claim 1 wherein at least some of the plurality of distinct digital codes are selected to avoid the effects of noise in the resultant signal.

14. The method of claim 1 further comprising the step of generating each of the plurality of distinct digital codes.

15. The method of claim 14 wherein the generating step comprises producing the plurality of distinct digital codes using at least one shift register.

16. The method of claim 1 wherein the applying step comprises applying a same one of the plurality of distinct modulation signals substantially simultaneously to at least two of the plurality of electrodes.

17. The method of claim 1 wherein the demodulating step comprises receiving signals from at least two of the plurality of electrodes on a common signal path as the resultant signal.

18. The method of claim 1 wherein the electrical effects result from an electrical coupling between the pointer and at least some of the associated electrodes.

19. The method of claim 18 wherein the electrical coupling is a capacitive coupling.

20. The method of claim 18 wherein the resultant signal is received as electrical effects obtained from an integrating capacitor coupled to at least two of the plurality of electrodes.

21. The method of claim 1 further comprising the step of: applying a plurality of complementary modulation signals to at least one of the associated first one of the plurality of electrodes and the associated second one of the plurality of electrodes to obtain a plurality of complementary sensed signals, the plurality of complementary modulation signals based on complements of the plurality of distinct digital codes.

22. The method of claim 21 further comprising the steps of: demodulating each of the plurality of complementary sensed signals using the distinct digital code associated with the at least one of the associated first one of the plurality of electrodes and the associated second one of the plurality of electrodes to thereby identify complementary electrical effects from the plurality of electrodes; and

comparing the electrical effects with the complementary electrical effects to thereby perform dual differential conversion.

23. The method of claim 1 further comprising the step of adjusting at least one of the distinct digital codes in response to the resultant signals.

## 15

24. The method of claim 1 further comprising the step of adjusting at least one of the distinct modulation signals in response to the resultant signal.

25. The method of claim 1 further comprising the step of processing the resultant signal to determine a second position of a second pointer in proximity to the touch-sensitive region that is independent of the pointer.

26. The method of claim 25 wherein the pointer and the second pointer are separate parts of a human hand.

27. The method of claim 25 further comprising the step of rejecting information relating to the second pointer.

28. The method of claim 1 wherein the determining step comprises defining an image of the pointer.

29. The method of claim 28 wherein the image represents a two-dimensional topography of the pointer projected upon the touch-sensitive region.

30. The method of claim 28 further comprising the step of processing the resultant signal to determine a position of a second pointer in proximity to the touch-sensitive region, the second pointer being independent of the pointer and having a second image.

31. The method of claim 30 further comprising the step of tracking movements of the pointer and of the second pointer with respect to the touch-sensitive region.

32. The method of claim 30 further comprising the step of determining whether the second pointer represents an undesired input, and if so, rejecting the second pointer.

33. The method of claim 1 wherein the distinct digital codes have more than two states.

34. The method of claim 1 wherein the applying step comprises amplitude modulating a carrier signal with each of the plurality of distinct digital codes.

35. The method of claim 1 wherein the plurality of electrodes comprises a first plurality of electrodes having a first orientation and a second plurality of electrodes having a second orientation.

36. The method of claim 35 wherein each of the plurality of distinct modulation signals is applied to the first plurality of electrodes and received via the second plurality of electrodes.

37. The method of claim 35 further comprising the step of applying a guard signal to at least one inactive electrode of the second plurality of electrodes.

38. The method of claim 1 wherein the applying step comprises applying a same one of the plurality of distinct modulation signals to at least two of the plurality of electrodes.

39. A touch-sensitive device for detecting a position of a pointer, the device comprising:

a touch-sensitive region comprising a plurality of electrodes having electrical characteristics configured to be affected by the proximity of the pointer;

circuitry associated with each of the electrodes;

a demodulator coupled to the touch-sensitive region; and

a processor coupled to the circuitry and to the demodulator, wherein the processor is configured to initiate production of a plurality of distinct modulation signals, wherein each of the plurality of distinct modulation signals is produced as a function of a different one of a plurality of distinct digital codes, to initiate simultaneous application of a first one of the plurality of distinct modulation signals to a first one of the plurality of electrodes and a second one of the plurality of distinct modulation signals to a second one of the plurality of electrodes via the circuitry, to demodulate a sensed signal received from the touch-sensitive region using the distinct digital codes to discriminate electrical effects produced by the pointer

## 16

upon at least one electrode, and to determine the position of the pointer with respect to the plurality of electrodes using the electrical effects.

40. The device of claim 39 wherein the circuitry comprises an analog signal generator configured to generate a carrier signal and a modulator configured to amplitude modulate the carrier signal with each of the plurality of distinct digital codes to thereby produce the distinct modulation signals.

41. The device of claim 39 wherein the touch sensitive device further comprises a substantially rigid surface configured to provide tactile feedback to the user.

42. The device of claim 41 wherein the substantially rigid surface is further configured to provide the tactile feedback without substantially affecting the electrical effects.

43. The device of claim 41 wherein the substantially rigid surface is further configured to provide the tactile feedback without substantially affecting the positions of the plurality of electrodes relative to each other.

44. The device of claim 39 wherein presence of the pointer to the touch-sensitive region reduces electrical coupling between at least two of the plurality of electrodes.

45. The device of claim 44 wherein the at least two of the plurality of electrodes comprise a first electrode having a first orientation and a second electrode having a second orientation substantially perpendicular to the first orientation.

46. The device of claim 39 further comprising a capacitor electrically coupled to at least some of the plurality of electrodes and to the demodulator.

47. The device of claim 46 wherein the capacitor is configured to integrate charge received from the at least some of the plurality of electrodes.

48. The device of claim 39 wherein the pointer is a finger.

49. The device of claim 39 wherein the pointer is a stylus.

50. The device of claim 39 wherein the electrodes are formed on a flexible substrate.

51. A device for detecting a position of a pointer with respect to a touch-sensitive region comprising a plurality of electrodes, the device comprising:

means for simultaneously applying a first one of a plurality of distinct modulation signals to an associated first one of the plurality of electrodes and a second one of the plurality of distinct modulation signals to an associated second one of the plurality of electrodes to obtain a resultant signal that is electrically affected by the position of the pointer, wherein each of the plurality of distinct modulation signals is based on a different one of a plurality of distinct digital codes;

means for demodulating the resultant signal using the plurality of distinct digital codes to thereby discriminate electrical effects produced by the pointer; and

means for determining the position of the pointer with respect to the plurality of electrodes from the electrical effects.

52. The device of claim 51 wherein the means for determining is configured to determine the position of the pointer as the pointer moves with respect to the touch sensitive region.

53. The device of claim 51 wherein the resultant signal is directly affected by the position of the pointer.

54. The device of claim 51 wherein the pointer is a finger.

55. The device of claim 51 wherein the pointer is a stylus.

56. The device of claim 51 wherein the electrodes are substantially rigidly fixed in position with respect to each other.

57. The device of claim 51 wherein the determining means is further configured to determine a second position of an

## 17

independent second pointer that is in proximity to the touch-sensitive region, wherein the second position is determined from the electrical effects.

58. The method of claim 1 wherein the resultant signal is directly affected by the position of the pointer.

59. The method of claim 1 wherein the pointer is a finger.

60. The method of claim 1 wherein the pointer is a stylus.

61. The method of claim 1 wherein the electrodes are substantially rigidly fixed in position with respect to each other.

62. The device of claim 39 wherein the electrodes are substantially rigidly fixed in position with respect to each other.

63. The device of claim 39 wherein the resultant signal is directly affected by the position of the pointer.

64. The device of claim 39 wherein the processor is further configured to determine a second position of an independent

## 18

second pointer that is in proximity to the touch-sensitive region, wherein the second position is determined from the electrical effects.

65. The device of claim 39 wherein the processor is further configured to determine the position of the pointer as the pointer moves with respect to the touch sensitive region.

66. The method of claim 1 wherein each of the plurality of distinct digital codes is strictly orthogonal to the other digital codes.

67. The device of claim 39 wherein each of the plurality of distinct digital codes is strictly orthogonal to the other digital codes.

68. The device of claim 51 wherein each of the plurality of distinct digital codes is strictly orthogonal to the other digital codes.

\* \* \* \* \*