

Case Number: SEP 2014-01329

BUNCOMBE COUNTY HEALTH CENTER  
ENVIRONMENTAL HEALTH SERVICES (828-250-5016)

PIN: 9710 64 4329

OPERATIONS PERMIT

Property Owner: Katelyn Hurd Property Location: 20 Golden Tree Ln. Application Date: 11/21/14


Directions: Hwy 63 (R) Dix Creek Chapel (L) Golden Tree on (L)

Subdivision:                      Phase/section:                      Lot#:                      Installer: Brandon King

Water Supply:  Private Well  Spring  Shared Well  Community Min. Required Separation Distance: 50' Installed?  Yes  No

Conditions: 1) Pump septic tank every 3 to 5 years. 2) Divert all gutters and other surface water, away from septic system and repair areas. (3) No cutting or filling over septic system and repair areas.

\* NOT TO SCALE \*

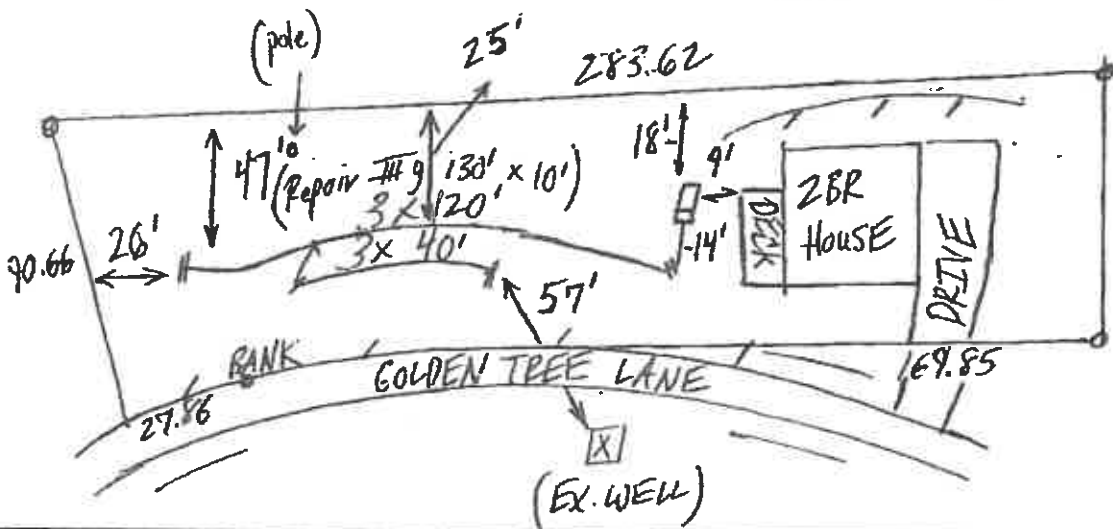

Operations Permit For:  New System  Repair  Revision Drawings, plans, conditions, etc. attached?  Yes  No

System Approved For:  House  Mobile Home (  single  double ) Bedrooms: 2 Basement:  Yes  No Basement Plumbing:  Yes  No

Multiple Unit Dwelling: No. of Units                      Number of Bedrooms per unit                       Business No. Employees:                      No. Shifts:                     

Operation Maintenance & Monitoring Description (if applicable):                     

Industrial Waste: Yes  No

Approved Installation Specifications: Total Design Flow: 240 LTAR: 45 System Classification: Type I, II, III g, IV, V, VI (GPD)

Pump System Required:  Yes  No Pump Specification Pump Make:                      Model:                      Serial No.                     

Trenches: Length: 160 ft No. of Trenches 2 Width: 36 Spacing: 9 ft Depth: 18 in (lower sidewall) Stone Depth:                      in

Distribution:  Equal Gravity  Pressure Manifold  Serial  Dams/Step Downs Tank Size: Septic: 1000 Pump Tank:                     

System Type Installed:  Prefabricated Panel Block  Conventional  Large Diameter Pipe  Chamber  Expanded Poly (gallons) Aggregate  Other (gallons)

Comments: \* See Conditions above TANK - K-1000 STB-141 (8/30/14)

Inspected by: William J. PETH Date: 3/18/15 Issued To: [Signature] Date: 3/15/10

The system has been installed in accordance with state sewage rules. Approval does not guarantee the system will function satisfactory for any given time. Oppenit.doc.rev 02/27/13