

Andersons
GOLF PRODUCTS®

Contec DG®



Dispersing Granule Technology

24-0-10

- Patented dispersing granule formula
- Greatly reduces nutrient loss from mower pickup
- Contains MUTECH-L™ for extended feeding
- Easy spreading granules

Visit our website: AndersonsGolfProducts.com

SGN 150

Net Wt 50 Lbs (22.68 kg)



Contec DG®
Dispersing Granule Technology

24-0-10 AGC2424WDG5.1

SIDE PANEL READS THIS WAY




SIDE PANEL READS THIS WAY

24-0-10 AGC2424WDG5.1

DIGITAL
MICRO DOT

Contec DG®
Dispersing Granule Technology

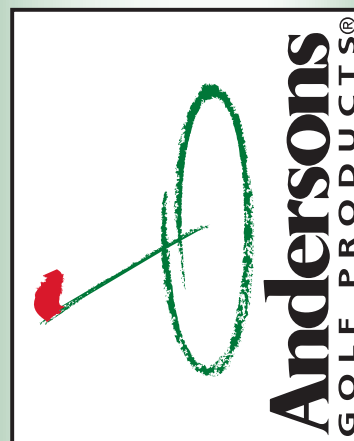



ContecDG[®] 24-0-10

Dispersing Granule Technology

GUARANTEED ANALYSIS

Total Nitrogen (N) 24.00%
2.40% Ammoniacal Nitrogen
1.86% Urea Nitrogen
6.81% Other Water Soluble Nitrogen*
12.93% Water Insoluble Nitrogen
Soluble Potash (K₂O) 10.00%
Sulfur (S) 6.15%
6.15% Combined Sulfur (S)
Plant nutrients derived from methylene ureas, ureaform, ammonium sulfate and potassium sulfate.
*6.81% slowly available nitrogen from methylene ureas and ureaform.

F292

U.S. Patent #6,884,756
Information regarding the contents and levels of metals in this product is available on the internet at <http://www.regulatory-info-ap.com>

DIRECTIONS FOR USE

Apply only as directed during the growing season.

Use Andersons Golf Products ContecDG[®] Dispersing Granule Technology 24-0-10 for fairways and other turf areas where a high nitrogen and potassium fertilization is desired.

Watering in this product will disperse each granule into thousands of particles. This will facilitate the movement of the nutrients into the soil. This particle dispersion will also eliminate ball, shoe and mower pickup - minimizing nutrient loss.

Recent research has shown that environmental buffers prevent pollutants from entering our natural water bodies. To help protect these natural resources, avoid applying product to sidewalks, driveways, roadways, and other impervious surfaces. Sweep any misplaced granules back onto the area you are treating immediately after application, since storm drains often empty directly to nearby waterways.

Application Rates:

LIGHT: 4.16 lbs./1,000 sq. ft.
LOW: 6.25 lbs./1,000 sq. ft.
MEDIUM: 7.29 lbs./1,000 sq. ft.
HIGH: 8.33 lbs./1,000 sq. ft.

FLORIDA APPLICATIONS:

We recommend that you follow the Florida Green Industries BMP's at: <http://www.flaes.org/pdf/BMPBookfinal.pdf>

We recommend that you follow the Florida Golf Course BMP's at: <http://www.flaes.org/pdf/glfbmp07.pdf>.

Spreading with PTO driven spreaders:

Excessive agitation of Contec DG can result in damage to the Contec DG particles. Keep the PTO operating at 540 rpm or less. DO NOT use agitation bars or stir bars, as this can result in the premature breakdown of Contec DG granules.

Spreader Settings:

Spreader settings are recommendations only and should be considered as a beginning point for user calibration. Results obtained by an applicator in the field may be different due to spreader production variations, spreader calibration differences, operating variables, and environmental factors (temperature, humidity, etc.). It is recommended that applicators check the pattern and delivery rate for their particular spreader periodically under their operating conditions using the actual product to be applied.

For all applications:

Immediately after application, apply a minimum of 0.2 inches of water to disperse the granules.

Cold weather and/or cold water (lower than 45° F/7° C) can result in slower particle dispersion.

Storage and Use:

Store in a clean, dry place.
Reseal opened bag by folding top down and securing.
Use only clean, dry spreaders.
Do not leave unused product in spreaders.

IMPORTANT: READ BEFORE USE:

Read the entire Directions for Use and the Warranty Disclaimer and Limitation of Liability before using this product. If terms are not acceptable, return the unopened product container at once. By using this product, user or Buyer accepts the following Warranty Disclaimer and Limitation of Liability:

WARRANTY DISCLAIMER and LIMITATION of LIABILITY:

Manufacturer warrants that this product conforms to the chemical description on the label and is reasonably fit for the purposes stated on the label when used in strict accordance with the directions. Manufacturer makes NO OTHER EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. To the extent consistent with applicable law, it is Manufacturer's intent to LIMIT ANY LIABILITY FOR SPECIAL, CONSEQUENTIAL OR INCIDENTAL ECONOMIC DAMAGES to refund of purchase price or replacement of product, at Buyer's choice. To the extent consistent with applicable law, manufacturer DISCLAIMS ANY LIABILITY FOR COMPENSATORY OR OTHER DAMAGES ARISING OUT OF ANY USE CONTRARY TO LABEL DIRECTIONS. Use contrary to label directions is not permitted.

LEGAL RIGHTS:

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS; YOU MAY HAVE OTHER RIGHTS THAT VARY FROM STATE/JURISDICTION TO STATE/JURISDICTION.

Product of USA

Manufactured by:
The Andersons Lawn Fertilizer Division, Inc.
P. O. Box 119
Maumee, Ohio 43537

AGC2424WDG5.1
AGC2424WDG5.2B

©2011
Andersons Golf Products and Contec DG are registered trademarks of The Andersons, Inc.; MUTECH-L is a trademark of The Andersons, Inc.

Visit our website: AndersonsGolfProducts.com



Suggested Spreader Settings

These suggested spreader settings are not intended to replace calibration. Please calibrate your spreader before applying product.

50 lbs. feeds 12,000 sq. ft. (0.28 acre) with 1.00 lb. N/1,000 sq. ft. at the LIGHT RATE (4.16 lbs./1,000 sq. ft.)
50 lbs. feeds 8,000 sq. ft. (0.18 acre) with 1.50 lb. N/1,000 sq. ft. at the LOW RATE (6.25 lbs./1,000 sq. ft.)
50 lbs. feeds 6,800 sq. ft. (0.16 acre) with 1.75 lb. N/1,000 sq. ft. at the MEDIUM RATE (7.29 lbs./1,000 sq. ft.)
50 lbs. feeds 6,000 sq. ft. (0.14 acre) with 2.00 lb. N/1,000 sq. ft. at the HIGH RATE (8.33 lbs./1,000 sq. ft.)

SPREADER	GROUND SPEED	WIDTH OF COVERAGE	SPREADER SETTINGS			
			LIGHT RATE 4.16 lbs./1,000 sq. ft.	LOW RATE 6.25 lbs./1,000 sq. ft.	MEDIUM RATE 7.29 lbs./1,000 sq. ft.	HIGH RATE 8.33 lbs./1,000 sq. ft.
Andersons Rotaries AccuPro 2000/SR-2000 (Cone 6)	3 mph	11 feet	M 1/4	O 1/4	P 1/4	Q 1/4
Scotts Rotaries R-8, R-8A (Cone 5)	3 mph	11 feet	K 3/4	N 1/4	O 1/4	P 1/4
Lely Models (Pattern III-C) WTR, WFR, HR, 1250 (PTO at 450 rpm)	4.5 mph	34 feet	5 3/4	6 3/4	7 1/4	7 3/4
Vicon (03 Series-Standard Spout)	4.5 mph	20 feet	20	26	28	31