



US 20020159431A1

(19) **United States**(12) **Patent Application Publication****Moulsley et al.**(10) **Pub. No.: US 2002/0159431 A1**(43) **Pub. Date: Oct. 31, 2002**(54) **RADIO COMMUNICATION SYSTEM****Publication Classification**(75) Inventors: **Timothy J. Moulsley**, Caterham (GB);  
**Matthew P.J. Baker**, Canterbury (GB);  
**Bernard Hunt**, Redhill (GB)(51) **Int. Cl.<sup>7</sup>** ..... **H04J 3/24**(52) **U.S. Cl.** ..... **370/347; 370/342; 370/389**(57) **ABSTRACT**


A radio communication system comprises a communication channel for the transmission of data packets (302) from a primary station having a plurality of antennas to a secondary station having at least one antenna. The channel comprises a plurality of paths, and the primary station transmits a plurality of packets substantially simultaneously. Each of the plurality of packets is transmitted via a different subset of the plurality of paths, for example by arranging for each packet to be transmitted via a different antenna or antenna beam.


The secondary station receives the plurality of data packets, determines whether each packet is received correctly and signals this determination (typically as an acknowledgement (304) or a negative acknowledgement (306)) to the primary station for each of the plurality of packets. The signalling may be by any convenient means, for example transmitting each acknowledgement or negative acknowledgement via a different subset of available uplink paths.

Correspondence Address:  
**Corporate Patent Counsel**  
**U.S. Philips Corporation**  
**580 White Plains Road**  
**Tarrytown, NY 10591 (US)**


(73) Assignee: **KONINKLIJKE PHILIPS ELEC-**  
**TRONICS N.V.**(21) Appl. No.: **10/128,636**(22) Filed: **Apr. 23, 2002**(30) **Foreign Application Priority Data**

Apr. 25, 2001 (GB) ..... 0110125.2

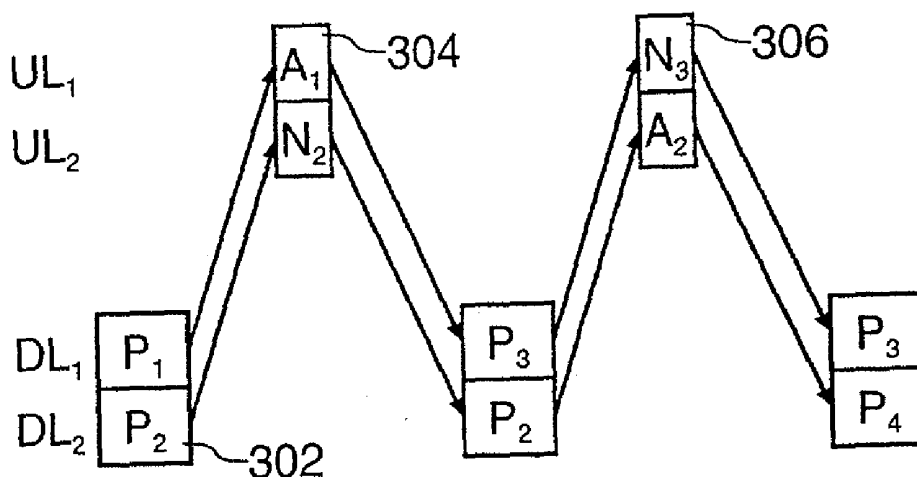


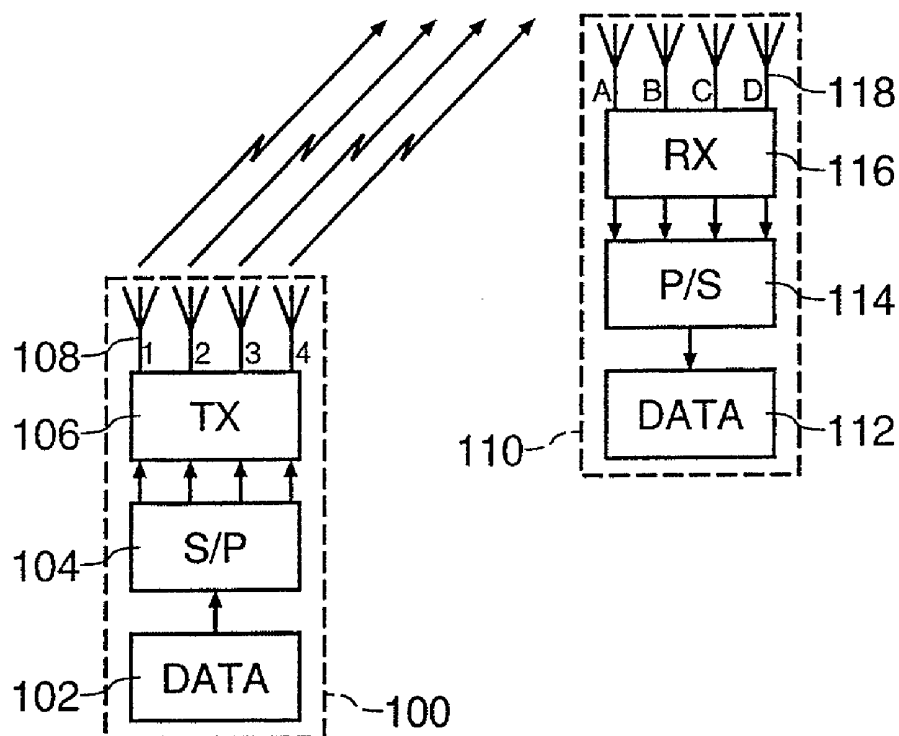


**FIG. 1**

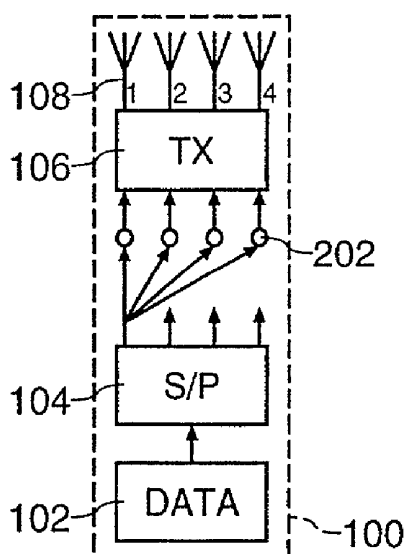


**FIG. 2**

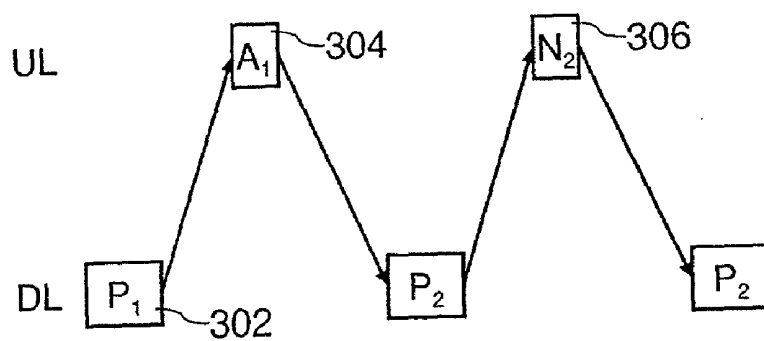


**FIG. 3**

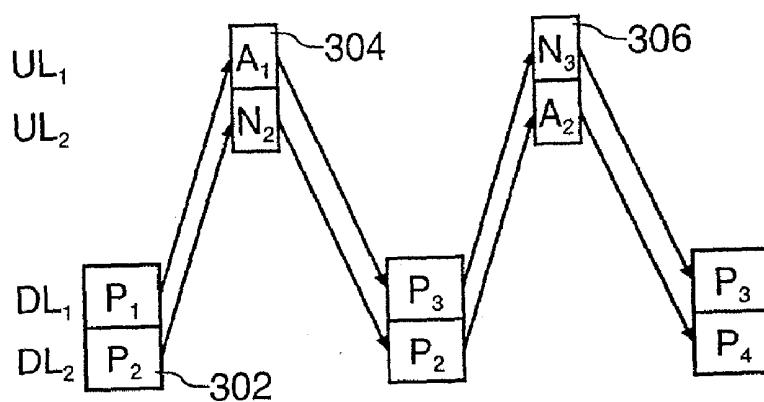


**FIG. 4**

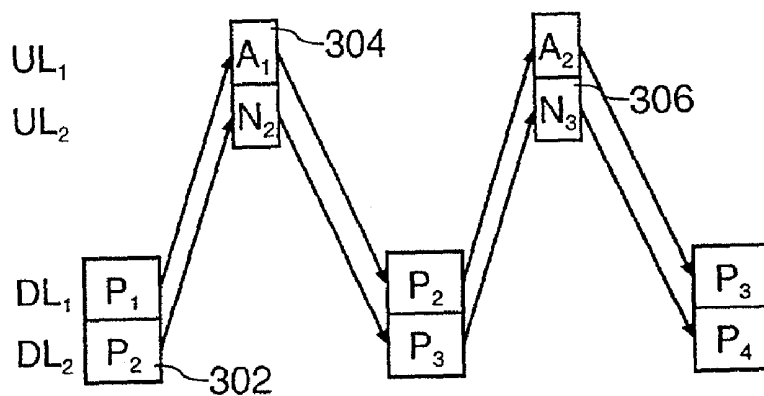

**FIG. 5**

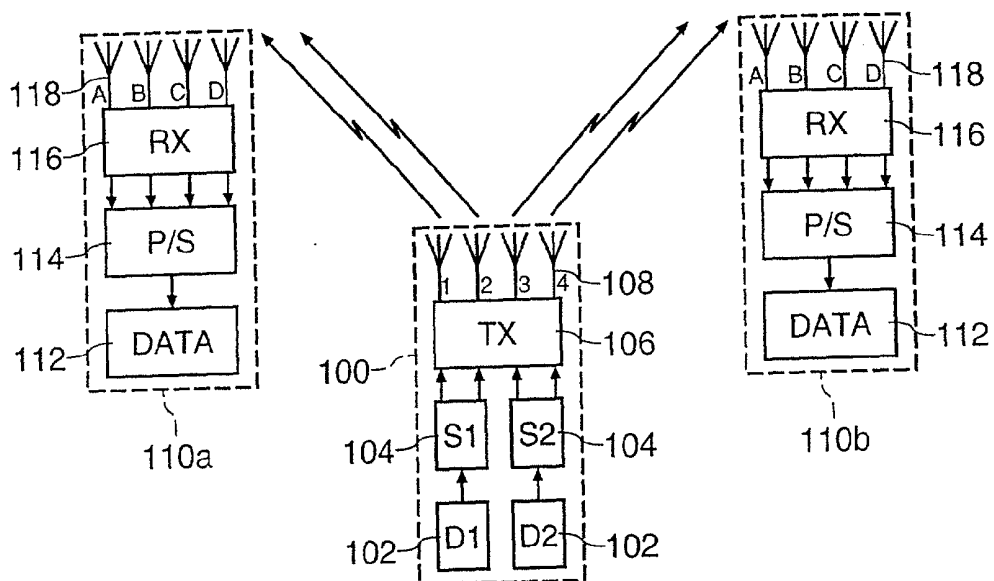

**FIG. 6**

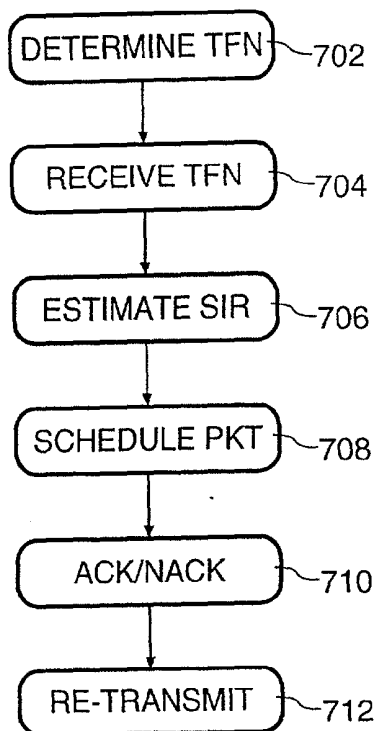

**FIG. 7**

## RADIO COMMUNICATION SYSTEM

[0001] The present invention relates to a radio communication system and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular reference to the Universal Mobile Telecommunication System (UMTS), it is to be understood that such techniques are equally applicable to use in other mobile radio systems.

[0002] In a radio communication system, radio signals typically travel from a transmitter to a receiver via a plurality of paths, each involving reflections from one or more scatterers. Received signals from the paths may interfere constructively or destructively at the receiver (resulting in position-dependent fading). Further, differing lengths of the paths, and hence the time taken for a signal to travel from the transmitter to the receiver, may cause inter-symbol interference.

[0003] It is well known that the above problems caused by multipath propagation can be mitigated by the use of multiple antennas at the receiver (receive diversity), which enables some or all of the multiple paths to be resolved. For effective diversity it is necessary that signals received by individual antennas have a low cross-correlation. Typically this is ensured by separating the antennas by a substantial fraction of a wavelength, although closely-spaced antennas may also be employed by using techniques disclosed in our International patent application WO01/71843 (applicant's reference PHGB000033). By ensuring use of substantially uncorrelated signals, the probability that destructive interference will occur at more than one of the antennas at any given time is minimised.

[0004] Similar improvements may also be achieved by the use of multiple antennas at the transmitter (transmit diversity). Diversity techniques may be generalised to the use of multiple antennas at both transmitter and receiver, known as a Multi-Input Multi-Output (MIMO) system, which can further increase system gain over a one-sided diversity arrangement. As a further development, the presence of multiple antennas enables spatial multiplexing, whereby a data stream for transmission is split into a plurality of sub-streams, each of which is sent via many different paths. One example of such a system is described in U.S. Pat. No. 6,067,290, another example, known as the BLAST system, is described in the paper "V-BLAST: an architecture for realising very high data rates over the rich-scattering wireless channel" by P W Wolniansky et al in the published papers of the 1998 URSI International Symposium on Signals, Systems and Electronics, Pisa, Italy, Sep. 29 to Oct. 2, 1998.

[0005] The performance gains which may be achieved from a MIMO system may be used to increase the total data rate at a given error rate, or to reduce the error rate for a given data rate, or some combination of the two. A MIMO system can also be controlled to reduce the total transmitted energy or power for a given data rate and error rate.

[0006] One area in which MIMO techniques may be applied is a High-Speed Downlink Packet Access (HSDPA) scheme, which is currently being developed for UMTS and which may facilitate transfer of packet data to a mobile station at up to 4 Mbps. In one proposed embodiment of

HSDPA separate data streams are sent from respective antennas at a Base Station (BS), which data streams can in principle be received and decoded by a Mobile Station (MS) having at least as many antennas as there are data streams. An ARQ (Automatic Repeat reQuest) scheme is needed to ensure correct delivery of each data packet, since accurate data transmission is viewed as more important than the reduced system throughput under poor channel conditions (due to multiple re-transmissions).

[0007] A problem with the use of a MIMO system for packet data transmission is the impact of differing radio link qualities on the communication system. For example, some of the data streams may have very poor quality radio links, and if all the data is combined this will degrade the performance of the other links.

[0008] An object of the present invention is to provide a MIMO system having improved performance.

[0009] According to a first aspect of the present invention there is provided a radio communication system having a communication channel comprising a plurality of paths between a primary station having a plurality of antennas and a secondary station having at least one antenna, wherein the primary station has means for transmitting substantially simultaneously a plurality of data packets to the secondary station, each packet being transmitted via a different subset of the plurality of paths, and the secondary station has means for receiving the plurality of data packets, for determining whether each packet is received correctly and for signalling this determination to the primary station for each of the plurality of packets.

[0010] By transmitting a plurality of packets in parallel, each via a subset of the available paths in the communication channel, improved performance is enabled compared with known systems in which each packet is transmitted via the same set of paths. This is because the effect of one of the paths providing a poor quality radio link is restricted to a subset of the transmitted packets.

[0011] According to a second aspect of the present invention there is provided a primary station having a plurality of antennas for use in a radio communication system having a communication channel comprising a plurality of paths between the primary station and a secondary station having at least one antenna, wherein means are provided for transmitting substantially simultaneously a plurality of data packets to the secondary station, each packet being transmitted via a different subset of the plurality of paths, and for receiving from the secondary station a determination of whether each packet is received correctly.

[0012] In one embodiment of the present invention each data packet is restricted to a subset of the available paths by mapping it to one of the primary station's antennas. In another embodiment, beamforming techniques are used to transmit each data packet in a particular direction. Data packets transmitted via one subset of paths may have different transmission parameters, for example modulation and/or coding schemes and power levels. Closed loop power control may be applied independently to each subset of paths.

[0013] According to a third aspect of the present invention there is provided a secondary station having at least one antenna for use in a radio communication system having a

communication channel comprising a plurality of paths between a primary station having a plurality of antennas and the secondary station, wherein means are provided for receiving a plurality of data packets transmitted substantially simultaneously by the primary station, each packet being transmitted via a different subset of the plurality of paths, for determining whether each packet is received correctly and for signalling this determination to the primary station for each of the plurality of packets.

**[0014]** The secondary station may signal its determination of whether each packet is received correctly via a subset of the available uplink paths to the primary station, or in any other suitable manner.

**[0015]** According to a fourth aspect of the present invention there is provided a method of operating a radio communication system having a communication channel comprising a plurality of paths between a primary station having a plurality of antennas and a secondary station having at least one antenna, wherein the primary station transmits substantially simultaneously a plurality of data packets to the secondary station, each packet being transmitted via a different subset of the plurality of paths, and the secondary station receives the plurality of data packets, determines whether each packet is received correctly and signals this determination to the primary station for each of the plurality of packets.

**[0016]** The present invention is based upon the recognition, not present in the prior art, that improved performance in a MIMO system used for packet data transfer can be obtained by transmitting data packets in parallel by different subsets of the available paths.

**[0017]** Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

**[0018]** **FIG. 1** is a block schematic diagram of an embodiment of a MIMO radio system;

**[0019]** **FIG. 2** is a block schematic diagram of an embodiment of a base station for a MIMO radio system which weights sub-stream signals before transmission;

**[0020]** **FIG. 3** is a diagram illustrating operation of a conventional ARQ scheme;

**[0021]** **FIG. 4** is a diagram illustrating operation of a first embodiment of an ARQ scheme in accordance with the present invention;

**[0022]** **FIG. 5** is a diagram illustrating operation of a second embodiment of an ARQ scheme in accordance with the present invention;

**[0023]** **FIG. 6** is a block schematic diagram of an embodiment of a MIMO radio system in which different sub-streams are directed at different terminals; and

**[0024]** **FIG. 7** is a flow chart illustrating operation of a MIMO radio system made in accordance with the present invention.

**[0025]** In the drawings the same reference numerals have been used to indicate corresponding features.

**[0026]** **FIG. 1** shows an example of a MIMO system for the transmission of downlink packet data from a primary station **100** to a secondary station **110**. The primary station

**100** comprises a data source **102** which provides a data stream for transmission to the secondary station **110**. This stream is divided by a serial to parallel converter (S/P) **104** to generate a plurality of data sub-streams which are provided to a transmitter (TX) **106**. The transmitter **106** arranges for the data sub-streams to be sent to multiple antennas **108** (labelled **1**, **2**, **3** and **4** in **FIG. 1**) for transmission from the Base Station (BS) **100** to a Mobile Station (MS) **110**. The antennas **108** are assumed to be substantially omni-directional (or designed to give coverage over a sector cell).

**[0027]** Suitable coding, typically including Forward Error Correction (FEC), may be applied by the BS **100** before multiplexing. This is known as vertical coding, and has the advantage that coding is applied across all sub-streams. However, problems may arise in extracting the sub-streams since joint decoding is needed and it is difficult to extract each sub-stream individually. As an alternative each sub-stream may be coded separately, a technique known as horizontal coding which may simplify receiver operation. These techniques are discussed for example in the paper "Effects of Iterative Detection and Decoding on the Performance of BLAST" by X Li et al in the Proceedings of the IEEE Globecom 2000 Conference, San Francisco, Nov. 27 to Dec. 1, 2000.

**[0028]** If vertical coding is used the FEC which is applied must have sufficient error-correcting ability to cope with the entire MIMO channel, which comprises a plurality of paths. It will be appreciated that the set of paths between BS **100** and MS **110** will typically include direct paths and indirect paths, the latter being where signals are reflected by one or more scatterers.

**[0029]** The MS **110** comprises a plurality of antennas **118** (labelled A, B, C and D in **FIG. 1**). Signals received by the antennas **118** are provided to a receiver (RX) **116**, which extracts the plurality of transmitted data sub-streams from the received signals. The data sub-streams are then recombined by a parallel to serial converter (P/S) **114** and provided to a data output block **112**. Although both the BS **100** and MS **110** are shown as having the same number of antennas, this is not necessary in practice and the numbers of antennas can be optimised depending on space and capacity constraints.

**[0030]** In the simplest implementation of a BS **100**, each data sub-stream is mapped to a separate antenna **108**. Such an implementation is appropriate for spatially uncorrelated radio channels. In the general case, for which a suitable BS **100** is illustrated in **FIG. 2**, each data sub-stream could be sent to each antenna **108** after applying a complex weight **202** (with one weight value per antenna **108** for each data sub-stream). This approach can be used to map each data sub-stream to a different antenna beam. The antenna beams may be aimed in predetermined directions, or the directions may be determined dynamically to take advantage of changing radio channel conditions. An example of a MIMO system with dynamically changing beam directions is disclosed in our co-pending unpublished United Kingdom patent application 0102316.7 (Applicant's reference PHGB010012). A special case of interest is where each data stream is mapped to a subset of the antennas (i.e. some of the weights are zero).

**[0031]** For simplicity, the following embodiments use the simplest case of a one-to-one mapping between data sub-

streams and antennas **108**, but it will be appreciated that the present invention is not limited to such a scenario.

**[0032]** In a packet data transmission system, ARQ can be used to correct any erroneous packets. An example of an ARQ scheme operating in known manner is illustrated in **FIG. 3**. Data packets **302**, identified as  $P_n$  where  $n$  is a sequence number, are transmitted in sequence on a downlink (DL) channel from a BS **100** to a MS **110**. In the illustrated scenario, the first data packet  $P_1$  is received correctly by the MS **110**, which transmits an acknowledgement ( $A_1$ ) **304** on an uplink channel (UL). In response to receipt of  $A_1$  by the BS **100**, the next packet awaiting transmission,  $P_2$ , is selected and transmitted to the MS **110**. However, this packet is not received correctly by the MS **110**, which issues a negative acknowledgement ( $N_2$ ) **306**. In response to this, the BS **100** transmits packet  $P_2$ .

**[0033]** Other techniques may be used instead of simple retransmission of a data packet **302** in response to a negative acknowledgement **306**. An example of such a technique is ARQ using incremental redundancy, where retransmissions relating to a packet are not identical to the originally-transmitted packet but include additional redundant information. Data throughput may be increased by use of other techniques, one example of which is  $n$ -channel stop-and-wait ARQ. This scheme takes advantage of the significant time gaps in the basic scheme shown in **FIG. 3** to permit transmission of up to  $n$  packets before any are positively acknowledged. An advantage over conventional stop-and-wait ARQ schemes (such as that shown in **FIG. 3**) is that if one packet is not received correctly, further packets may continue to be sent on the other channels in parallel with retransmissions of the packet received with errors. Such a scheme may also be used when a MS **110** has data links with a plurality of BSs **100**, as disclosed in our co-pending unpublished United Kingdom patent application 0104830.5 (Applicant's reference PHGB010028).

**[0034]** A simple embodiment of a MIMO packet data transmission scheme operating in accordance with the present invention is shown in **FIG. 4**. In this embodiment each data sub-stream is allocated a separate ARQ channel, and the BS **100** and MS **110** each have two antennas **108**, **118**. In the example shown, the BS **100** transmits two packets **302**,  $P_1$  and  $P_2$ , as part of respective downlink data sub-streams  $DL_1$  and  $DL_2$  transmitted from respective antennas **108**. The packets **302** are transmitted substantially simultaneously. This can be done in a CDMA (Code Division Multiple Access) system using the same channelisation and scrambling codes.

**[0035]** The MS **110** only receives packet  $P_1$  correctly, and hence transmits an acknowledgement ( $A_1$ ) **304** and a negative acknowledgement ( $N_2$ ) **306** as part of respective uplink data sub-streams  $UL_1$  and  $UL_2$  transmitted from respective antennas **118**. The positive and negative acknowledgements  $A_1$  and  $N_2$  are transmitted substantially simultaneously using the same channelisation and scrambling codes. In response, the BS **100** transmits the next packet  $P_3$  via sub-stream  $DL_1$  and re-transmits packet  $P_2$  via sub-stream  $DL_2$ . This time the MS **110** only receives packet  $P_2$  correctly, and therefore issues negative and positive acknowledgements,  $N_3$  and  $A_2$ , via respective uplink sub-streams  $UL_1$  and  $UL_2$ . As a result the BS **100** re-transmits packet  $P_3$  via sub-stream  $DL_1$  and transmits the next packet  $P_4$  via sub-stream  $DL_2$ .

**[0036]** In the general case, almost any mechanism could be used for transmission of the acknowledgements **304**, **306**, including time multiplexing on a single channel, or simultaneous transmission via different channels. The uplink transmission method and radio channel may also be different from that used on the downlink. The most important requirement is that an acknowledgement is received by the BS **100** in time for it to determine whether to send a re-transmission or a new packet **302**.

**[0037]** The BS **100** and/or MS **110** may make use of packets **302** received incorrectly to identify bad radio channels (i.e. bad antennas **108** or bad antenna beams), to enable performance to be optimised by avoiding such antennas or beams.

**[0038]** A variation on this embodiment is shown in **FIG. 5**, in which retransmission of a packet **302** which was not received correctly by the MS **110** takes place via a different sub-stream. This avoids the case that one packet is delayed substantially when interference prevents successful reception of any packets **302** via a particular sub-stream. In the example illustrated, the same packets **302** are transmitted but the sub-streams used for transmission of packet  $P_3$  and re-transmission of packet  $P_2$  are reversed compared to **FIG. 4**.

**[0039]** Since the radio link quality might be different for each sub-stream, data for respective sub-streams could be derived from different data sources with different quality requirements. The level of FEC applied to each sub-stream could optionally be varied depending on the quality of the radio link, as disclosed in our co-pending unpublished International patent application PCT/EP01/13690 (Applicant's reference PHGB 000168). Further, different choices of Modulation and Coding Scheme (MCS) could be made for different sub-streams, and the sub-streams could be transmitted at different power levels in response to different channel conditions.

**[0040]** In a further variation on the above embodiments, separate closed loop power control may be applied to the transmissions from each antenna **108** (e.g. using dedicated channels). Such a scheme could help with selection of an optimum antenna **108**, as well as selection of a suitable MCS, as disclosed in our co-pending unpublished International patent application PCT/IB01/02555 (Applicant's reference PHGB010022).

**[0041]** In another embodiment of the present invention, illustrated in **FIG. 6**, different sub-streams may be routed to different terminals **110a**, **110b**. In the example illustrated, a BS **100** comprises two data sources **102** ( $D1$  and  $D2$ ), each intended for a different MS **110**. Data from data source  $D1$ , intended for a first MS **110a**, is divided into two sub-streams by a serial to parallel converter **104** ( $S1$ ) and provided to a transmitter (TX) **106**. These two data sub-streams are transmitted via antennas **108** labelled **1** and **2**. Similarly, data from data source  $D2$ , intended for a second MS **110b**, is divided into two sub-streams by a serial to parallel converter **104** ( $S2$ ) and provided to the transmitter **106**. These two data sub-streams are transmitted via antennas **108** labelled **3** and **4**. It should be noted that this scheme does not require that antenna beams are directed towards the respective MSs **110a**, **110b**, although this may be implemented.

**[0042]** Using MIMO, in a scenario such as that shown in **FIG. 1** or **6**, each MS **110** receiving any data with a given

channelisation code must, in general, have sufficient antennas **118** or other means to separate each of the different data sub-streams, perhaps discarding any unwanted ones. In known MIMO systems this requires at least  $M$  antennas, where  $M$  is the number of independent data sub-streams being transmitted with that channelisation code.

[0043] In order to obtain good performance in scheduling the use of downlink resources (channelisation codes and power) it is desirable that the downlink channel quality is known at the BS **100** for each possible radio link. This could be signalled directly for each sub-stream or determined in some other way (for example by the use of closed loop power control or feedback signals for antenna diversity). It is also important that the number of antennas, or ability to process multiple data streams, at each MS **110** is known to the BS **100**. This could be signalled as a part of a registration process, in which the MS **110** informs the BS **100** of its capabilities.

[0044] FIG. 7 is a flow chart illustrating one possible application of a method in accordance with the present invention to HSDPA. The method comprises the following steps:

[0045] 702. A MS **110** uses pilot signals from each antenna **108** at the BS **100** to determine transfer function for each antenna pair.

[0046] 704. The BS **100** receives information from each MS **110** on the channel transfer function between each pair of antennas **108**, **118** at the BS **100** and MS **110**.

[0047] 706. The BS **100** estimates achievable SIRs for each antenna pair (optionally using other information, such as from closed loop power control).

[0048] 708. Based on the SIR information the BS **100** schedules transmissions of data packets to mobiles **110**, selecting: modulation, coding scheme, channelisation code(s) and antenna **108** for each packet **302**. Typically, there would be constraints imposed by number of available channelisation codes, and maximum output power per antenna **108**.

[0049] 710. Each MS **110** sends an ACKnowledgement (ACK) **304** for packets **302** received correctly and a Negative ACKnowledgement (NACK) **306** for packets **302** received incorrectly.

[0050] 712. Erroneous packets **302** are scheduled for re-transmission by the BS **100** (with the exact contents of the re-transmission being determined according to the ARQ scheme being used).

[0051] There are a range of possible alternatives for the scheduling at step **708**, for example, packets could be sent by the BS **100** in the order received, or preference could be given to sending data over radio links with high SIR. In an embodiment employing beamforming, to direct antenna beams in particular directions, more detailed information on the channel is needed at the BS **100** (to allow the correct antenna weights **202** to be used). This information may need to be signalled from the MS **110**. Signalling to a MS **110** may also be needed to indicate which antenna transmissions (or beams) contain data for it, and which should be rejected as unwanted interference.

[0052] The present invention can be applied to mobile radio (e.g. UMTS), cordless and WLAN systems. It is particularly suited to the HSDPA concept, but not limited to it. The description above relates to a UMTS Frequency Division Duplex (FDD) mode. The invention could also be applied to a Time Division Duplex (TDD) system. In this case the fact that the uplink and downlink channel use different time slots at the same frequency (i.e. reciprocal channel) could reduce the need for signalling of channel information.

[0053] The present invention is also particularly applicable to CDMA systems in which the BS **100** typically provides pilot information to facilitate channel estimation. In the case of CDMA the possibility is already known of sending multiple data streams with different spreading codes or the same spreading code offset in time. These techniques can be used in conjunction with the present invention, in which more than one data stream has the same spreading code.

[0054] In the above description, the term 'Base Station' or 'Primary Station' relates to an entity which may in practice be distributed between a variety of parts of the fixed infrastructure. In a UMTS system, for example the functions of a BS **100** are carried out in a "Node B", which is the part of the fixed infrastructure directly interfacing with a MS **110**, and at a higher level in the Radio Network Controller (RNC). As well as their use in transmission of data packets from a BS **100** to a MS **110**, the techniques described may also be used for packet transmission in the reverse direction. In this case, the roles of the BS **100** and MS **110** would be reversed in the description above, with the BS **100** adopting the role of a secondary station and the MS **110** the role of a primary station.

[0055] From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein.

[0056] In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

1. A radio communication system having a communication channel comprising a plurality of paths between a primary station having a plurality of antennas and a secondary station having at least one antenna, wherein the primary station has means for transmitting substantially simultaneously a plurality of data packets to the secondary station, each packet being transmitted via a different subset of the plurality of paths, and the secondary station has means for receiving the plurality of data packets, for determining whether each packet is received correctly and for signalling this determination to the primary station for each of the plurality of packets.

2. A primary station having a plurality of antennas for use in a radio communication system having a communication channel comprising a plurality of paths between the primary station and a secondary station having at least one antenna, wherein means are provided for transmitting substantially



simultaneously a plurality of data packets to the secondary station, each packet being transmitted via a different subset of the plurality of paths, and for receiving from the secondary station a determination of whether each packet is received correctly.

**3.** A primary station as claimed in claim 2, characterised in that means are provided for mapping each data packet to one of the plurality of antennas.

**4.** A primary station as claimed in claim 2, characterised in that weighting means are provided for mapping each data packet to a respective antenna beam.

**5.** A primary station as claimed in claim 2, characterised in that means are provided for varying transmission parameters relating to a data packet depending on the subset of paths over which the packet is transmitted.

**6.** A primary station as claimed in claim 5, characterised in that the varied transmission parameters are selected from modulation scheme, coding scheme and transmit power level.

**7.** A primary station as claimed in claim 5, characterised in that closed loop power control means are provided for adjusting independently the transmit power of each subset of paths.

**8.** A primary station as claimed in claim 2, characterised in that means are provided for retransmitting a data packet which was not received correctly by the secondary station via a different subset of the plurality of paths from that used for initial transmission of the data packet.

**9.** A secondary station having at least one antenna for use in a radio communication system having a communication channel comprising a plurality of paths between a primary station having a plurality of antennas and the secondary station, wherein means are provided for receiving a plurality of data packets transmitted substantially simultaneously by the primary station, each packet being transmitted via a different subset of the plurality of paths, for determining whether each packet is received correctly and for signalling this determination to the primary station for each of the plurality of packets.

**10.** A secondary station as claimed in claim 9, characterised in that a communication channel between the secondary station and the primary station comprises a plurality of paths and in that the means for signalling the determination of correct reception to the primary station comprises means for transmitting substantially simultaneously acknowledgements corresponding to each of the simultaneously transmitted data packets, each acknowledgement being transmitted via a different subset of the plurality of paths.

**11.** A secondary station as claimed in claim 9, characterised in that means are provided for signalling channel quality feedback information to the primary station, the information relating to each of the subset of paths used to transmit data packets.

**12.** A secondary station as claimed in claim 9, characterised in that means are provided for signalling to the primary station the number of simultaneous data streams, transmitted via subsets of the plurality of paths using the same air interface resources, that the secondary station can receive or process simultaneously.

**13.** A secondary station as claimed in claim 12, characterised in that the system operates according to a code division multiple access protocol and in that the air interface resources comprise channelisation and spreading codes.

**14.** A method of operating a radio communication system having a communication channel comprising a plurality of paths between a primary station having a plurality of antennas and a secondary station having at least one antenna, wherein the primary station transmits substantially simultaneously a plurality of data packets to the secondary station, each packet being transmitted via a different subset of the plurality of paths, and the secondary station receives the plurality of data packets, determines whether each packet is received correctly and signals this determination to the primary station for each of the plurality of packets.

\* \* \* \* \*