

DESCRIPTION

To prevent loosening of the hose connection on the Halo please follow the following directions and use a small amount of the included Loctite 567 thread sealant or equivalent as a thread locker.

TOOLS



A. Channel-lock pliers




B. 5/8" wrench




C. Loctite 567 or equivalent

HOSE ATTACHMENT INSTRUCTIONS

STEP 1: Apply one small strip of thread sealant (C) along threads and hand tighten hoses onto Halo.

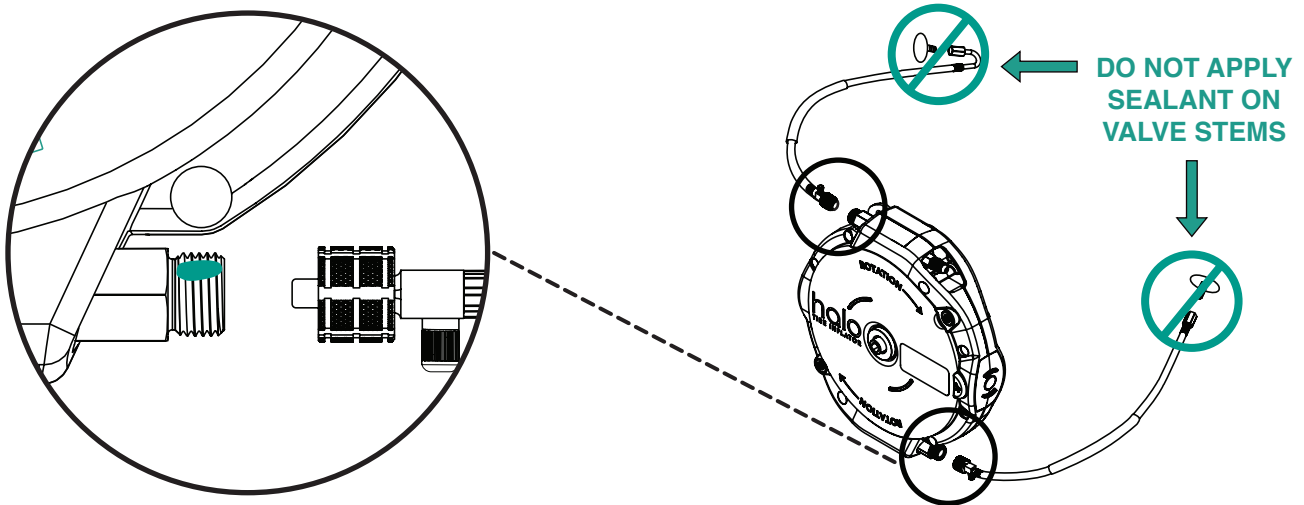

STEP 2: Use tools to tighten hoses onto the Halo.

- 1 Ensure that the T-stem is facing outward from the Halo.
- 2 Use 5/8" wrench (B) to hold the hose connector on the Halo to prevent it from rotating during tightening. 
- 3 Use channellock pliers (A) to turn the hose swivel and tighten the hoses onto the Halo. 