



## Memoirs®

66" x 42" whirlpool bath  
**K-1170-JHH**

### Features

- Eight Flexjet® hydromassage jets can be individually adjusted for water flow and direction.
- Built-in heater.
- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath.
- Generous 66" length provides spacious bathing for up to two people.
- Integral lumbar support.
- Multiple pump location options give you more choices for installation and access. (See specification sheet for pump locations.)
- Coordinates with other products in the Memoirs collection.

### Material

- Acrylic.

### Technology

- Whirlpool jets recirculate water, providing targeted relief for the bather.

### Installation

- Drop-in.
- Center rear drain.

### Required Products/Accessories

K-11677 Bath Drain

### Recommended Products/Accessories

K-1446 Remote Installation Kit  
K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor  
K-24916 Wireless Music Kit  
K-37380 30" Rough-in Cable Bath Drain  
K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing  
K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-7213 27" Cable Bath Drain  
K-7214 27" Cable Bath Drain  
K-7259 Brass toe tap bath drain  
K-9497 2-1/2" Keypad Trim  
K-702200-L Frameless Sliding Bath Door  
K-702204-L Frameless Sliding Bath Door  
K-702205-L Frameless Sliding Bath Door  
K-1177 Vinyl Tiling-in Bead

### Included Components

Additional Components:  
40" (1016 mm) cable



### Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2


### KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.



### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune

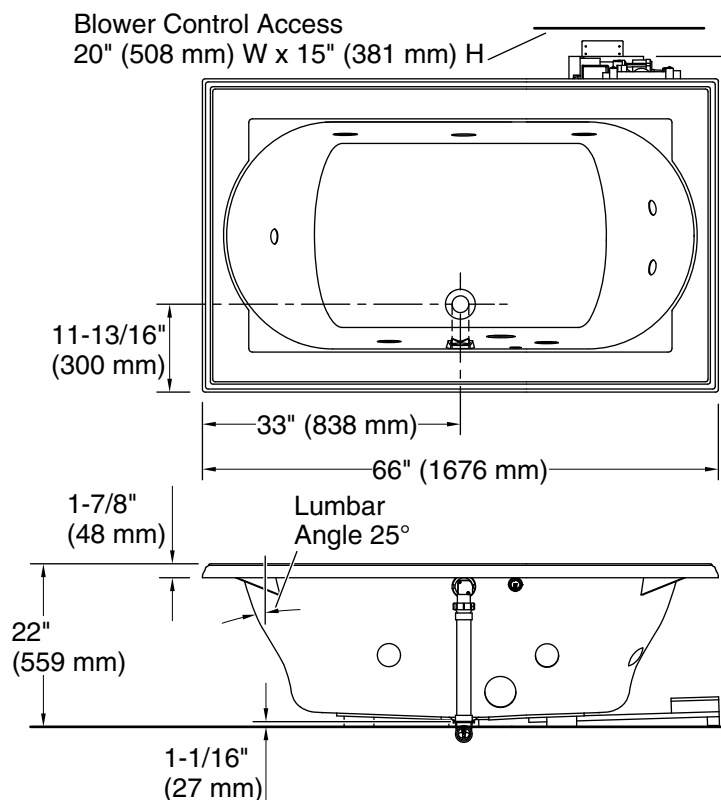

No change in measurements if connected with drain illustrated. (K-7161-AF)

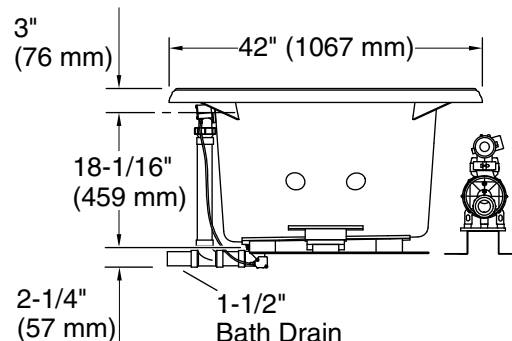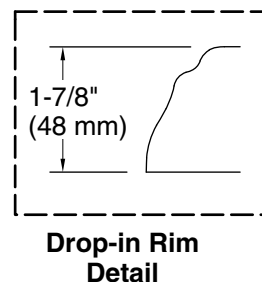

## Required Electrical Service

Two dedicated circuits required.

Pump: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

## Technical Information

All product dimensions are nominal.

Installation: Drop-in

Basin area, bottom: 42" x 27" (1067 mm x 686 mm)

Basin area, top: 54" x 30" (1372 mm x 762 mm)

Weight: 129 lbs (58.5 kg)

Minimum floor load: 44 lbs/ft² (214.8 kg/m²)

Water depth: 16" (406 mm)

Water capacity: 81 gal (306.6 L)

Electrical component rating: Pump: 120 V, 7 A, 60 Hz  
Heater: 120 V, 12 A, 60 Hz

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.