

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____

RD-100-R

Overflow Roof Drain with 2" External Water Dam


Specification

Watts RD-100-R epoxy coated cast iron overflow roof drain with flashing clamp with integral 2"(51) high external water dam, self-locking polyethylene dome (standard), and no hub (standard) outlet.

Suffix	Pipe Size Description	
2	2"(51) Pipe Size (NH Only)	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐
5	5"(127) Pipe Size (NH Only)	☐
6	6"(152) Pipe Size	☐

Suffix	Outlet Type Description	
NH	No Hub (M.J)	☐
P	Push On	☐
T	Threaded Outlet	☐
X	Inside Caulk	☐

Suffix	Options Description	
-13	Galvanized Body & Clamp	☐
-B	Sump Receiver	☐
-D	Underdeck Clamp	☐
-F	Deck Flange/Adj. Extension	☐
-GSS	Stainless Steel Ballast Guard	☐
-K	Ductile Iron Dome	☐
-K13	Galvanized Dome	☐
-K40	Ductile Iron Low Dome (4" High)	☐
-K80	Aluminum Dome	☐
-K81	Rough Bronze Dome	☐
-K83	SS Mesh Covered Dome	☐
-L	Vandal Proof Dome	☐
-SO	Side Outlet (2", 3", 4" Only)	☐
-V	Fixed Extension (2", 3", 4")	☐

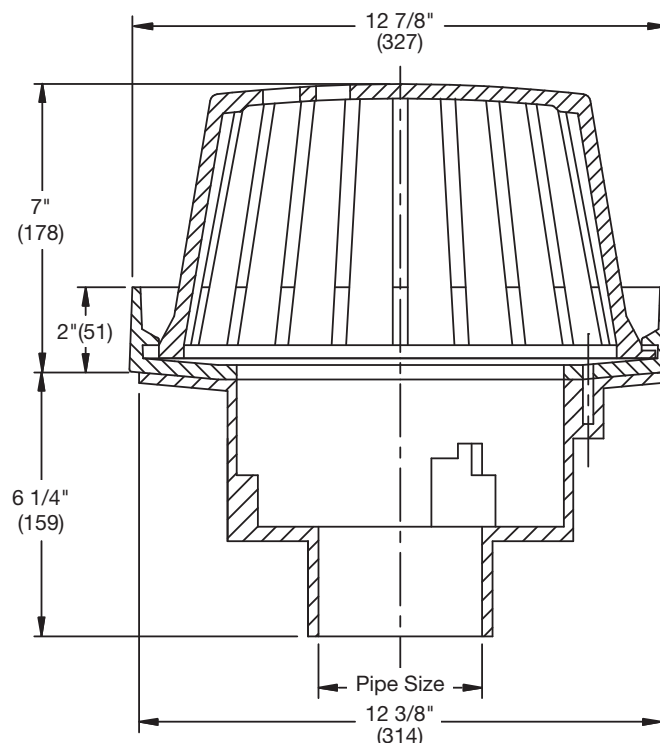

Suffix	Optional Body Material Description	
-60	PVC Body w/Socket Outlet	☐
-61	ABS Body w/Socket Outlet	☐

Deck Opening 10"(254)
with sump receiver 13 1/4"(337)

Free Area
Sq. In.
137

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com

Canada: T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-RD-100-R 2139

© 2021 Watts