

Submittal Data: UTR-H1806L
Header 96,500 to 193,000 Btu or less

Separation Tube

Job Name: _____

Date: _____

Location: _____

Approval: _____

Engineer: _____

Construction: _____









Submitted to: _____

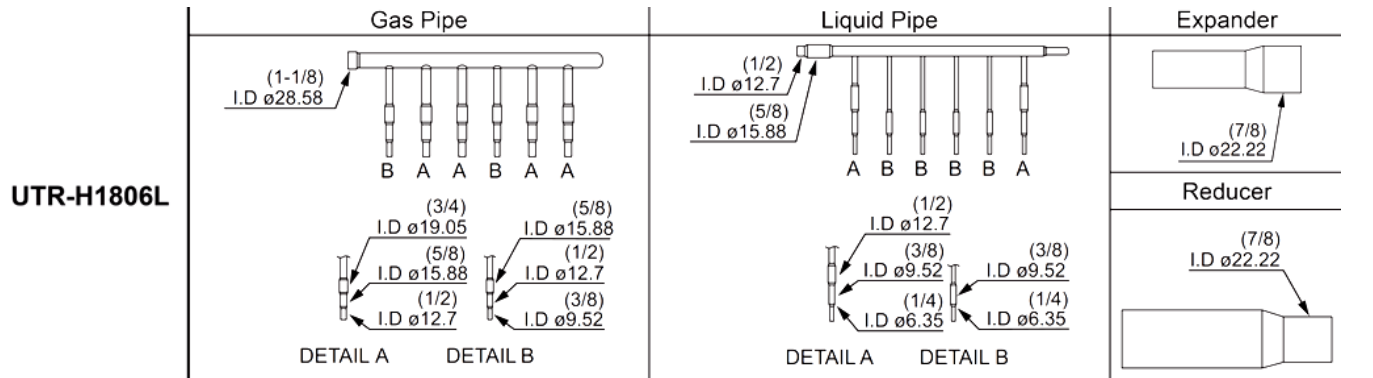
Unit #: _____

Submitted by: _____

Drawing #: _____

Reference: _____

	Gas Pipe	Liquid Pipe	Expander	Closed Pipe
UTR-H1806L				
				$\varnothing 6.35$ (1/4) 4 pcs $\varnothing 9.52$ (3/8) 2 pcs $\varnothing 12.7$ (1/2) 2 pcs
	Insulation	Closed Pipe Insulation	Binder	Reducer
				
	Large 1 pcs Small 1 pcs	6 pcs	10 pcs	1 pcs



Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB.
 Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB.
 Pipe length: 25ft.(7.5 m). Height difference: 0ft. (0m) (Outdoor unit – Indoor unit). Built-in protective functions may limit capacity or shut off unit if unit is operated outside of unit design operating temperature ratings.