




2-16. IR receiver unit (UTY-TRHX)




3D flow cassette type and Duct type indoor unit can be controlled with Wireless remote controller if the IR receiver unit is used.

■ Accessory


Name and shape	Q'ty	Application
 Cover	1	For receiver unit
 Insulation	1	For receiver unit
 Cable tie	Small: 1 Medium: 1	For receiver unit
 Screw (M4 × 10 mm)	2	For attaching the hook metal to the indoor unit
 Screw (M4 × 12 mm)	1	For attaching the hook metal to holder cover
 Screw (M4 × 20 mm)	2	For installing receiver unit to wall, etc.
 Connection cable A (5 m)	1	For connecting PCB of indoor unit to receiver unit
 Connection cable B (0.2 m)	1	
 Hook metal	1	For installing receiver unit to indoor unit
 Bracket (cover)	1	For receiver unit
 Installation manual	1	

Overview

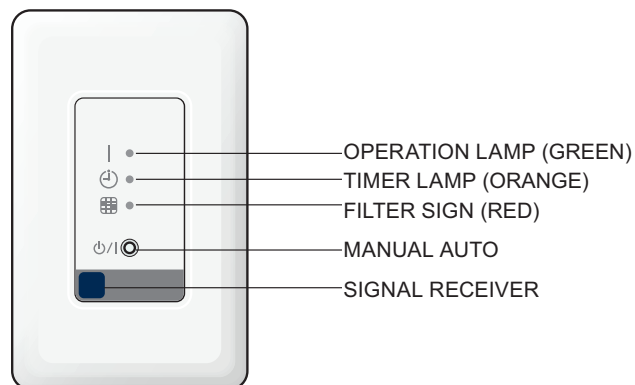

System diagrams


Attachment range

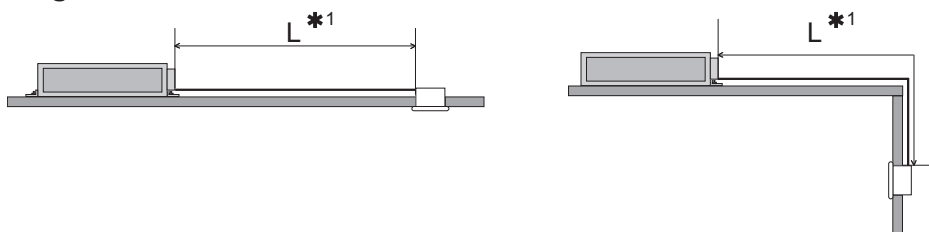


*1: Connection cable length L

- Cable A (Standard accessory): 5 m
- Cable C (Optional service part): 10 m

Signal angle

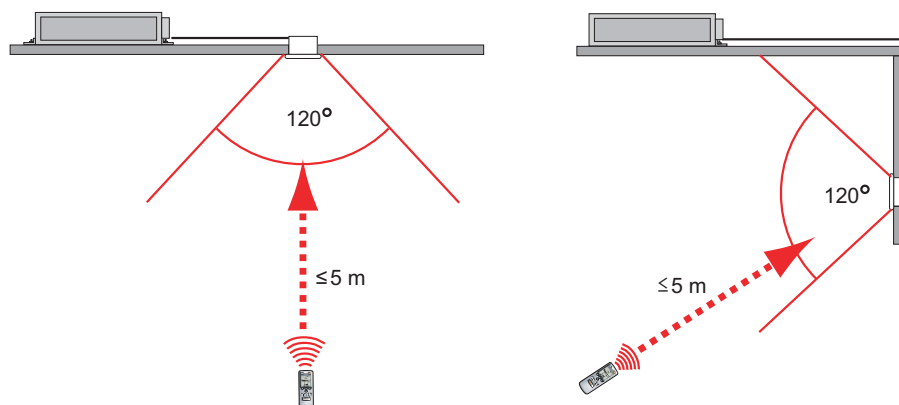

Electrical wiring

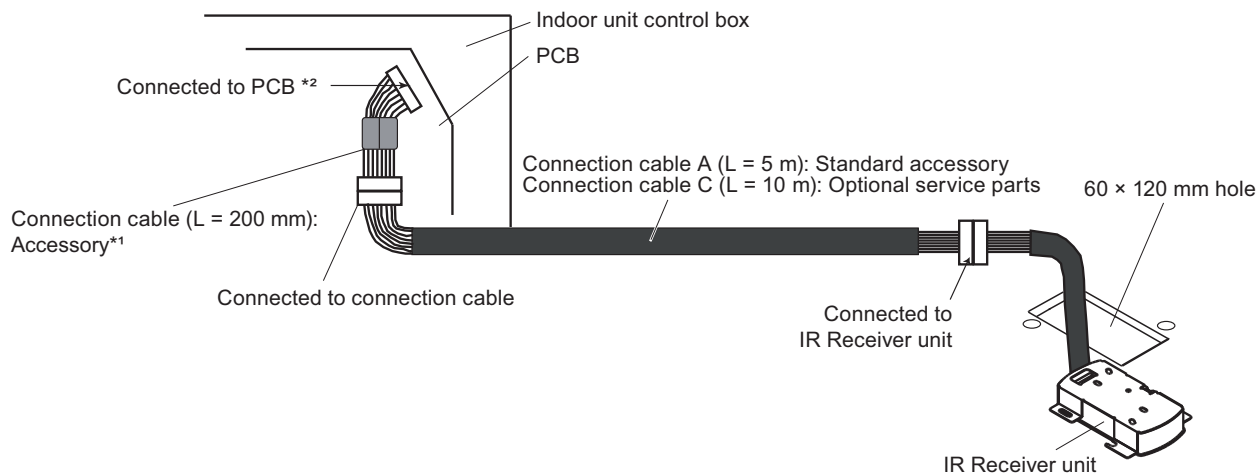

*1: Connection cable


Connection cable B

*2: Connected to PCB

CN48

Dimensions

Unit: mm

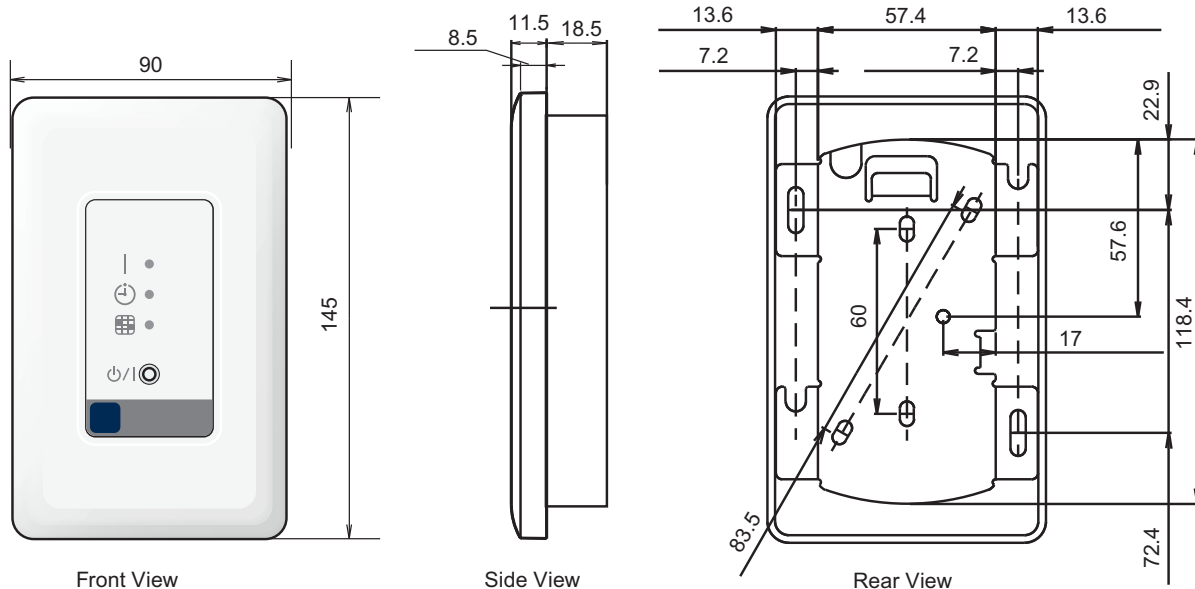


Specifications

Dimensions (H × W × D)	mm	145 × 90 × 30
Weight	g	150

Optional service part

Use the parts number shown below to order the cable from your representative.

Use the shield type connection cable in accordance with standard of your country.

Name and shape	Application	Parts No.
 IR receiver unit cable C (10 m)	For extending the IR receiver unit cable	9710358012

NOTE: This part cannot be used for 3D flow cassette type.