

(12) **United States Patent**
Hotelling

(10) **Patent No.:** **US 9,360,967 B2**
(45) **Date of Patent:** **Jun. 7, 2016**

(54) **MUTUAL CAPACITANCE TOUCH SENSING DEVICE**

(75) Inventor: **Steve Hotelling**, San Jose, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1653 days.

4,115,670 A 9/1978 Chandler
4,121,204 A 10/1978 Welch et al.
4,129,747 A 12/1978 Pepper
4,158,216 A 6/1979 Bigelow
4,242,676 A 12/1980 Piguett et al.
4,246,452 A 1/1981 Chandler
4,264,903 A 4/1981 Bigelow
4,266,144 A * 5/1981 Bristol 307/116
4,293,734 A 10/1981 Pepper, Jr.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1139235 A 1/1997
CN 1455615 11/2003

(Continued)

OTHER PUBLICATIONS

SanDisk Sansa Connect User Guide; 29 pages.

(Continued)

(21) Appl. No.: **11/482,286**

(22) Filed: **Jul. 6, 2006**

(65) **Prior Publication Data**

US 2008/0006453 A1 Jan. 10, 2008

(51) **Int. Cl.**
G06F 3/044 (2006.01)

(52) **U.S. Cl.**
CPC **G06F 3/044** (2013.01)

(58) **Field of Classification Search**
CPC G06F 3/044; G06F 2203/04104; G06F 2203/04106; G06F 3/03547; H04M 2250/22
USPC 345/173
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,061,578 A 5/1913 Wischhusen et al.
2,063,276 A 12/1936 Thomas
2,903,229 A 2/1956 Landge
2,798,907 A 7/1957 Schneider
2,945,111 A 10/1958 McCormick
3,005,055 A 10/1961 Matke
3,965,399 A 6/1976 Walker et al.
3,996,441 A 12/1976 Ohashi
4,029,915 A 6/1977 Ojima
4,103,252 A 7/1978 Bobick
4,110,749 A 8/1978 Janko et al.


Primary Examiner — Viet Pham

(74) *Attorney, Agent, or Firm* — Morrison & Foerster LLP

(57) **ABSTRACT**

A mutual capacitive touch sensing device is disclosed. The touch sensing device includes a mutual capacitive sensing controller having a plurality of distinct drive lines and a plurality of distinct sense lines; a source for driving a current or voltage separately through each drive line; and a mutual capacitance sensing circuit that monitors the capacitance at the sensing lines. The touch sensing device also includes a plurality of independent and spatially distinct mutual capacitive sensing nodes set up in a non two dimensional array. Each node includes a drive electrode that is spatially separated from a sense electrode. The drive electrode is coupled to one of the drive lines and the sense electrode is coupled to one of the sense lines. Each node is set up with a different combination of drive and sense line coupled thereto.

28 Claims, 9 Drawing Sheets

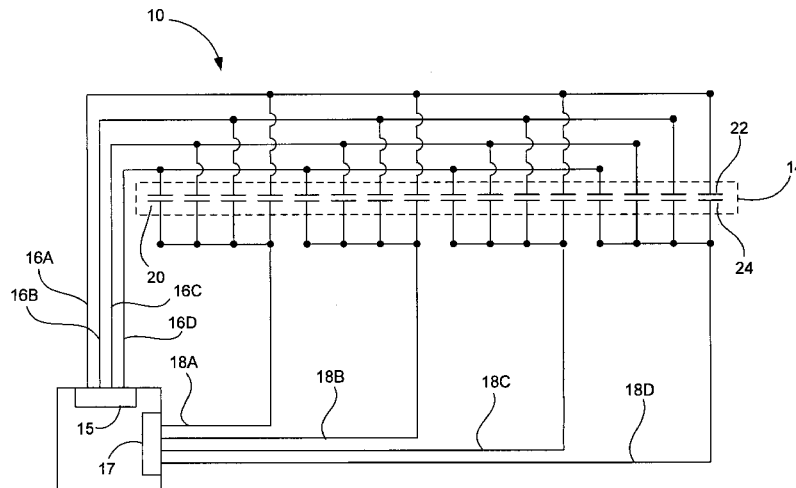

(56)

References Cited

U.S. PATENT DOCUMENTS

D264,969	S	6/1982	McGourty	5,543,588	A	8/1996	Bisset et al.
4,338,502	A	7/1982	Hashimoto et al.	5,543,591	A	8/1996	Gillespie et al.
4,380,007	A	4/1983	Steinegger	5,555,004	A	9/1996	Ono et al.
4,380,040	A	4/1983	Posset	5,559,301	A	9/1996	Bryan, Jr. et al.
4,394,649	A	7/1983	Suchoff et al.	5,559,943	A	9/1996	Cyr et al.
4,475,008	A	10/1984	Doi et al.	5,561,445	A	10/1996	Miwa et al.
4,570,149	A	2/1986	Thornburg et al.	5,564,112	A	10/1996	Hayes et al.
4,583,161	A	4/1986	Gunderson et al.	5,565,887	A	10/1996	McCambridge et al.
4,587,378	A	5/1986	Moore	5,578,817	A	11/1996	Bidiville et al.
4,604,786	A	8/1986	Howie, Jr.	5,581,670	A	12/1996	Bler et al.
4,613,736	A	9/1986	Shichijo et al.	5,585,823	A	12/1996	Duchon et al.
4,644,100	A	2/1987	Brenner et al.	5,589,856	A	12/1996	Stein et al.
4,719,524	A	1/1988	Morishima et al.	5,589,893	A	12/1996	Gaughan et al.
4,734,034	A	3/1988	Maness et al.	5,596,347	A	1/1997	Robertson et al.
4,736,191	A *	4/1988	Matzke et al. 341/20	5,596,697	A	1/1997	Foster et al.
4,739,191	A	4/1988	Puar	5,598,183	A	1/1997	Robertson et al.
4,739,299	A	4/1988	Eventoff et al.	5,611,040	A	3/1997	Brewer et al.
4,752,655	A	6/1988	Tajiri et al.	5,611,060	A	3/1997	Belfiore et al.
4,755,765	A	7/1988	Ferland	5,613,137	A	3/1997	Bertram et al.
4,764,717	A	8/1988	Tucker et al.	5,617,114	A	4/1997	Bier et al.
4,771,139	A	9/1988	DeSmet	5,627,531	A	5/1997	Posso et al.
4,798,919	A	1/1989	Miessler et al.	5,632,679	A	5/1997	Tremmel
4,810,992	A	3/1989	Eventoff	5,640,258	A	6/1997	Kurashima et al.
4,822,957	A	4/1989	Talmage, Jr. et al.	5,648,642	A *	7/1997	Miller et al. 178/18.06
4,831,359	A	5/1989	Newell	D382,550	S	8/1997	Kaneko et al.
4,849,852	A	7/1989	Mullins	5,657,012	A	8/1997	Tart
4,856,993	A	8/1989	Maness et al.	5,661,632	A	8/1997	Register
4,860,768	A	8/1989	Hon et al.	D385,542	S	10/1997	Kaneko et al.
4,866,602	A	9/1989	Hall	5,675,362	A	10/1997	Clough et al.
4,876,524	A	10/1989	Jenkins	5,689,285	A	11/1997	Asher
4,897,511	A	1/1990	Itaya et al.	5,721,849	A	2/1998	Amro
4,914,624	A	4/1990	Dunthorn	5,726,687	A	3/1998	Belfiore et al.
4,917,516	A	4/1990	Retter	5,729,219	A	3/1998	Armstrong et al.
4,943,889	A	7/1990	Ohmatoi	5,730,165	A	3/1998	Philipp
4,951,036	A	8/1990	Grueter et al.	5,748,185	A	5/1998	Stephan et al.
4,954,823	A	9/1990	Binstead	5,751,274	A	5/1998	Davis
4,976,435	A	12/1990	Shatford et al.	5,754,890	A	5/1998	Holmdahl et al.
4,990,900	A	2/1991	Kikuchi	5,764,066	A *	6/1998	Novak et al. 324/662
5,008,497	A	4/1991	Asher	5,777,605	A	7/1998	Yoshinobu et al.
5,036,321	A	7/1991	Leach et al.	5,786,818	A	7/1998	Brewer et al.
5,053,757	A	10/1991	Meadows	5,790,769	A	8/1998	Buxton et al.
5,086,870	A	2/1992	Bolduc	5,798,752	A	8/1998	Buxton et al.
5,125,077	A	6/1992	Hall	5,805,144	A	9/1998	Scholder et al.
5,159,159	A	10/1992	Asher	5,808,602	A	9/1998	Sellers
5,179,648	A	1/1993	Hauck	5,812,239	A	9/1998	Eger
5,186,646	A	2/1993	Pederson	5,812,498	A	9/1998	Terés
5,192,082	A	3/1993	Inoue et al.	5,815,141	A	9/1998	Phares
5,193,669	A	3/1993	Demeo et al.	5,825,351	A *	10/1998	Tam 345/173
5,231,326	A	7/1993	Echols	5,825,352	A	10/1998	Bisset et al.
5,237,311	A	8/1993	Mailey et al.	5,825,353	A	10/1998	Will
5,278,362	A	1/1994	Ohashi	5,828,364	A	10/1998	Siddiqui
5,305,017	A *	4/1994	Gerpheide 345/174	5,838,304	A	11/1998	Hall
5,313,027	A	5/1994	Inoue et al.	5,841,078	A *	11/1998	Miller et al. 178/18.06
D349,280	S	8/1994	Kaneko	5,841,423	A	11/1998	Carroll, Jr. et al.
5,339,213	A	8/1994	O'Callaghan	D402,281	S	12/1998	Ledbetter et al.
5,367,199	A	11/1994	Lefkowitz et al.	5,850,213	A	12/1998	Imai et al.
5,374,787	A	12/1994	Miller et al.	5,856,645	A	1/1999	Norton
5,379,057	A	1/1995	Clough et al.	5,856,822	A	1/1999	Du et al.
5,404,152	A	4/1995	Nagai	5,859,629	A	1/1999	Tognazzini
5,408,621	A	4/1995	Ben-Arie	5,861,875	A *	1/1999	Gerpheide 345/174
5,414,445	A	5/1995	Kaneko et al.	5,869,791	A	2/1999	Young
5,416,498	A	5/1995	Grant	5,875,311	A	2/1999	Bertram et al.
5,424,756	A	6/1995	Ho et al.	5,883,619	A	3/1999	Ho et al.
5,432,531	A	7/1995	Calder et al.	5,889,236	A	3/1999	Gillespie et al.
5,438,331	A	8/1995	Gilligan et al.	5,889,511	A	3/1999	Ong et al.
D362,431	S	9/1995	Kaneko et al.	5,894,117	A	4/1999	Kamishima
5,450,075	A	9/1995	Waddington	5,903,229	A	5/1999	Kishi
5,453,761	A	9/1995	Tanaka	5,907,152	A	5/1999	Dandiliker et al.
5,473,343	A	12/1995	Kimmich et al.	5,907,318	A	5/1999	Medina
5,473,344	A	12/1995	Bacon et al.	5,909,211	A	6/1999	Combs et al.
5,479,192	A	12/1995	Carroll, Jr. et al.	5,910,802	A	6/1999	Shields et al.
5,494,157	A	2/1996	Golenz et al.	5,914,706	A	6/1999	Kono
5,495,566	A	2/1996	Kwatinetz	5,923,388	A	7/1999	Kurashima et al.
5,508,703	A	4/1996	Okamura et al.	D412,940	S	8/1999	Kato et al.
5,508,717	A	4/1996	Miller	5,933,102	A	8/1999	Miller et al.
				5,933,141	A	8/1999	Smith
				5,936,619	A	8/1999	Nagasaki et al.
				5,943,044	A	8/1999	Martinelli et al.
				5,953,000	A	9/1999	Weirich

(56)

References Cited

U.S. PATENT DOCUMENTS

5,956,019	A	9/1999	Bang et al.	6,452,514	B1 *	9/2002	Philipp	341/33
5,959,610	A	9/1999	Silfvast	6,465,271	B1 *	10/2002	Ko et al.	438/48
5,959,611	A	9/1999	Smailagic et al.	6,473,069	B1	10/2002	Gerpheide	
5,964,661	A	10/1999	Dodge	6,492,602	B2	12/2002	Asai et al.	
5,973,668	A	10/1999	Watanabe	6,492,979	B1	12/2002	Kent et al.	
6,000,000	A	12/1999	Hawkins et al.	6,496,181	B1	12/2002	Bomer et al.	
6,002,093	A	12/1999	Hrehor et al.	6,497,412	B1	12/2002	Bramm	
6,002,389	A	12/1999	Kasser et al.	D468,365	S	1/2003	Bransky et al.	
6,005,299	A	12/1999	Hengst	D469,109	S	1/2003	Andre et al.	
6,025,832	A	2/2000	Sudo et al.	D472,245	S	3/2003	Andre et al.	
6,031,518	A	2/2000	Adams et al.	6,546,231	B1	4/2003	Someya et al.	
6,034,672	A	3/2000	Gaultier et al.	6,587,091	B2	7/2003	Serpa	
6,057,829	A	5/2000	Silfvast	6,606,244	B1	8/2003	Liu et al.	
6,075,533	A	6/2000	Chang	6,618,909	B1	9/2003	Yang	
6,084,574	A	7/2000	Bidiville	6,636,197	B1	10/2003	Goldenberg et al.	
D430,169	S	8/2000	Scibora	6,639,584	B1	10/2003	Li	
6,097,372	A	8/2000	Suzuki	6,640,250	B1	10/2003	Chang et al.	
6,104,790	A	8/2000	Narayanaswami	6,650,975	B2	11/2003	Ruffner	
6,122,526	A	9/2000	Parulski et al.	D483,809	S	12/2003	Lim	
6,124,587	A	9/2000	Bidiville et al.	6,658,773	B2	12/2003	Rohne et al.	
6,128,006	A	10/2000	Rosenberg et al.	6,664,951	B1	12/2003	Fujii et al.	
6,131,048	A	10/2000	Sudo et al.	6,677,927	B1	1/2004	Bruck et al.	
6,141,068	A	10/2000	Iijima	6,678,891	B1	1/2004	Wilcox et al.	
6,147,856	A *	11/2000	Karidis	6,686,904	B1	2/2004	Sherman et al.	
6,163,312	A	12/2000	Furuya	6,686,906	B2	2/2004	Salminen et al.	
6,166,721	A	12/2000	Kuroiwa et al.	6,703,550	B2	3/2004	Chu	
6,179,496	B1	1/2001	Chou	6,724,817	B1	4/2004	Simpson et al.	
6,181,322	B1	1/2001	Nanavati	6,727,889	B2	4/2004	Shaw	
D437,860	S	2/2001	Suzuki et al.	D489,731	S	5/2004	Huang	
6,188,391	B1 *	2/2001	Seely et al.	6,738,045	B2	5/2004	Hinckley et al.	
6,188,393	B1	2/2001	Shu	6,750,803	B2	6/2004	Yates et al.	
6,191,774	B1	2/2001	Schena et al.	6,781,576	B2	8/2004	Tamura	
6,198,054	B1	3/2001	Janniere	6,784,384	B2	8/2004	Park et al.	
6,198,473	B1	3/2001	Armstrong	6,788,288	B2	9/2004	Ano	
6,211,861	B1	4/2001	Rosenberg et al.	6,791,533	B2	9/2004	Su	
6,219,038	B1	4/2001	Cho	6,795,057	B2	9/2004	Gordon	
6,222,528	B1 *	4/2001	Gerpheide et al.	D497,618	S	10/2004	Andre et al.	
D442,592	S	5/2001	Ledbetter et al.	6,810,271	B1	10/2004	Wood et al.	
6,225,976	B1	5/2001	Yates et al.	6,822,640	B2	11/2004	Derocher	
6,225,980	B1	5/2001	Weiss et al.	6,834,975	B2	12/2004	Chu-Chia et al.	
6,226,534	B1	5/2001	Aizawa	6,844,872	B1	1/2005	Farag et al.	
6,227,966	B1	5/2001	Yokoi	6,855,899	B2	2/2005	Sotome	
D443,616	S	6/2001	Fisher et al.	6,865,718	B2	3/2005	Levi Montalcini	
6,243,078	B1	6/2001	Rosenberg	6,886,842	B2	5/2005	Vey et al.	
6,243,080	B1	6/2001	Molne	6,894,916	B2	5/2005	Reohr et al.	
6,243,646	B1	6/2001	Ozaki et al.	D506,476	S	6/2005	Andre et al.	
6,248,017	B1	6/2001	Roach	6,922,189	B2	7/2005	Fujiyoshi	
6,254,477	B1	7/2001	Sasaki et al.	6,930,494	B2	8/2005	Tesdahl et al.	
6,256,011	B1	7/2001	Culver	6,958,614	B2	10/2005	Morimoto	
6,259,491	B1	7/2001	Ekedahl et al.	6,977,808	B2	12/2005	Lam et al.	
6,262,717	B1	7/2001	Donohue et al.	6,978,127	B1	12/2005	Bulthuis et al.	
6,262,785	B1	7/2001	Kim	6,985,137	B2	1/2006	Kaikuranta	
6,266,050	B1	7/2001	Oh et al.	7,006,077	B1	2/2006	Uusimäki	
6,285,211	B1	9/2001	Sample et al.	7,019,225	B2	3/2006	Matsumoto et al.	
D448,810	S	10/2001	Goto	7,046,230	B2	5/2006	Zadesky et al.	
6,297,795	B1	10/2001	Kato et al.	7,050,292	B2	5/2006	Shimura et al.	
6,297,811	B1 *	10/2001	Kent et al.	7,069,044	B2	6/2006	Okada et al.	
6,300,946	B1	10/2001	Lincke et al.	7,078,633	B2	7/2006	Ihalainen	
6,307,539	B2	10/2001	Suzuki	7,084,856	B2	8/2006	Huppi	
D450,713	S	11/2001	Masamitsu et al.	7,113,196	B2	9/2006	Kerr	
6,314,483	B1	11/2001	Goto et al.	7,113,520	B1	9/2006	Meenan	
6,321,441	B1	11/2001	Davidson et al.	7,117,136	B1	10/2006	Rosedale	
6,323,845	B1	11/2001	Robbins	7,119,792	B1	10/2006	Andre et al.	
D452,250	S	12/2001	Chan	7,215,319	B2	5/2007	Kamijo et al.	
6,340,800	B1	1/2002	Zhai et al.	7,233,318	B1	6/2007	Farag et al.	
D454,568	S	3/2002	Andre et al.	7,236,154	B1	6/2007	Kerr et al.	
6,357,887	B1	3/2002	Novak	7,236,159	B1	6/2007	Siversson	
D455,793	S	4/2002	Lin	7,253,643	B1	8/2007	Seguine	
6,373,265	B1	4/2002	Morimoto et al.	7,279,647	B2	10/2007	Philipp	
6,373,470	B1	4/2002	Andre et al.	7,288,732	B2	10/2007	Hashida	
6,377,530	B1	4/2002	Burrows	7,297,883	B2	11/2007	Rochon et al.	
6,396,523	B1	5/2002	Segal et al.	7,310,089	B2 *	12/2007	Baker et al.	345/173
6,424,338	B1	7/2002	Anderson	7,312,785	B2	12/2007	Tsuk et al.	
6,429,846	B2	8/2002	Rosenberg et al.	7,321,103	B2	1/2008	Nakanishi et al.	
6,429,852	B1	8/2002	Adams et al.	7,333,092	B2	2/2008	Zadesky et al.	
				7,348,898	B2	3/2008	Ono	
				7,382,139	B2	6/2008	Mackey	
				7,394,038	B2	7/2008	Chang	

(56)

References Cited

U.S. PATENT DOCUMENTS

7,395,081	B2 *	7/2008	Bonnelykke Kristensen et al. 455/550.1
7,397,467	B2	7/2008	Park et al.
7,439,963	B2	10/2008	Geaghan et al.
7,466,307	B2 *	12/2008	Trent et al. 345/173
7,479,949	B2	1/2009	Jobs et al.
7,486,323	B2	2/2009	Lee et al.
7,502,016	B2	3/2009	Trent, Jr. et al.
7,503,193	B2	3/2009	Schoene et al.
7,593,782	B2	9/2009	Jobs et al.
7,645,955	B2	1/2010	Huang et al.
7,671,837	B2	3/2010	Forsblad et al.
7,708,051	B2	5/2010	Katsumi et al.
7,772,507	B2	8/2010	Orr et al.
2001/0011991	A1	8/2001	Wang et al.
2001/0011993	A1	8/2001	Saarinén
2001/0033270	A1	10/2001	Osawa et al.
2001/0043545	A1	11/2001	Aratani
2001/0050673	A1	12/2001	Davenport
2001/0051046	A1	12/2001	Watanabe et al.
2002/0000978	A1	1/2002	Gerpheide
2002/0011993	A1	1/2002	Lui et al.
2002/0027547	A1	3/2002	Kamijo et al.
2002/0030665	A1	3/2002	Ano
2002/0033848	A1	3/2002	Sciammarella et al.
2002/0039493	A1	4/2002	Tanaka
2002/0045960	A1	4/2002	Phillips et al.
2002/0071550	A1	6/2002	Pletikosa
2002/0089545	A1	7/2002	Levi Montalcini
2002/0103796	A1	8/2002	Hartley
2002/0104957	A1	8/2002	Liess et al.
2002/0118131	A1	8/2002	Yates et al.
2002/0118169	A1	8/2002	Hinckley et al.
2002/0145594	A1	10/2002	Derocher
2002/0154090	A1	10/2002	Lin
2002/0158844	A1	10/2002	McLoone et al.
2002/0164156	A1	11/2002	Bilbrey
2002/0168947	A1	11/2002	Lemley
2002/0180701	A1	12/2002	Hayama et al.
2002/0196239	A1	12/2002	Lee
2003/0002246	A1	1/2003	Kerr
2003/0025679	A1	2/2003	Taylor et al.
2003/0028346	A1	2/2003	Sinclair et al.
2003/0043121	A1	3/2003	Chen
2003/0043174	A1	3/2003	Hinckley et al.
2003/0050092	A1	3/2003	Yun
2003/0076301	A1	4/2003	Tsuk et al.
2003/0076303	A1	4/2003	Huppi
2003/0091377	A1	5/2003	Hsu et al.
2003/0095095	A1	5/2003	Pihlaja
2003/0095096	A1	5/2003	Robbin et al.
2003/0098851	A1	5/2003	Brink
2003/0103043	A1 *	6/2003	Mulligan et al. 345/174
2003/0122792	A1	7/2003	Yamamoto et al.
2003/0135292	A1	7/2003	Husgafvel et al.
2003/0142081	A1	7/2003	Iizuka et al.
2003/0184517	A1	10/2003	Senzui et al.
2003/0197740	A1	10/2003	Reponen
2003/0206202	A1	11/2003	Moriya
2003/0210537	A1	11/2003	Engelmann
2003/0222660	A1	12/2003	Morimoto
2003/0224831	A1	12/2003	Engstrom et al.
2004/0027341	A1	2/2004	Derocher
2004/0074756	A1	4/2004	Kawakami et al.
2004/0080682	A1	4/2004	Dalton
2004/0109357	A1 *	6/2004	Cernea et al. 365/185.21
2004/0150619	A1	8/2004	Baudisch et al.
2004/0156192	A1	8/2004	Kerr et al.
2004/0178997	A1 *	9/2004	Gillespie et al. 345/173
2004/0200699	A1	10/2004	Matsumoto et al.
2004/0215986	A1	10/2004	Shakkarwar
2004/0224638	A1	11/2004	Fadell et al.
2004/0239622	A1	12/2004	Proctor et al.
2004/0252109	A1	12/2004	Trent, Jr. et al.
2004/0252867	A1	12/2004	Lan et al.
2004/0253989	A1	12/2004	Tupler et al.
2004/0263388	A1	12/2004	Krumm et al.
2004/0267874	A1	12/2004	Westberg et al.
2005/0012644	A1 *	1/2005	Hurst et al. 341/33
2005/0017957	A1	1/2005	Yi
2005/0024341	A1	2/2005	Gillespie et al.
2005/0030048	A1	2/2005	Bolender
2005/0052425	A1	3/2005	Zadesky et al.
2005/0052426	A1	3/2005	Hagermoser et al.
2005/0052429	A1	3/2005	Philipp
2005/0068304	A1	3/2005	Lewis et al.
2005/0083299	A1	4/2005	Nagasaka
2005/0083307	A1	4/2005	Aufderheide
2005/0090288	A1	4/2005	Stohr et al.
2005/0104867	A1 *	5/2005	Westerman et al. 345/173
2005/0110768	A1	5/2005	Marriott et al.
2005/0129199	A1	6/2005	Abe
2005/0139460	A1	6/2005	Hosaka
2005/0140657	A1	6/2005	Park et al.
2005/0143124	A1	6/2005	Kennedy et al.
2005/0156881	A1	7/2005	Trent et al.
2005/0162402	A1	7/2005	Watanachote
2005/0204309	A1	9/2005	Szeto
2005/0237308	A1	10/2005	Autio et al.
2006/0007171	A1	1/2006	Burdi et al.
2006/0026521	A1	2/2006	Hotelling et al.
2006/0032680	A1 *	2/2006	Elias et al. 178/18.06
2006/0038791	A1	2/2006	Mackey
2006/0087829	A1	4/2006	Manico et al.
2006/0095848	A1	5/2006	Naik
2006/0097991	A1	5/2006	Hotelling et al.
2006/0131156	A1	6/2006	Voelckers
2006/0143574	A1	6/2006	Ito et al.
2006/0174568	A1	8/2006	Kinoshita et al.
2006/0181517	A1	8/2006	Zadesky et al.
2006/0197750	A1 *	9/2006	Kerr et al. 345/173
2006/0232557	A1	10/2006	Fallot-Burghardt
2006/0236262	A1	10/2006	Bathiche et al.
2006/0250377	A1	11/2006	Zadesky et al.
2006/0274042	A1	12/2006	Krah et al.
2006/0274905	A1	12/2006	Lindahl et al.
2006/0279896	A1	12/2006	Bruwer
2006/0284836	A1	12/2006	Philipp
2007/0013671	A1	1/2007	Zadesky et al.
2007/0018970	A1	1/2007	Tabasso et al.
2007/0052044	A1	3/2007	Forsblad et al.
2007/0052691	A1	3/2007	Zadesky et al.
2007/0080936	A1	4/2007	Tsuk et al.
2007/0080938	A1	4/2007	Robbin et al.
2007/0080952	A1	4/2007	Lynch et al.
2007/0083822	A1	4/2007	Robbin et al.
2007/0085841	A1	4/2007	Tsuk et al.
2007/0097086	A1	5/2007	Battles et al.
2007/0120834	A1	5/2007	Boillot
2007/0126696	A1	6/2007	Boillot
2007/0152975	A1	7/2007	Ogihara
2007/0152977	A1 *	7/2007	Ng et al. 345/173
2007/0152983	A1	7/2007	McKillop et al.
2007/0155434	A1	7/2007	Jobs et al.
2007/0157089	A1	7/2007	Van Os et al.
2007/0242057	A1	10/2007	Zadesky et al.
2007/0247421	A1	10/2007	Orsley et al.
2007/0247443	A1	10/2007	Philipp
2007/0271516	A1	11/2007	Carmichael
2007/0273671	A1	11/2007	Zadesky et al.
2007/0276525	A1	11/2007	Zadesky et al.
2007/0279394	A1	12/2007	Lampell
2007/0285404	A1	12/2007	Rimon et al.
2007/0290990	A1	12/2007	Robbin et al.
2007/0291016	A1	12/2007	Philipp
2007/0296709	A1	12/2007	GuangHai
2008/0006454	A1	1/2008	Hotelling
2008/0007533	A1	1/2008	Hotelling et al.
2008/0007539	A1	1/2008	Hotelling et al.
2008/0012837	A1	1/2008	Marruitt
2008/0018615	A1	1/2008	Zadesky et al.
2008/0018616	A1	1/2008	Lampell et al.
2008/0018617	A1	1/2008	Ng et al.
2008/0036473	A1	2/2008	Jansson

(56)	References Cited			EP	1376326	1/2004
	U.S. PATENT DOCUMENTS			EP	1 467 392	10/2004
				EP	1482401 A2	12/2004
				EP	1 496 467	1/2005
2008/0036734 A1	2/2008	Forsblad et al.		EP	1 517 228	3/2005
2008/0060925 A1	3/2008	Weber et al.		EP	1542437 A2	6/2005
2008/0069412 A1	3/2008	Champagne et al.		EP	1 589 407	10/2005
2008/0079699 A1	4/2008	Mackey		EP	1 784 058 A2	5/2007
2008/0087476 A1	4/2008	Prest		EP	1 841 188	10/2007
2008/0088582 A1	4/2008	Prest		EP	1850218	10/2007
2008/0088596 A1	4/2008	Prest		EP	1 876 711	1/2008
2008/0088597 A1	4/2008	Prest		FR	2 686 440 A1	7/1993
2008/0088600 A1	4/2008	Prest		GB	2015167	9/1979
2008/0094352 A1	4/2008	Tsuk et al.		GB	2072389	9/1981
2008/0098330 A1	4/2008	Tsuk et al.		GB	2315186	1/1998
2008/0110739 A1	5/2008	Peng et al.		GB	2333215	7/1999
2008/0111795 A1	5/2008	Bollinger		GB	2391060	1/2004
2008/0143681 A1	6/2008	XiaoPing		GB	2402105 A	12/2004
2008/0165158 A1	7/2008	Hotelling et al.		JP	55-174009	6/1982
2008/0196945 A1	8/2008	Konstas		JP	57-95722	6/1982
2008/0202824 A1	8/2008	Philipp et al.		JP	61-117619	6/1986
2008/0209442 A1	8/2008	Setlur et al.		JP	61-124009	6/1986
2008/0264767 A1	10/2008	Chen et al.		JP	61-164547	1/1988
2008/0280651 A1	11/2008	Duarte		JP	63-106826	5/1988
2008/0284742 A1 *	11/2008	Prest et al. 345/173		JP	63-181022	7/1988
2008/0293274 A1	11/2008	Milan		JP	63-298518	12/1988
2009/0021267 A1	1/2009	Golovchenko et al.		JP	03-57617	6/1991
2009/0026558 A1	1/2009	Bauer et al.		JP	3-192418	8/1991
2009/0033635 A1	2/2009	Wai		JP	04-32920	2/1992
2009/0036176 A1	2/2009	Ure		JP	4-205408	7/1992
2009/0058687 A1	3/2009	Rothkopf et al.		JP	5-041135	2/1993
2009/0058801 A1	3/2009	Bull		JP	5-080938	4/1993
2009/0058802 A1	3/2009	Orsley et al.		JP	5-101741	4/1993
2009/0073130 A1	3/2009	Weber et al.		JP	05-36623	5/1993
2009/0078551 A1	3/2009	Kang		JP	5-189110	7/1993
2009/0109181 A1	4/2009	Hui et al.		JP	5-205565	8/1993
2009/0141046 A1	6/2009	Rathnam et al.		JP	5-211021	8/1993
2009/0160771 A1	6/2009	Hinckley et al.		JP	5-217464	8/1993
2009/0179854 A1	7/2009	Weber et al.		JP	05-233141	9/1993
2009/0197059 A1	8/2009	Weber et al.		JP	05-262276	10/1993
2009/0229892 A1	9/2009	Fisher et al.		JP	5-265656	10/1993
2009/0273573 A1	11/2009	Hotelling		JP	5-274956	10/1993
2010/0058251 A1	3/2010	Rottler et al.		JP	05-289811	11/1993
2010/0060568 A1	3/2010	Fisher et al.		JP	5-298955	11/1993
2010/0073319 A1	3/2010	Lyon et al.		JP	5-325723	12/1993
2010/0149127 A1	6/2010	Fisher et al.		JP	06-20570	1/1994
2014/0267163 A1	9/2014	Hotelling		JP	6-084428	3/1994
2015/0212627 A1	7/2015	Hotelling		JP	6-089636	3/1994
				JP	06-096639	4/1994
				JP	6-96639	4/1994
				JP	06-111685	4/1994
				JP	06-111695	4/1994
				JP	6-111695	4/1994
CN	1499356	5/2004		JP	6-139879	5/1994
CN	1659506	8/2005		JP	06-187078	7/1994
DE	3615742	11/1987		JP	06-208433	7/1994
DE	19722636	12/1998		JP	6-267382	9/1994
DE	10022537	11/2000		JP	06-283993	10/1994
DE	20019074 U1	2/2001		JP	6-333459	12/1994
DE	10 2004 043 663	4/2006		JP	7-107574	4/1995
EP	0178157	4/1986		JP	07-107574	4/1995
EP	0419145 A1	3/1991		JP	7-41882	7/1995
EP	0498540	8/1992		JP	07-41882	7/1995
EP	0521683 A2	1/1993		JP	7-201249	8/1995
EP	0674288 A1	9/1995		JP	07-201256	8/1995
EP	0 731 407 A1	9/1996		JP	07-253838	10/1995
EP	0 551 778 B1	1/1997		JP	07-261899	10/1995
EP	0551778 B1	1/1997		JP	7-261899	10/1995
EP	0880091	11/1998		JP	7-261922	10/1995
EP	1 026 713	8/2000		JP	07-296670	11/1995
EP	1081922 A2	3/2001		JP	7-319001	12/1995
EP	1098241 A2	5/2001		JP	08-016292	1/1996
EP	1 133 057	9/2001		JP	8-115158	5/1996
EP	1162826 A2	12/2001		JP	08-115158	5/1996
EP	1 168 396	1/2002		JP	8-203387	8/1996
EP	1205836 A2	5/2002		JP	8-293226	11/1996
EP	1 244 053	9/2002		JP	8-298045	11/1996
EP	1251455 A2	10/2002		JP	08-299541	11/1996
EP	1263193	12/2002		JP	8-316664	11/1996
EP	1347481	9/2003				

FOREIGN PATENT DOCUMENTS

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP	09-044289	2/1997
JP	09-069023	3/1997
JP	09-128148	5/1997
JP	9-134248	5/1997
JP	9-218747	8/1997
JP	9-230993	9/1997
JP	09-230993	9/1997
JP	9-231858	9/1997
JP	09-233161	9/1997
JP	9-251347	9/1997
JP	9-258895	10/1997
JP	9-288926	11/1997
JP	9-512979	12/1997
JP	10-63467	3/1998
JP	10-74127	3/1998
JP	10-074429	3/1998
JP	10-198507	7/1998
JP	10-227878	8/1998
JP	10-240693	9/1998
JP	10-320322	12/1998
JP	10-326149	12/1998
JP	11-24834	1/1999
JP	11-184607	7/1999
JP	11-194863	7/1999
JP	11-194872	7/1999
JP	11-194882	7/1999
JP	11-194883	7/1999
JP	11-194891	7/1999
JP	11-195353	7/1999
JP	11-203045	7/1999
JP	A 100-12010	7/1999
JP	A 100-12025	7/1999
JP	A 100-12026	7/1999
JP	A 100-12027	7/1999
JP	A 100-12028	7/1999
JP	A 100-12029	7/1999
JP	11-212725	8/1999
JP	11-272378	10/1999
JP	A 100-89535	10/1999
JP	11-338628	12/1999
JP	2000-200147	7/2000
JP	2000-215549	8/2000
JP	2000-267786	9/2000
JP	2000-267797	9/2000
JP	2000-353045	12/2000
JP	2001-11769	1/2001
JP	2001-22508	1/2001
JP	2001-184158	7/2001
JP	3085481	2/2002
JP	2002-215311	8/2002
JP	2003-015796	1/2003
JP	2003-060754	2/2003
JP	2003-099198	4/2003
JP	2003-150303	5/2003
JP	2003-517674	5/2003
JP	2003-280799	10/2003
JP	2003-280807	10/2003
JP	2004-362097	12/2004
JP	A 2005-99635	9/2005
JP	A 2005-133824	10/2005
JP	A 2005-134953	10/2005
JP	A 2005-235579	1/2006
JP	A 2005-358970	7/2006
JP	3852854	9/2006
JP	3852854	12/2006
JP	A 2005-312433	5/2007
KR	1998-71394	10/1998
KR	1999-50198	7/1999
KR	2000-08579	2/2000
KR	2001-0052016	6/2001
KR	2001-108361	12/2001
KR	2002-65059	8/2002
KR	10-2006-0021678	3/2006
TW	431607	4/2001
TW	00470193	12/2001

TW	547716	8/2003
TW	1220491	8/2004
WO	WO-94/17494	8/1994
WO	WO 95/00897 A1	1/1995
WO	WO-96/27968	9/1996
WO	WO-98/14863	4/1998
WO	WO-99/49443	9/1999
WO	WO-00/79772	12/2000
WO	WO-01/02949	1/2001
WO	WO-01/44912	6/2001
WO	WO-02/08881	1/2002
WO	WO-03/044645 A1	5/2003
WO	WO 03/044956	5/2003
WO	WO-03/025960	9/2003
WO	WO 03/088176	10/2003
WO	WO 03/090008	10/2003
WO	WO-2004/001573	12/2003
WO	WO 2004/040606	5/2004
WO	WO-2004/091956	10/2004
WO	WO-2005/055620 A2	6/2005
WO	WO 2005/076117	8/2005
WO	WO-2005/114369	12/2005
WO	WO-2005/124526 A2	12/2005
WO	WO-2006/020305	2/2006
WO	WO-2006/021211 A2	3/2006
WO	WO 2006/037545	4/2006
WO	WO 2006/104745	10/2006
WO	WO-2006/135127	12/2006
WO	WO 2007/025858	3/2007
WO	WO-2007/078477	7/2007
WO	WO-2007/084467	7/2007
WO	WO-2007/089766	8/2007
WO	WO-2008/007372	1/2008
WO	WO-2008/045414	4/2008
WO	WO-2008/045833	4/2008

OTHER PUBLICATIONS

Robbin, U.S. Appl. No. 60/346,237 entitled, "Method and System for List Scrolling," filed Oct. 22, 2001; 12 pages.

Zadesky et al., U.S. Appl. No. 60/359,551 entitled "Touchpad for Handheld Device," filed Feb. 25, 2002; 34 pages.

Grignon et al., U.S. Appl. No. 60/755,656, filed Dec. 30, 2005, entitled "Touch Pad with Feedback"; 109 pages.

Elias et al., U.S. Appl. No. 60/522,107, filed Aug. 16, 2004, entitled, "A Method for Increasing the Spatial Resolution of Touch Sensitive Devices"; 15 pages.

Hotelling, U.S. Appl. No. 60/658,777 titled "Multi-Functional Hand-held Device," filed Mar. 4, 2005; 68 pages.

Zadesky et al., U.S. Appl. No. 60/714,609 entitled "Scrolling Input Arrangements Using Capacitive Sensors on a Flexible Membrane," filed Sep. 6, 2005; 17 pages.

Lampell et al., U.S. Appl. No. 60/810,423, filed Jun. 2, 2006, entitled "Techniques for Interactive Input to Portable Electronic Devices"; 53 pages.

Prest et al., U.S. Appl. No. 60/850,662, filed Oct. 11, 2006, entitled, "Capacitive Scroll Wheel"; 21 pages.

Bollinger, U.S. Appl. No. 60/858,404, filed Nov. 13, 2006, entitled "Method of Capacitively Sensing Finger Position"; 13 pages.

Rothkopf, U.S. Appl. No. 60/935,854 titled "Compact Media Players," filed Sep. 4, 2007; 36 pages.

Rathnam et al., U.S. Appl. No. 60/992,056, filed Dec. 3, 2007, entitled, "Scroll Wheel Circuit Arrangements and Methods of Use Thereof"; 42 pages.

Rathnam et al., U.S. Appl. No. 61/017,436, filed Dec. 28, 2007, entitled, "Multi-Touch Scroll Wheel Circuit Arrangements and Processing Methods"; 58 pages.

Weber et al., U.S. Appl. No. 61/020,531, filed Jan. 11, 2008 entitled "Modifiable Clickwheel Text"; 11 pages.

Weber et al., U.S. Appl. No. 61/025,531, filed Feb. 1, 2008 entitled "Co-Extruded Materials and Methods"; 11 pages.

Fisher et al., U.S. Appl. No. 61/036,804, filed Mar. 14, 2008 entitled "Switchable Sensor Configurations"; 46 pages.

"Touchpad," Notebook PC Manual, ACER Information Co. Ltd., Feb. 16, 2005, pp. 11-12.

(56)

References Cited**OTHER PUBLICATIONS**

- "Atari VCS/2600 Peripherals" www.classicgaming.com, downloaded Feb. 28, 2007, pp. 1-15.
- "Alps Electric introduces the GlidePoint Wave Keyboard; combines a gently curved design with Alps' advanced GlidePoint Technology", *Business Wire*, (Oct. 21, 1996).
- Alps Electric Ships GlidePoint Keyboard for the Macintosh; Includes a GlidePoint Touchpad, Erase-Eaze Backspace Key and Contoured Wrist Rest, *Business Wire*, (Jul. 1, 1996).
- "APS show guide to exhibitors", *Physics Today*, 49(3) (Mar. 1996).
- "Design News literature plus", *Design News*, 51(24) (Dec. 18, 1995).
- "Manufactures", *Laser Focus World*, Buyers Guide '96, 31(12) (Dec. 1995).
- "National Design Engineering Show", *Design News*, 52(5) (Mar. 4, 1996).
- "Preview of exhibitor booths at the Philadelphia show", *Air Conditioning Heating & Refrigerator News*, 200(2) (Jan. 13, 1997).
- "Product news", *Design News*, 53(11) (Jun. 9, 1997).
- "Product news", *Design News*, 53(9) (May 5, 1997).
- Ahl, David, "Controller Updated", *Creative Computing* 9(12) (Dec. 1983).
- Baig, E.C., "Your PC Might Just Need a Mouse," *U.S. News and World Report*, 108(22) (Jun. 4, 1990).
- Bartimo, Jim, "The Portables: Traveling Quickly", *Computerworld* (Nov. 14, 1983).
- Brink et al., "Pumped-up portables", *U.S. News & World Report*, 116(21) (May 30, 1994).
- Brown et al., "Windows on Tablets as a Means of Achieving Virtual Input Devices", *Human-Computer Interaction—Interact '90* (1990).
- Buxton et al., "Issues and Techniques in Touch-Sensitive Tablet Input", *Computer Graphics*, 19(3), *Proceedings of SIGGRAPH '85* (1985).
- Chen et al., "A Study in Interactive 3-D Rotation Using 2-D Control Devices", *Computer Graphics* 22(4) (Aug. 1988).
- Evans et al., "Tablet-based Valuator that Provide One, Two, or Three Degrees of Freedom", *Computer Graphics* 15(3) (Aug. 1981).
- Jesitus, John, "Broken promises?", *Industry Week/IW*, 246(20) (Nov. 3, 1997).
- Mims, Forrest M. III, "A Few Quick Pointers; Mouses, Touch Screens, Touch Pads, Light Pads, and the Like Can Make Your System Easier to Use," *Computers and Electronics*, 22 (May 1984).
- Nass, Richard, "Touchpad input device goes digital to give portable systems a desktop "mouse-like" feel", *Electronic Design*, 44(18) (Sep. 3, 1996).
- Perenson, Melissa, "New & Improved: Touchpad Redux", *PC Magazine* (Sep. 10, 1996).
- Petersen, marty, "KoalpadTouch tablet & Micro Illustrator Software," *InfoWorld*, (Oct. 10, 1983).
- Petruzzellis, "Force-Sensing Resistors" *Electronics Now*, 64(3), (Mar. 1993).
- Soderholm, Lars D., "Sensing Systems for 'Touch and Feel,'" *Design News* (May 8, 1989).
- Sony presents "Choice Without Compromise" at IBC '97 M2 Presswire (Jul. 24, 1997).
- Spiwak, Marc, "A Great New Wireless Keyboard", *Popular Electronics*, 14(12) (Dec. 1997).
- Spiwak, Marc, "A Pair of Unusual Controllers", *Popular Electronics* 14(4) (Apr. 1997).
- Tessler, Franklin, "Point Pad", *Macworld* 12(10) (Oct. 1995).
- Tessler, Franklin, "Smart Input: How to Chose from the New Generation of Innovative Input Devices," *Macworld* 13(5) (May 1996).
- Tessler, Franklin, "Touchpads", *Macworld* 13(2) (Feb. 1996).
- "Triax Custom Controllers Due; Video Game Controllers," *HFD—The Weekly Home Furnishings Newspaper* 67(1) (Jan. 4, 1993).
- Translation of Trekstor's Defense Statement to the District Court Mannheim of May 23, 2008; 37 pages.
- "Diamond Multimedia Announces Rio PMP300 Portable MP3 Music Player," located at <http://news.harmony-central.com/Newp/1998/Rio-PMP300.html> visited on May 5, 2008. (4 pages).
- Chinese Office Action issue Dec. 29, 2006, directed to CN Application No. 200510103886.3, 25 pages.
- "About Quicktip®" www.logicad3d.com/docs/qt.html downloaded Apr. 8, 2002.
- "Apple Presents iPod: Ultra-Portable MP3 Music Player Puts 1,000 Songs in Your Pocket," retrieved from <http://www.apple.com/pr/library/2001/oct/23ipod.html> on Oct. 23, 2001.
- "Apple Unveils Optical Mouse and New Pro Keyboard," Press Release, Jul. 19, 2000.
- "Der Klangmeister," *Connect Magazine*, Aug. 1998.
- "Neuros MP3 Digital Audio Computer," www.neuroaudio.com, downloaded Apr. 9, 2003.
- "OEM Touchpad Modules" website www.glidepoint.com/sales/modules.index.shtml, downloaded Feb. 13, 2002.
- "Product Overview—ErgoCommander®," www.logicad3d.com/products/ErgoCommander.htm, downloaded Apr. 8, 2002.
- "Product Overview—SpaceMouse® Classic," www.logicad3d.com/products/Classic.htm, downloaded Apr. 8, 2002.
- "System Service and Troubleshooting Manual," www.dsplib.com/intv/Master, downloaded Dec. 11, 2002.
- "Synaptics Tough Pad Interfacing Guide," Second Edition, Mar. 25, 1998, Synaptics, Inc., San Jose, CA, pp. 1-90.
- Bang & Olufsen Telecom a/s, "BeoCom 6000 User Guide 2000," BeoCom 6000, Sales Training Brochure, date unknown.
- BeoCom 6000, Sales Training Brochure, date unknown.
- Bray, "Phosphors help switch on xenon," *Physics in Action*, pp. 1-3, Apr. 1999.
- Chapweske, Adam "PS/2 Mouse/Keyboard Protocol," 1999, <http://panda.cs.ndsu.nodak.edu/~achapwes/PICmicro/PS2/ps2.htm>.
- De Meyer, Kevin, "Crystal Optical Mouse," Feb. 14, 2002, *Heatseekerz*, Web Article 19.
- EVB Elektronik "TSOP6238 IR Receiver Modules for Infrared Remote Control Systems" dated Jan. 2004 1 page.
- Fiore, "Zen Touchpad," Cornell University, May 2000, 6 pages.
- Gadgetboy, "Point and click with the latest mice," CNET Asia Product Review, www.asia.cnet.com/reviews...are/gadgetboy/0,39001770,380235900,00.htm, downloaded Dec. 5, 2001.
- Gfroerer, "Photoluminescence in Analysis of Surfaces and Interfaces," *Encyclopedia of Analytical Chemistry*, pp. 1-23, Copyright John Wiley & Sons Ltd, Chichester, 2000.
- Letter re: Bang & Olufsen a/s by David Safran, Nixon Peabody, LLP May 21, 2004.
- Luna Technologies International, Inc., LUNA Photoluminescent Safety Products, "Photoluminescence—What is Photoluminescence?" from website at <http://www.lunaplast.com/photoluminescence.com> on Dec. 27, 2005.
- Photographs of Innovation 2000 Best of Show Award Presented at the 2000 Int'l CES Innovations 2000 Design & Engineering Showcase, 1 page.
- Ahmad, "A Usable Real-Time 3D Hand Tracker," *Proceedings of the 28th Asilomar Conference on Signals, Systems and Computers—Part 2* (of 2) vol. 2 (Oct. 1994), 5 pages.
- Sylvania, "Intellivision™ Intelligent Television Master Component Service Manual," pp. 1, 2 and 8, 1979.
- Robbin et al., U.S. Appl. No. 60/387,692 entitled "Method and Apparatus for Use of Rotational User Inputs," filed Jun. 10, 2002.
- Robbin et al., U.S. Appl. No. 60/399,806 entitled "Graphical User Interface and Methods of Use Thereof in a Multimedia Player," filed Jul. 30, 2002.
- Tsuk et al., U.S. Office Action mailed Oct. 13, 2006, directed to U.S. Appl. No. 10/256,716; 16 pages.
- Tsuk et al., U.S. Office Action mailed Aug. 3, 2006, directed to U.S. Appl. No. 10/256,716; 15 pages.
- Tsuk et al., U.S. Office Action mailed Jan. 10, 2006, directed to U.S. Appl. No. 10/256,716; 12 pages.
- Tsuk et al., U.S. Office Action mailed Jun. 24, 2005, directed to U.S. Appl. No. 10/256,716; 12 pages.
- Tsuk et al., U.S. Office Action mailed Sep. 30, 2004, directed to U.S. Appl. No. 10/256,716; 11 pages.
- Tsuk et al., U.S. Office Action mailed Jul. 7, 2009, directed to U.S. Appl. No. 11/610,190; 24 pages.
- Robbin et al., U.S. Office Action mailed Jan. 18, 2007, directed to U.S. Appl. No. 10/259,159; 18 pages.

(56)

References Cited**OTHER PUBLICATIONS**

- Robbin et al., U.S. Office Action mailed Oct. 13, 2006, directed to U.S. Appl. No. 10/259,159; 18 pages.
- Robbin et al., U.S. Office Action mailed Aug. 3, 2006, directed to U.S. Appl. No. 10/259,159; 15 pages.
- Robbin et al., U.S. Office Action mailed Jan. 11, 2006, directed to U.S. Appl. No. 10/259,159; 15 pages.
- Robbin et al., U.S. Office Action mailed Jun. 16, 2005, directed to U.S. Appl. No. 10/259,159; 16 pages.
- Robbin et al., U.S. Office Action mailed Sep. 30, 2004, directed to U.S. Appl. No. 10/259,159; 14 pages.
- Zadesky et al., U.S. Office Action mailed Jul. 9, 2008, directed to U.S. Appl. No. 10/643,256; 12 pages.
- Zadesky et al., U.S. Office Action mailed Dec. 12, 2007, directed to U.S. Appl. No. 10/643,256; 12 pages.
- Zadesky et al., U.S. Office Action mailed Jul. 13, 2007, directed to U.S. Appl. No. 10/643,256; 13 pages.
- Zadesky et al., U.S. Office Action mailed Mar. 23, 2007, directed to U.S. Appl. No. 10/643,256; 11 pages.
- Zadesky et al., U.S. Office Action mailed Oct. 27, 2006, directed to U.S. Appl. No. 10/643,256; 14 pages.
- Forsblad et al., U.S. Office Action mailed Jun. 25, 2009, directed to U.S. Appl. No. 11/355,022; 18 pages.
- Forsblad et al., U.S. Office Action mailed Jan. 26, 2009, directed to U.S. Appl. No. 11/355,022; 15 pages.
- Hotelling et al., U.S. Office Action mailed Jan. 27, 2009, directed to U.S. Appl. No. 11/882,421; 15 pages.
- Zadesky et al., U.S. Office Action mailed Aug. 6, 2009, directed to U.S. Appl. No. 11/057,050; 30 pages.
- Zadesky et al., U.S. Office Action mailed Feb. 20, 2009, directed to U.S. Appl. No. 11/057,050; 25 pages.
- Zadesky et al., U.S. Office Action mailed Dec. 24, 2008, directed to U.S. Appl. No. 11/057,050; 25 pages.
- Zadesky et al., U.S. Office Action mailed Nov. 26, 2008, directed to U.S. Appl. No. 11/057,050; 25 pages.
- Zadesky et al., U.S. Office Action mailed Aug. 19, 2008, directed to U.S. Appl. No. 11/057,050; 23 pages.
- Zadesky et al., U.S. Office Action mailed Nov. 20, 2007, directed to U.S. Appl. No. 11/057,050; 33 pages.
- Zadesky et al., U.S. Office Action mailed Mar. 5, 2009, directed to U.S. Appl. No. 11/477,469; 12 pages.
- Zadesky et al., U.S. Office Action mailed Jul. 30, 2004, directed to U.S. Appl. No. 10/188,182; 7 pages.
- Zadesky et al., U.S. Office Action mailed Sep. 21, 2005, directed to U.S. Appl. No. 10/188,182; 10 pages.
- Zadesky et al., U.S. Office Action mailed Mar. 4, 2004, directed to U.S. Appl. No. 10/188,182; 8 pages.
- Zadesky et al., U.S. Office Action mailed Oct. 4, 2007, directed to U.S. Appl. No. 11/386,238; 12 pages.
- Zadesky et al., U.S. Office Action mailed Oct. 4, 2007, directed to U.S. Appl. No. 11/806,957; 14 pages.
- Marriott et al., U.S. Office Action mailed Jan. 30, 2008, directed to U.S. Appl. No. 10/722,948; 17 pages.
- Marriott et al., U.S. Office Action mailed Jul. 13, 2007, directed to U.S. Appl. No. 10/722,948; 15 pages.
- Marriott et al., U.S. Office Action mailed Dec. 12, 2006, directed to U.S. Appl. No. 10/722,948; 14 pages.
- Marriott et al., U.S. Office Action mailed Jun. 2, 2006, directed to U.S. Appl. No. 10/722,948; 12 pages.
- Hotelling et al., U.S. Office Action mailed Jul. 24, 2009, directed to U.S. Appl. No. 11/483,008; 17 pages.
- Hotelling et al., U.S. Office Action mailed Jul. 27, 2009, directed to U.S. Appl. No. 11/882,420; 17 pages.
- Elias et al., U.S. Office Action mailed Aug. 4, 2009, directed to U.S. Appl. No. 11/203,692; 12 pages.
- Elias et al., U.S. Office Action mailed Feb. 23, 2009, directed to U.S. Appl. No. 11/203,692; 13 pages.
- Elias et al., U.S. Office Action mailed Sep. 17, 2008, directed to U.S. Appl. No. 11/203,692; 8 pages.
- Kobayashi (1996) "Design of Dynamic Soundscape: Mapping Time to Space for Audio Browsing with Simultaneous Listening," Thesis submitted to Program in Media Arts and Sciences at the Massachusetts Institute of Technology, (58 pages).
- Kobayashi et al. (1997) "Dynamic Soundscape: Mapping Time to Space for Audio Browsing," *Computer Human Interaction*: 16 pages.
- Kobayashi et al. "Development of the Touch Switches with the Click Response," Koukuu Denshi Gihou No. 17: pp. 44-48 (1994-3) (published by the Japan Aviation Electronics Industry, Ltd.); Translation of Summary.
- International Search Report and Written Opinion, dated Dec. 6, 2007, directed to related International Application No. PCT/US2007/015501.
- Tsuk et al., U.S. Office Action mailed Aug. 7, 2009, directed to U.S. Appl. No. 11/610,181; 20 pages.
- Robbin et al., U.S. Office Action mailed Aug. 10, 2009, directed to U.S. Appl. No. 11/610,376; 11 pages.
- Robbin et al., U.S. Office Action mailed Aug. 12, 2009, directed to U.S. Appl. No. 11/610,384; 20 pages.
- Lampell, U.S. Office Action mailed Sep. 15, 2009, directed to U.S. Appl. No. 11/530,807; 15 pages.
- Boling, Douglas (1993) "Programming Microsoft Windows CE.NET," p. 109.
- Interlink Electronics, VersaPad: Integration Guide, ©1998 (VersaPad), pp. 1-35.
- Ng et al., U.S. Office Action mailed Jan. 14, 2010, directed to U.S. Appl. No. 11/394,493; 20 pages.
- Ng et al., U.S. Office Action mailed Jan. 15, 2010, directed to U.S. Appl. No. 11/882,423; 22 pages.
- Tsuk et al., U.S. Office Action mailed Dec. 31, 2009, directed to U.S. Appl. No. 11/610,190; 25 pages.
- Zadesky et al., U.S. Office Action mailed Feb. 4, 2010, directed to U.S. Appl. No. 11/477,469; 14 pages.
- Lynch et al., U.S. Office Action mailed Oct. 5, 2009, directed to U.S. Appl. No. 11/499,360; 7 pages.
- Lynch et al., U.S. Office Action mailed Jan. 27, 2010, directed to U.S. Appl. No. 11/499,360; 8 pages.
- Letter re: Bang & Olufsen a/s by David-Safran, Nixon Peabody, LLP, May 21, 2004, with BeoCom 6000 Sales Training Brochure, 7 pages.
- Kobayashi et al. (1994) "Development of the Touch Switches with the Click Response," Koukuu Denshi Gihou No. 17, pp. 44-48 (published by the Japan Aviation Electronics Industry, Ltd.).
- Photographs of Innovation 2000 Best of Show Award Presented at the 2000 Int'l CES Innovations Design & Engineering Showcase, Jan. 6, 2000, 1 page.
- SanDisk Sansa Connect User Guide, 2007; 29 pages.
- Tsuk et al., U.S. Office Action mailed Apr. 28, 2010, directed to U.S. Appl. No. 11/610,190; 29 pages.
- Zadesky et al., U.S. Office Action mailed Mar. 30, 2010, directed to U.S. Appl. No. 11/592,679; 13 pages.
- Hotelling et al., U.S. Office Action mailed Mar. 30, 2010, directed to U.S. Appl. No. 11/483,008; 20 pages.
- Elias et al., U.S. Office Action mailed Mar. 30, 2010, directed to U.S. Appl. No. 11/203,692; 15 pages.
- Ng et al., U.S. Office Action mailed Jul. 8, 2010, directed to U.S. Appl. No. 11/882,423; 19 pages.
- Tsuk et al., U.S. Office Action mailed Aug. 6, 2010, directed to U.S. Appl. No. 11/610,190; 30 pages.
- Zadesky et al., U.S. Office Action mailed Aug. 2, 2010, directed to U.S. Appl. No. 11/882,004; 9 pages.
- Marriott et al., U.S. Office Action mailed Aug. 19, 2010, directed to U.S. Appl. No. 11/882,422; 13 pages.
- Hotelling, U.S. Office Action mailed Aug. 18, 2010, directed to U.S. Appl. No. 11/882,424; 16 pages.
- Bull, U.S. Office Action mailed Jul. 9, 2010, directed to U.S. Appl. No. 11/849,801; 13 pages.
- Ng et al., U.S. Office Action mailed Jun. 22, 2010, directed to U.S. Appl. No. 11/394,493; 14 pages.
- Lampell, U.S. Office Action mailed Jun. 4, 2010, directed to U.S. Appl. No. 11/530,807; 15 pages.
- Prest et al., U.S. Office Action mailed Jun. 22, 2010, directed to U.S. Appl. No. 11/878,132; 32 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Prest et al., U.S. Office Action mailed Jun. 22, 2010, directed to U.S. Appl. No. 11/882,882; 32 pages.
 Prest et al., U.S. Office Action mailed Jun. 23, 2010, directed to U.S. Appl. No. 11/812,384; 29 pages.
 Prest et al., U.S. Office Action mailed Jun. 22, 2010, directed to U.S. Appl. No. 11/882,890; 15 pages.
 Prest et al., U.S. Office Action mailed Jun. 22, 2010, directed to U.S. Appl. No. 11/812,383; 21 pages.
 Prest et al., U.S. Office Action mailed Jun. 23, 2010, directed to U.S. Appl. No. 11/882,889; 13 pages.
 Bollinger et al., U.S. Office Action mailed Jun. 25, 2010, directed to U.S. Appl. No. 11/842,724; 22 pages.
 Elias et al., U.S. Office Action mailed Jun. 11, 2010, directed to U.S. Appl. No. 11/203,692; 17 pages.
 Weber et al., U.S. Office Action mailed Jun. 7, 2010, directed to U.S. Appl. No. 11/856,530; 15 pages.
 Tsuk et al., U.S. Office Action mailed Nov. 1, 2010, directed U.S. Appl. No. 11/959,918; 8 pages.
 Tsuk et al., U.S. Office Action mailed Oct. 26, 2010, directed to U.S. Appl. No. 11/959,942; 27 pages.
 Robbin et al., U.S. Office Action mailed Oct. 29, 2010, directed to U.S. Appl. No. 11/838,845; 8 pages.
 Ng et al., U.S. Office Action mailed Oct. 26, 2010, directed to U.S. Appl. No. 11/882,423; 18 pages.
 Zadesky et al., U.S. Office Action mailed Oct. 4, 2010, directed to U.S. Appl. No. 11/057,050; 31 pages.
 McKillop et al., U.S. Office Action mailed Sep. 16, 2010, directed to U.S. Appl. No. 11/591,752; 14 pages.
 Zadesky et al., U.S. Office Action mailed Sep. 29, 2010, directed to U.S. Appl. No. 11/882,003; 13 pages.
 Hotelling et al., U.S. Office Action mailed Oct. 27, 2010, directed to U.S. Appl. No. 11/483,008; 23 pages.
 Weber et al., U.S. Office Action mailed Oct. 13, 2010, directed to U.S. Appl. No. 12/205,795; 15 pages.
 Hotelling, U.S. Office Action mailed Apr. 29, 2011, directed to U.S. Appl. No. 11/882,424; 10 pages.
 Zadesky et al., U.S. Office Action mailed Feb. 1, 2011, directed to U.S. Appl. No. 11/882,004; 16 pages.
 Bull, U.S. Office Action mailed Feb. 4, 2011, directed to U.S. Appl. No. 11/849,801; 22 pages.
 Weber et al., U.S. Office Action mailed Jan. 7, 2011, directed to U.S. Appl. No. 11/856,530; 13 pages.
 Weber et al., U.S. Office Action mailed Jan. 7, 2011, directed to U.S. Appl. No. 12/205,795; 21 pages.
 Weber et al., U.S. Office Action mailed Feb. 17, 2011, directed to U.S. Appl. No. 12/844,502; 11 pages.

Ng et al., U.S. Office Action mailed Dec. 9, 2010, directed to U.S. Appl. No. 11/394,493; 13 pages.
 Zadesky et al., U.S. Office Action mailed Nov. 16, 2010, directed to U.S. Appl. No. 11/477,469; 13 pages.
 Lampell, U.S. Office Action mailed Dec. 3, 2010, directed to U.S. Appl. No. 11/530,807; 17 pages.
 Lampell et al., U.S. Office Action mailed Dec. 22, 2010, directed to U.S. Appl. No. 11/882,427; 16 pages.
 Elias et al., U.S. Office Action mailed Nov. 22, 2010, directed to U.S. Appl. No. 11/203,692; 6 pages.
 Tsuk et al., U.S. Office Action mailed Apr. 19, 2011, directed to U.S. Appl. No. 11/610,190; 25 pages.
 Tsuk et al., U.S. Office Action mailed Mar. 31, 2011, directed to U.S. Appl. No. 11/959,918; 9 pages.
 Robbin et al., U.S. Office Action mailed Apr. 26, 2011, directed to U.S. Appl. No. 11/838,845; 9 pages.
 Zadesky et al., U.S. Office Action mailed Mar. 31, 2011, directed to U.S. Appl. No. 11/882,005; 7 pages.
 Bollinger et al., U.S. Office Action mailed Mar. 21, 2011, directed to U.S. Appl. No. 11/842,724; 22 pages.
 McKillop et al., U.S. Office Action mailed Mar. 24, 2011, directed to U.S. Appl. No. 11/591,752; 11 pages.
 Zadesky et al., U.S. Office Action mailed Mar. 16, 2011, directed to U.S. Appl. No. 11/882,003; 12 pages.
 Rathnam et al., U.S. Office Action mailed Mar. 24, 2011, directed to U.S. Appl. No. 12/205,757; 14 pages.
 Hotelling, U.S. Office Action mailed Jun. 10, 2015, directed to U.S. Appl. No. 14/678,597; 11 pages.
 Hotelling, U.S. Office Action mailed Dec. 15, 2011, directed to U.S. Appl. No. 11/882,424; 16 pages.
 Hotelling, U.S. Office Action mailed Jun. 21, 2012, directed to U.S. Appl. No. 11/882,424; 15 pages.
 Hotelling, U.S. Office Action mailed Sep. 28, 2012, directed to U.S. Appl. No. 11/882,424; 11 pages.
 Hotelling, U.S. Office Action mailed Jul. 2, 2014, directed to U.S. Appl. No. 14/293,843; 5 pages.
 Hotelling, U.S. Office Action mailed Mar. 13, 2015, directed to U.S. Appl. No. 14/293,843; 11 pages.
 Hotelling, U.S. Office Action mailed Oct. 11, 2012, directed to U.S. Appl. No. 12/498,119; 18 pages.
 Hotelling, U.S. Office Action mailed Nov. 29, 2012, directed to U.S. Appl. No. 12/498,119; 19 pages.
 Hotelling, U.S. Office Action mailed Sep. 23, 2013, directed to U.S. Appl. No. 12/498,119; 19 pages.
 Hotelling, U.S. Office Action mailed Sep. 14, 2015, directed to U.S. Appl. No. 14/678,597; 11 pages.

* cited by examiner

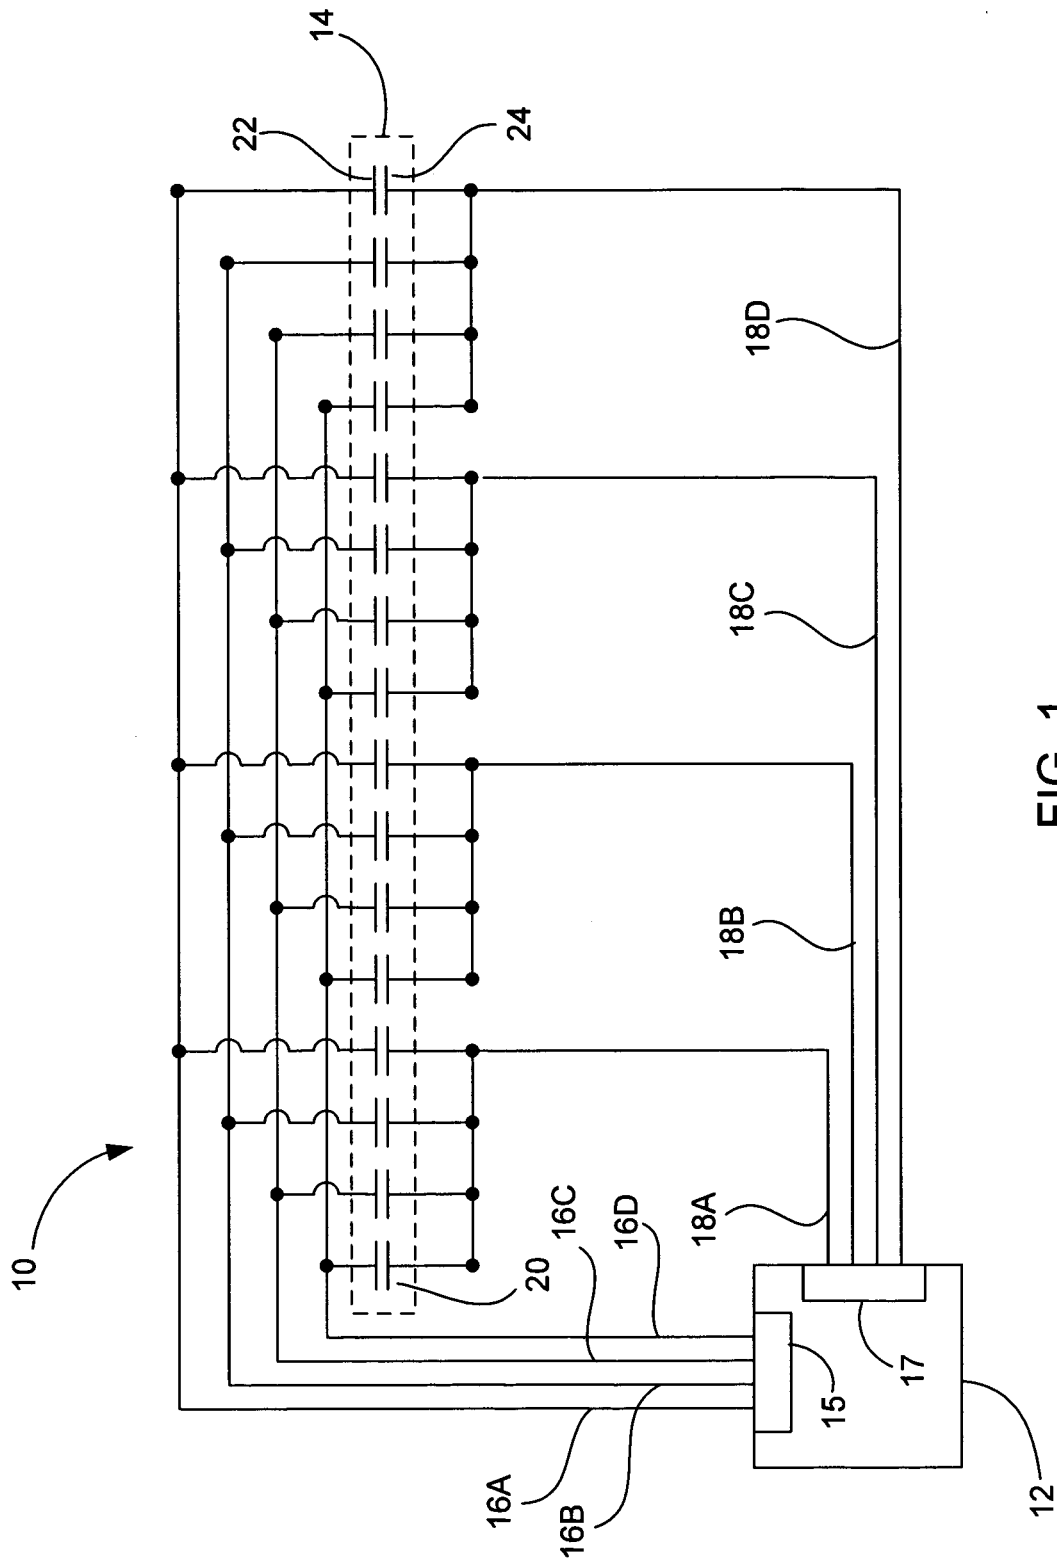


FIG. 1

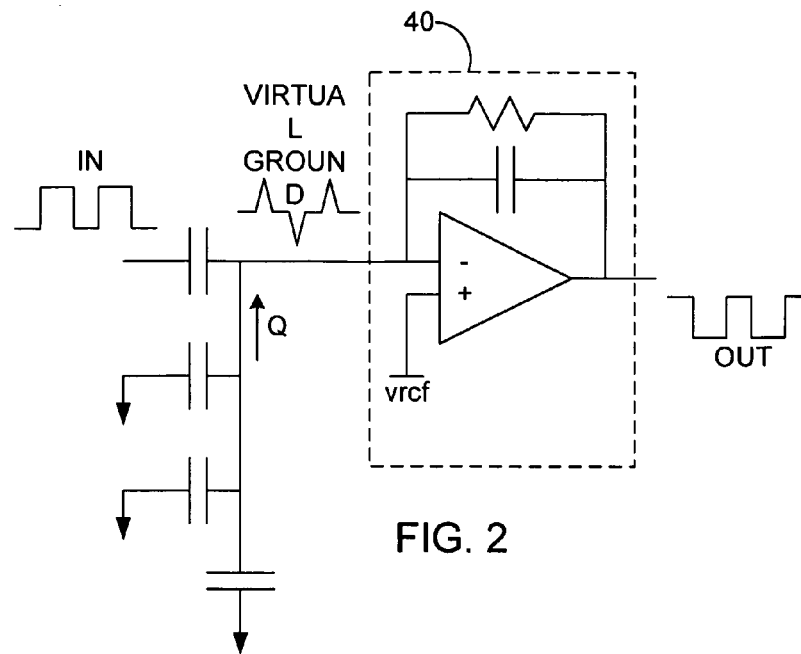


FIG. 2

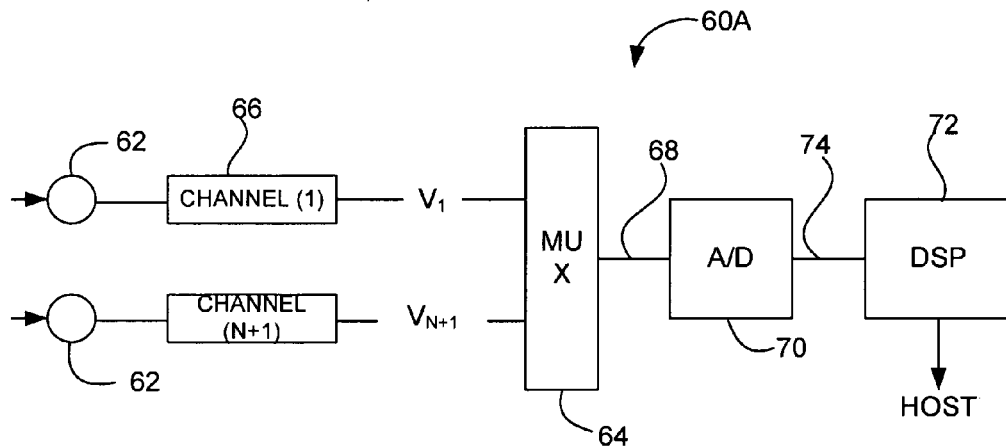


FIG. 3A

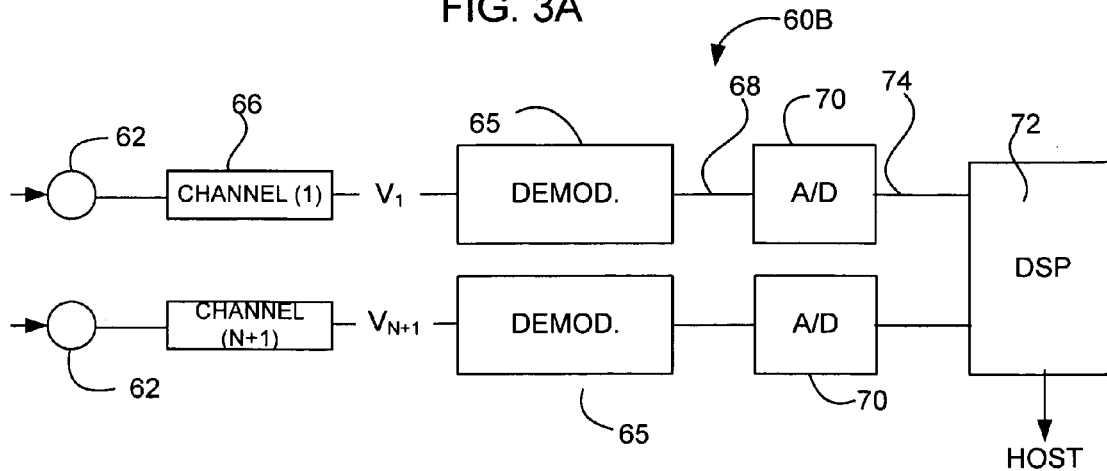


FIG. 3B

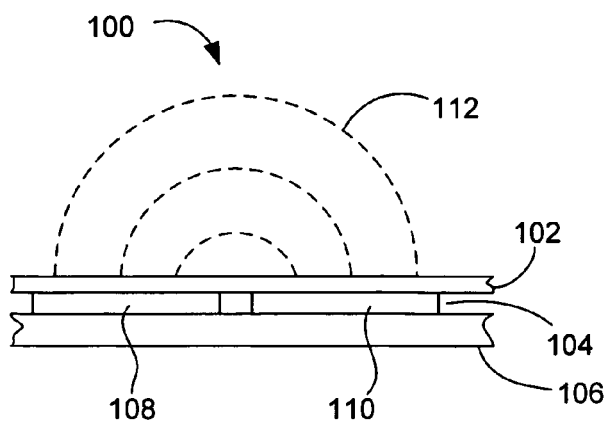


FIG. 4

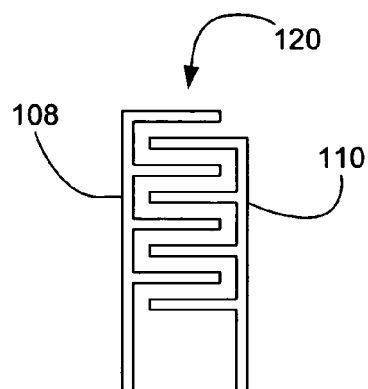


FIG. 5

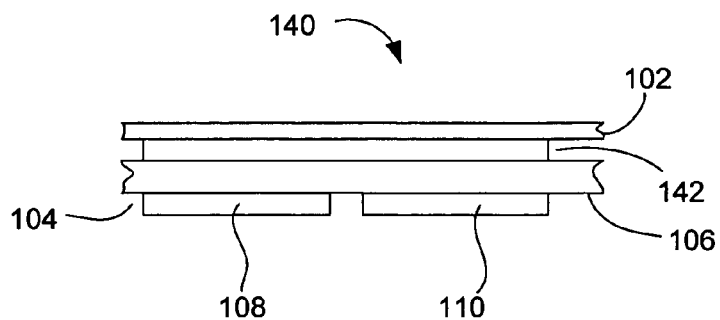


FIG. 6

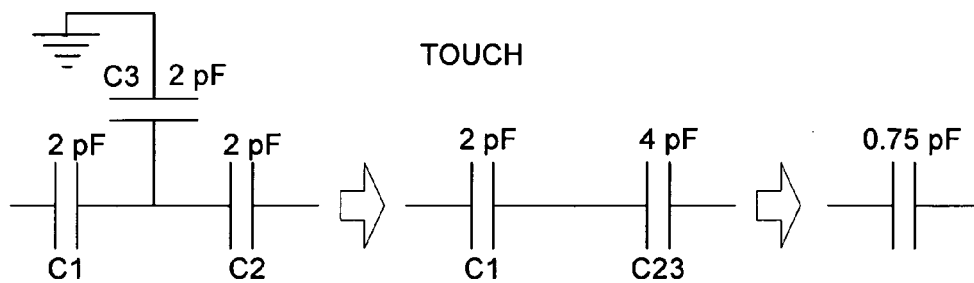


FIG. 7A

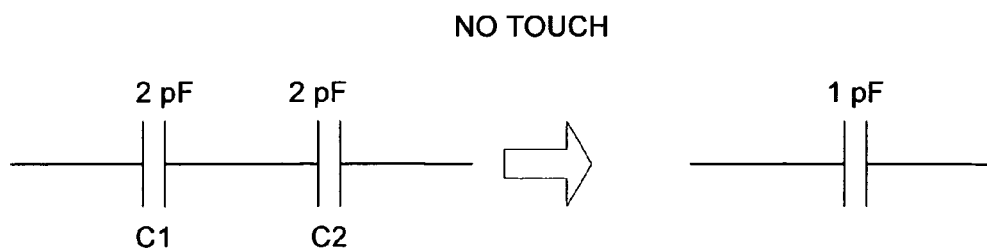


FIG. 7B

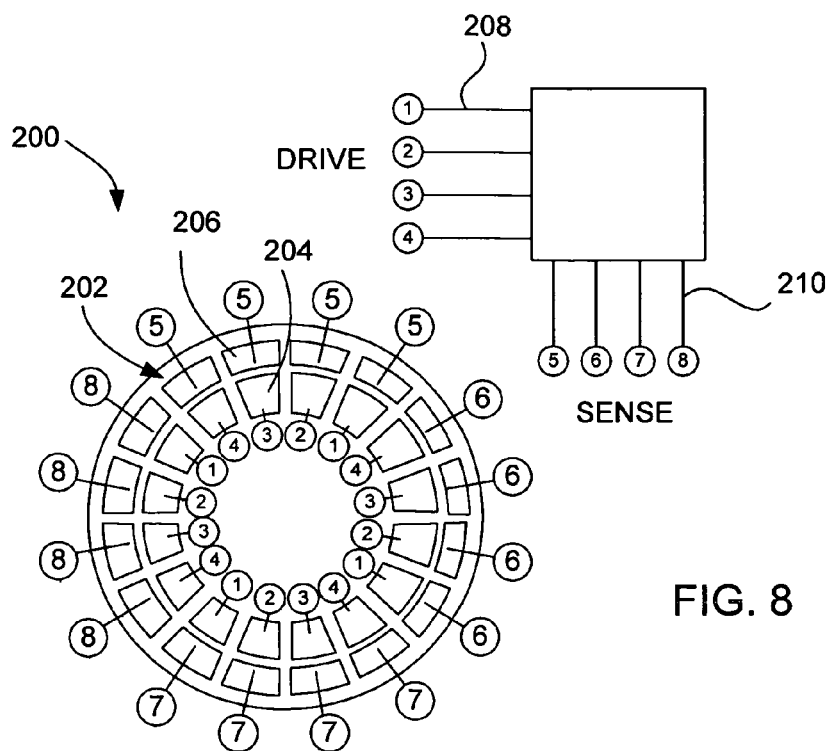


FIG. 8

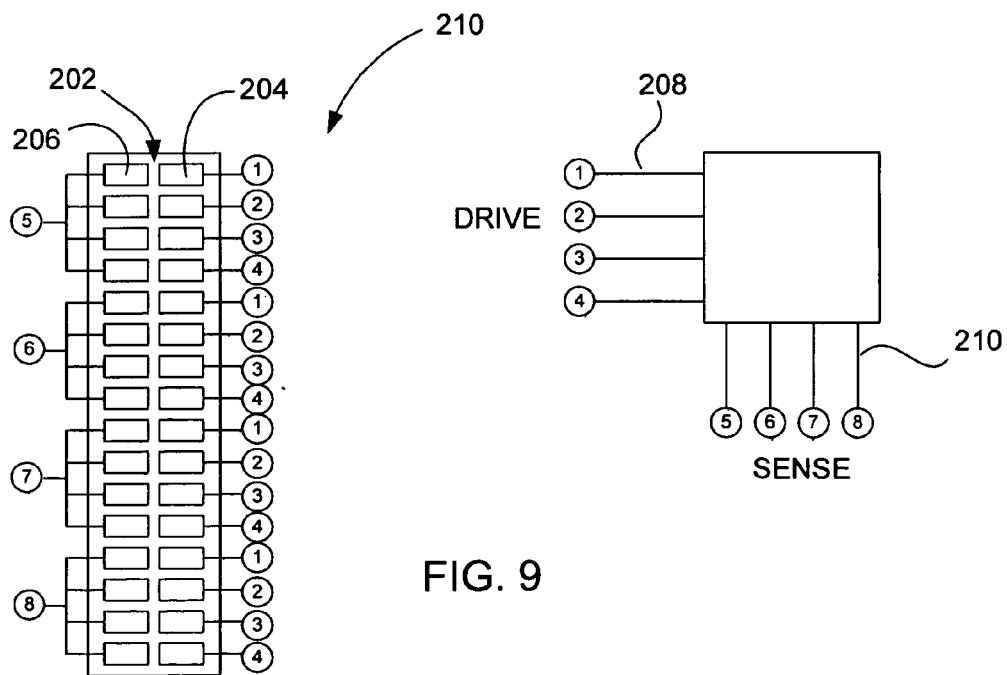


FIG. 9

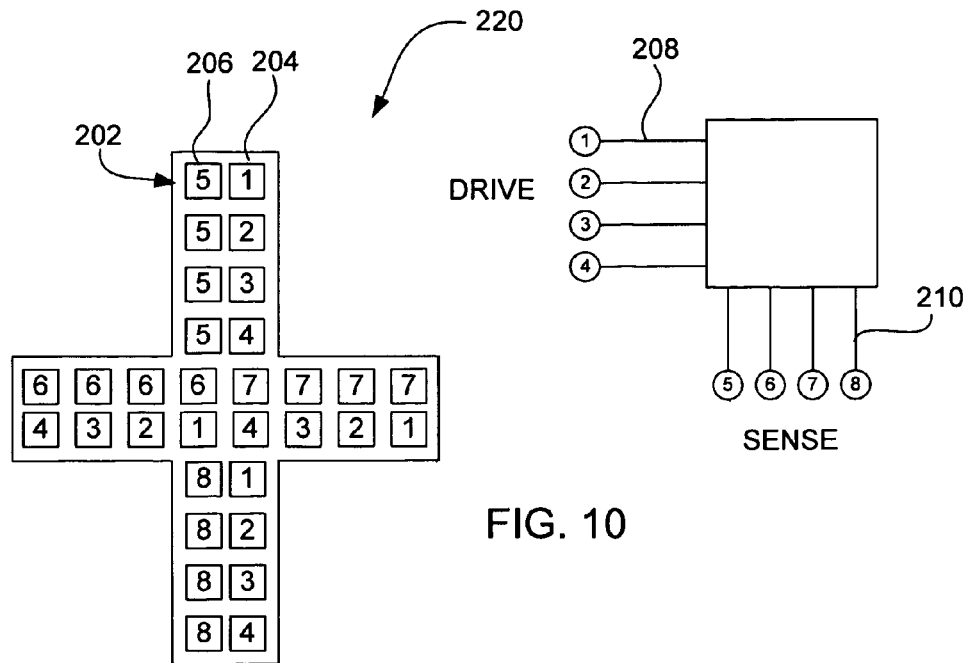


FIG. 10

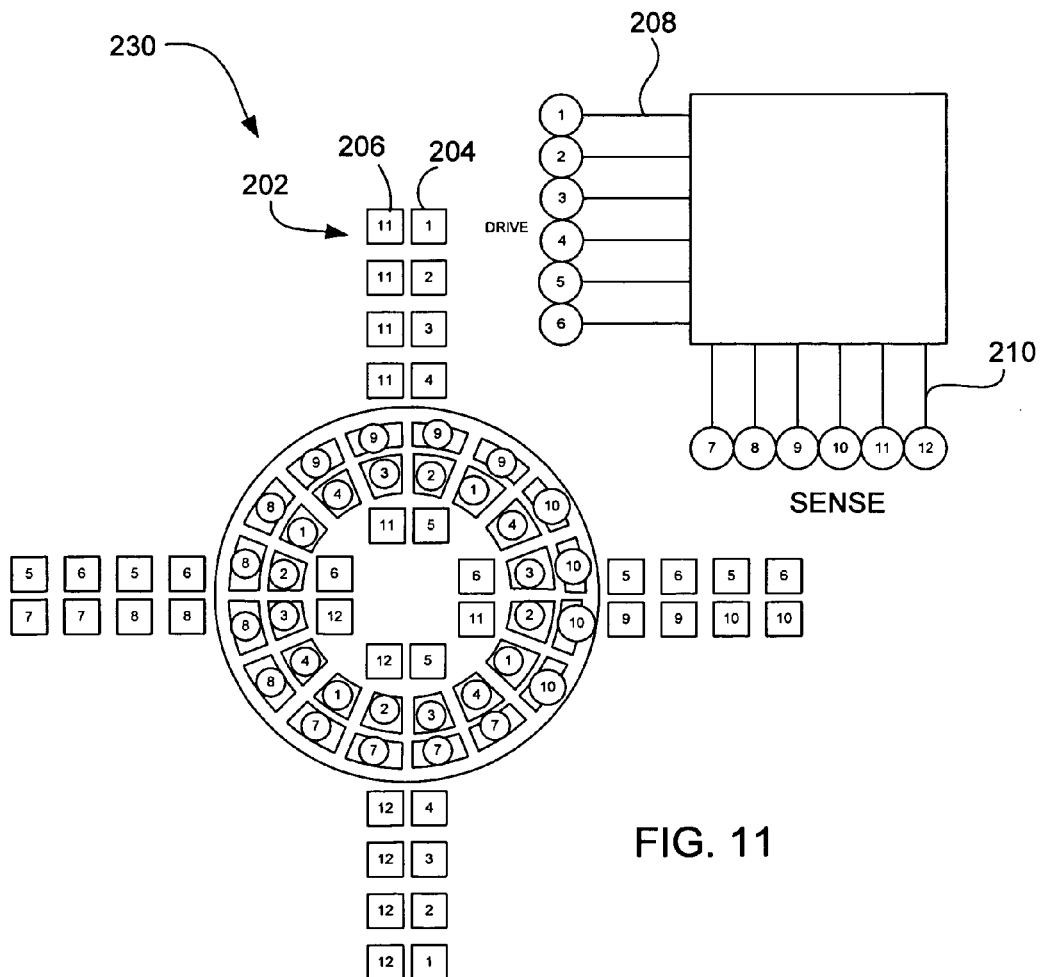


FIG. 11

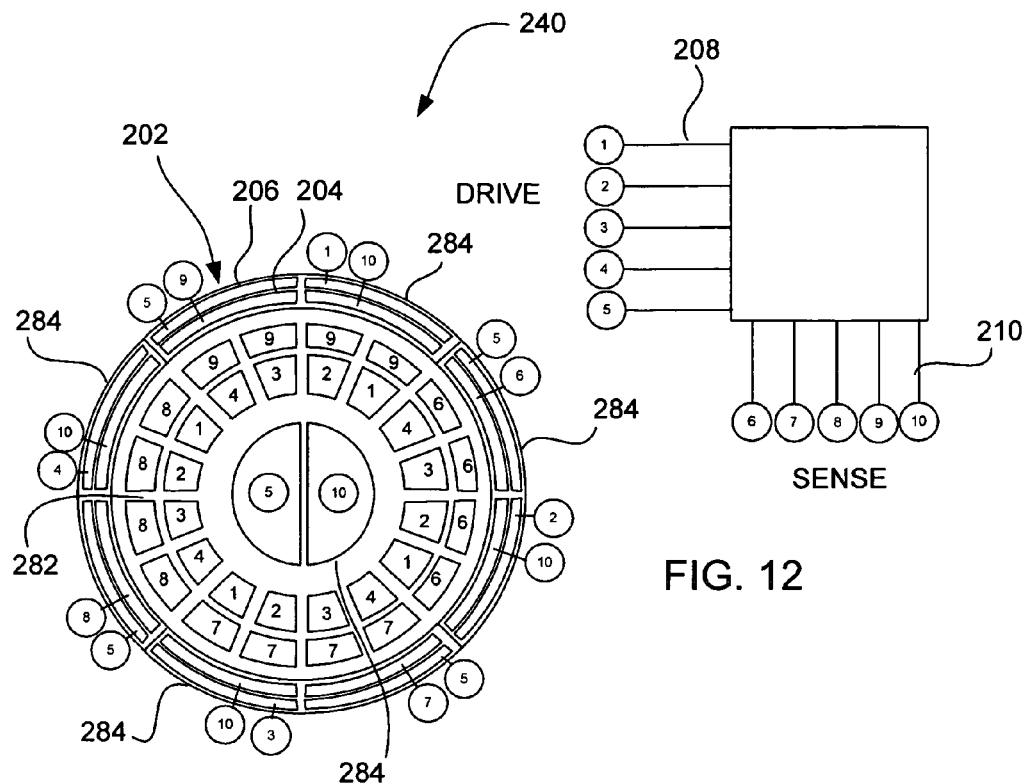


FIG. 12

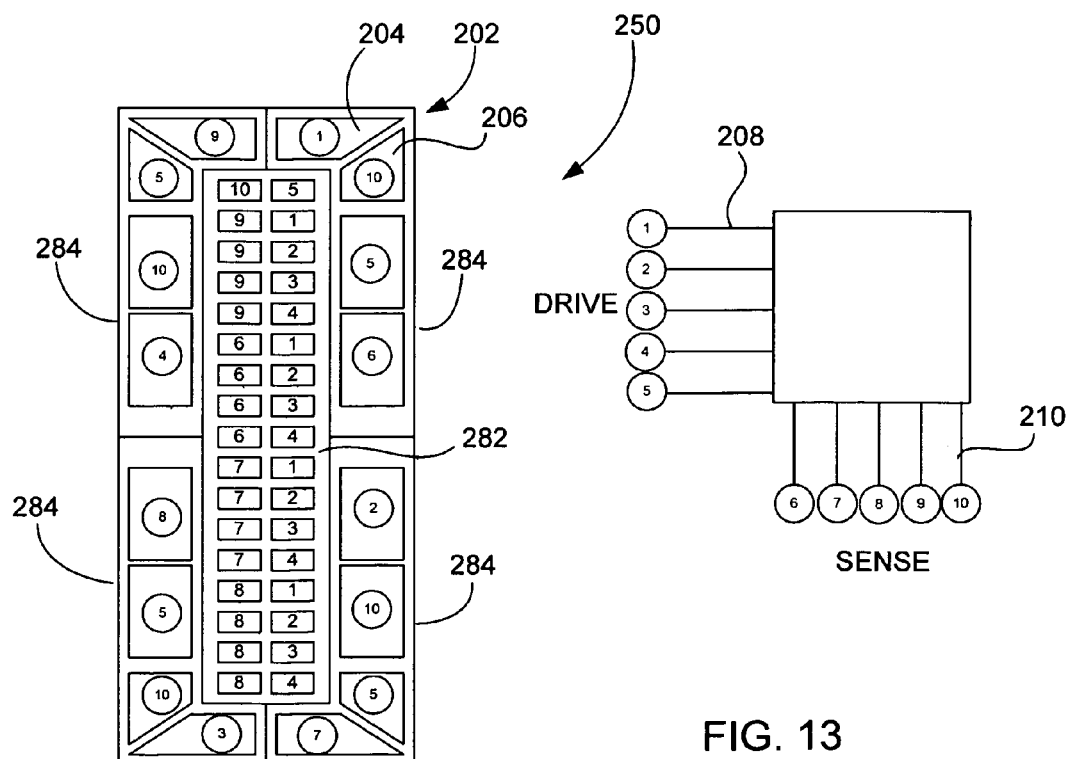
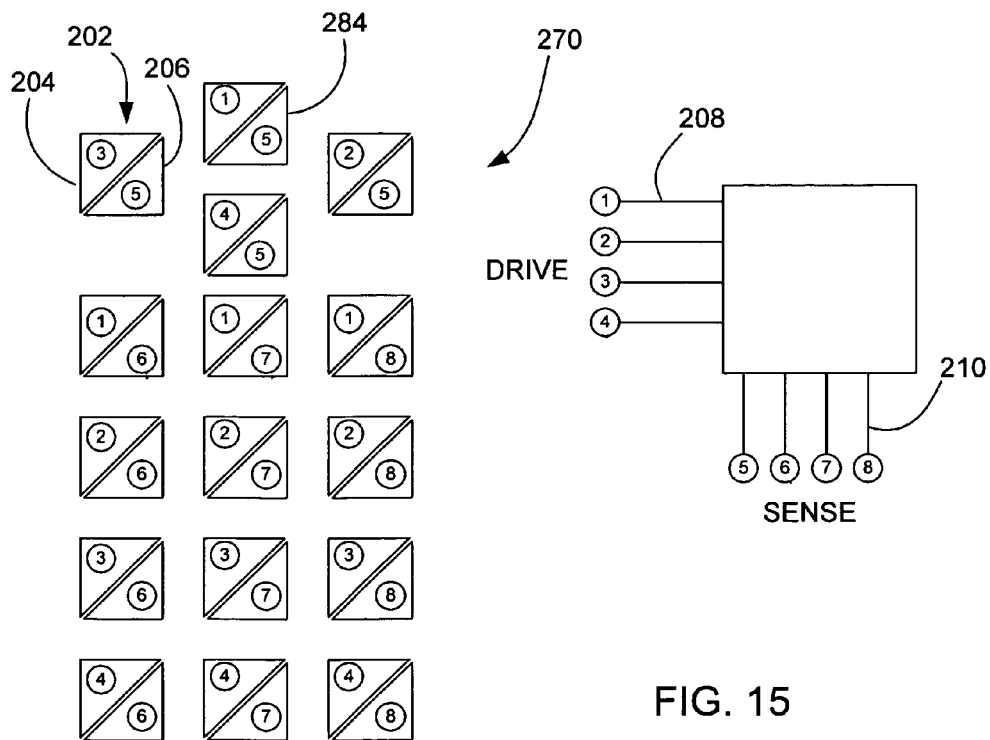
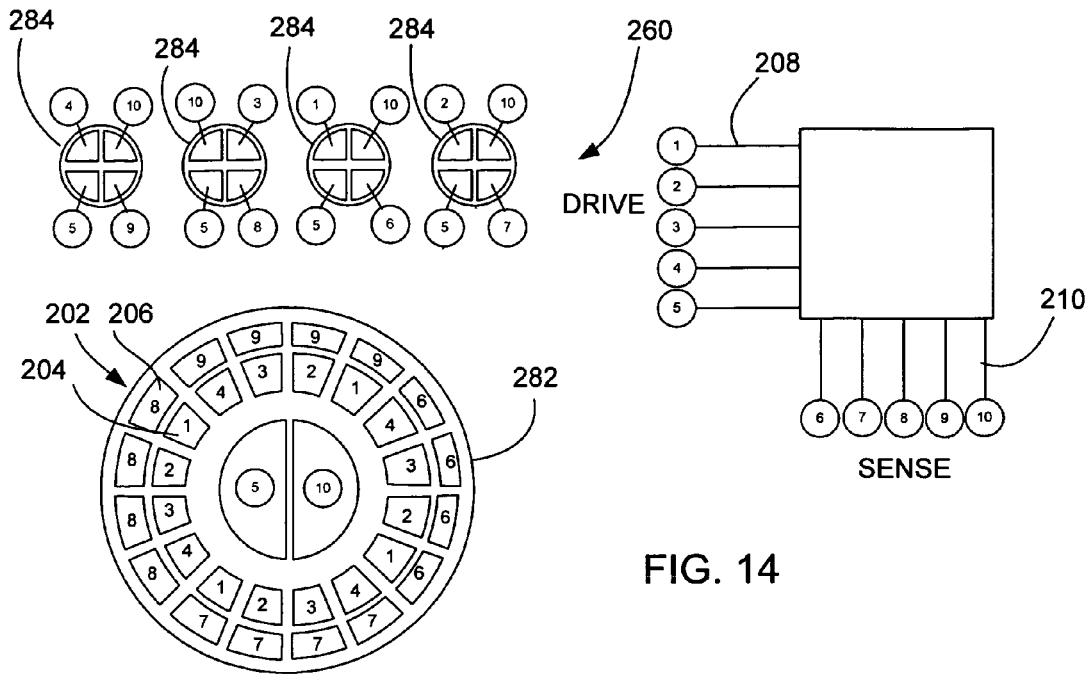


FIG. 13



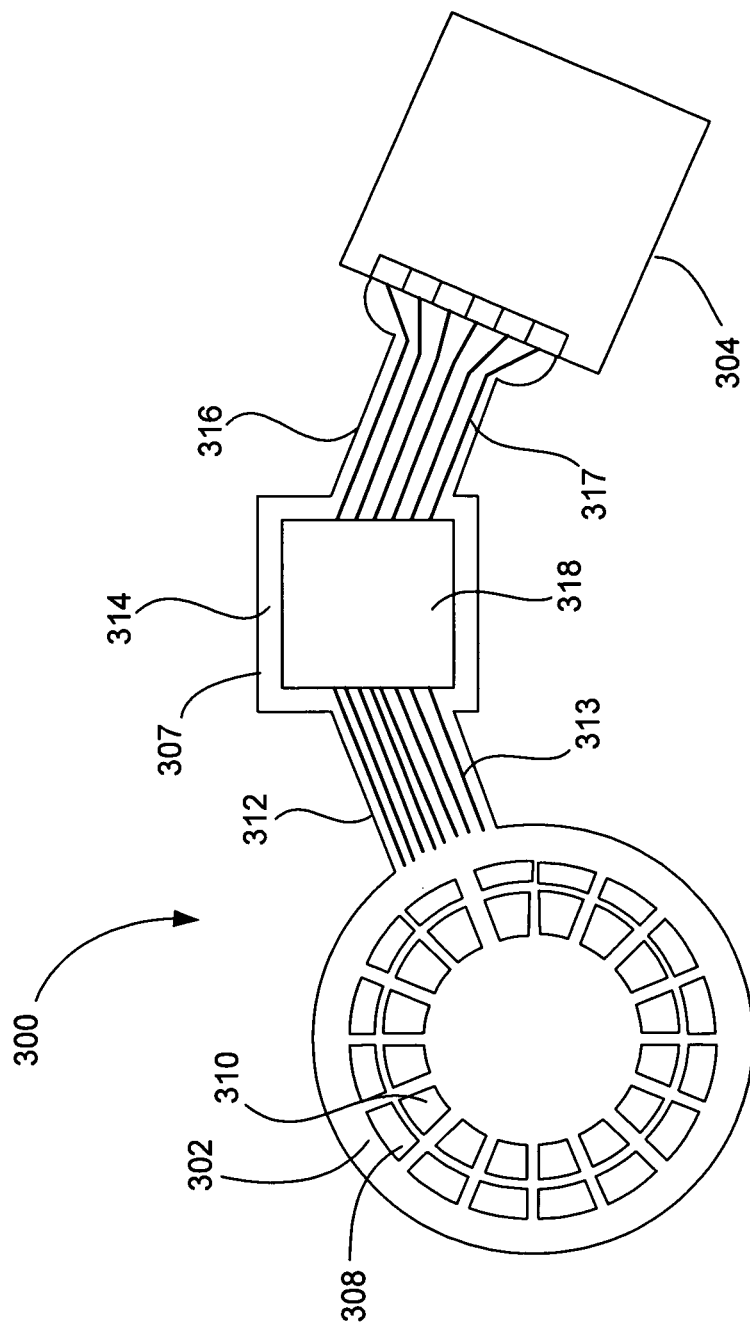


FIG. 16

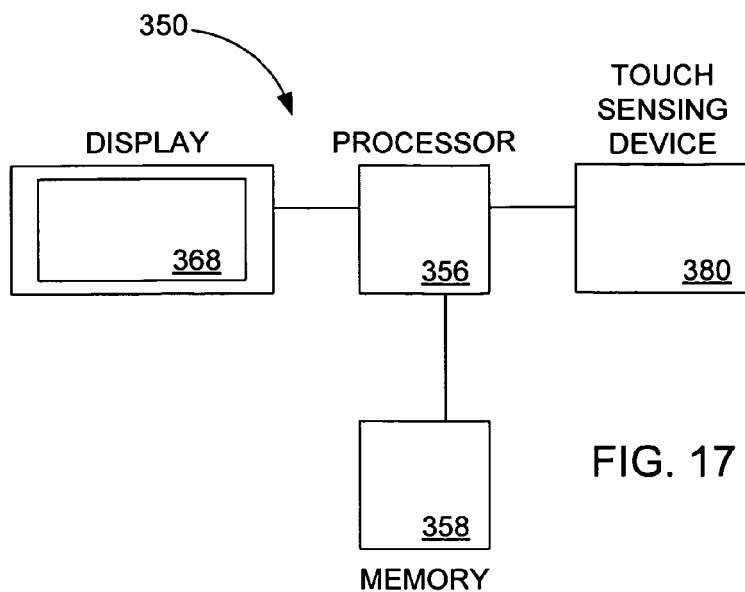


FIG. 17

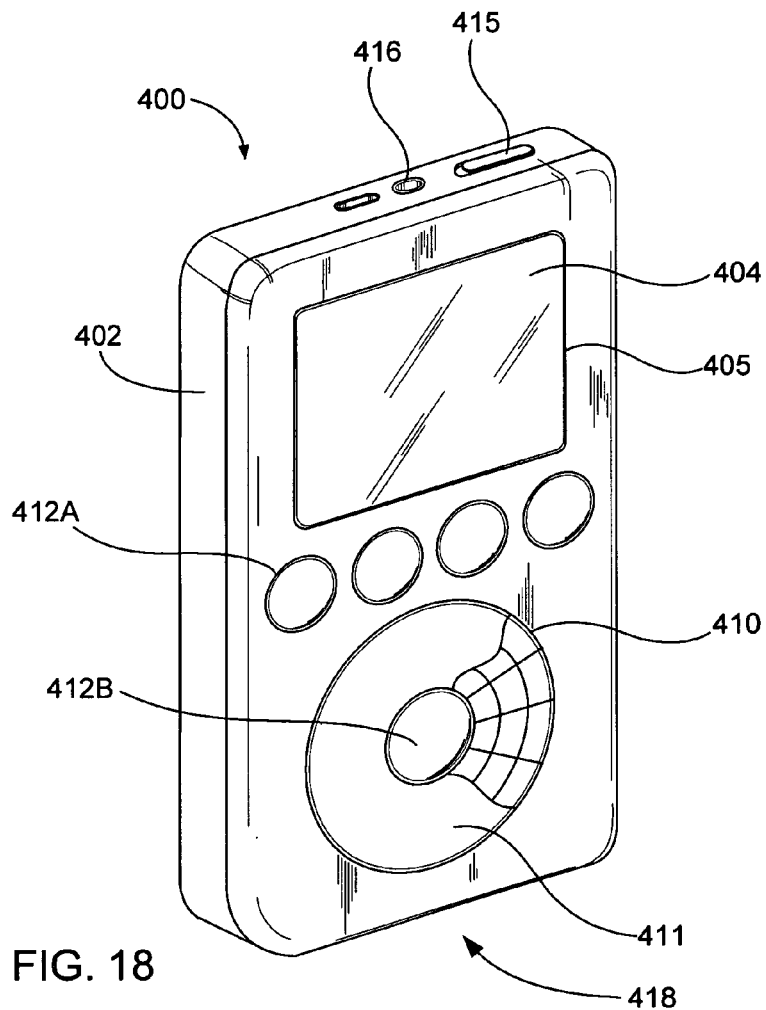


FIG. 18

1

MUTUAL CAPACITANCE TOUCH SENSING DEVICE

CROSS REFERENCE TO RELATED APPLICATIONS

This application is related to the following applications, all of which are herein incorporated by reference:

U.S. patent application Ser. No. 10/188,182, titled "TOUCH PAD FOR HANDHELD DEVICE", filed Jul. 1, 2002; U.S. patent application Ser. No. 10/722,948, titled "TOUCH PAD FOR HANDHELD DEVICE", filed Nov. 25, 2003; U.S. patent application Ser. No. 10/643,256, titled "MOVABLE TOUCH PAD WITH ADDED FUNCTIONALITY", filed Aug. 18, 2003; U.S. patent application Ser. No. 10/840,862, titled "MULTIPOINT TOUCHSCREEN", filed May 6, 2004; U.S. patent application Ser. No. 11/057,050, titled "DISPLAY ACTUATOR", filed Feb. 11, 2005; and U.S. patent application Ser. No. 11/115,539, titled "HANDHELD ELECTRONIC DEVICE WITH MULTIPLE TOUCH SENSING DEVICES".

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to touch sensing devices used in portable electronic devices. More particularly, the present invention relates to an improved mutual capacitance sensing touch device.

2. Description of the Related Art

There are many factors that determine the size of compact portable electronic devices such as laptops, PDAs, media players, cell phones, etc. In most cases, the size of the portable electronic device is limited by the size of the operational components used therein. These components include for example microprocessor chips, printed circuit boards, displays, memory chips, hard drives, batteries, interconnectivity circuitry, indicators, input mechanisms and the like. As such, there is a desired to make these operational components smaller and smaller while maintaining or increasing their power and functionality to perform operations as well as decreasing their cost. The placement of these components inside the electronic device is also a factor in determining the size of the portable electronic device. For thin devices such as cell phones, PDAs and media players, stacking operational components on top of each other is limited and therefore the operational components may be placed side by side. In some cases, the operational components may even communicate through wires or flex circuits so that they may be spaced apart from one another (e.g., not stacked).

There exist today many styles of input mechanisms for performing operations in a portable electronic device. The operations generally correspond to moving objects and making selections. By way of example, the input devices may include buttons, keys, dials, wheels, mice, trackballs, touch pads, joy sticks, touch screens and the like. Touch devices such as touch buttons, touch pads and touch screens are becoming increasingly popular in portable electronic devices because of their ease and versatility of operation, their declining price as well as their space saving ability (e.g., planarity). Touch devices allow a user to make selections and move objects by simply moving their finger (or stylus) relative to a touch sensing surface. In general, the touch device recognizes a touch and in some circumstances the characteristics of the touch and a host controller of the portable electronic device interprets the touch data and thereafter performs action based on the touch data.

2

There are several types of technologies for implementing a touch device including for example resistive, capacitive, infrared, surface acoustic wave, electromagnetic, near field imaging, etc.

Capacitive touch sensing devices have been found to work particularly well in portable electronic devices. Generally speaking, whenever two electrically conductive members come close to one another without actually touching, their electric field interact to form capacitance. In the case of a capacitive touch device, as an object such as a finger approaches the touch sensing surface, a tiny capacitance forms between the object and the sensing points in close proximity to the object. By detecting changes in capacitance at each of the sensing points and noting the position of the sensing points, the sensing circuit can recognize multiple objects and determine the location, pressure, direction speed and acceleration of the object as it is moved across the touch surface.

Although capacitive sensing devices have been found to work particularly well in portable electronic devices, improvements to form, feel and functionality are still desired. For example, improvements that help produce a better portable electronic device.

SUMMARY OF THE INVENTION

The invention relates, in one embodiment, to a touch sensing device. The touch sensing device includes a mutual capacitance sensing controller having a plurality of distinct drive lines and a plurality of distinct sense lines, a source for driving a current or voltage separately through each drive line, a mutual capacitance sensing circuit that monitors the capacitance at the sensing lines. The touch sensing device also includes a plurality of independent and spatially distinct mutual capacitance sensing nodes set up in a non two dimensional array. Each node includes a drive electrode that is spatially separated from a sense electrode. The drive electrode is coupled to one of the drive lines and the sense electrode is coupled to one of the sense lines. Each node is set up with a different combination of drive and sense line coupled thereto.

The invention relates, in another embodiment, to a touch sensing device that operates via mutual capacitance. The touch sensing device includes a mutual capacitance sensing node including a drive electrode that is spatially separated and juxtaposed next to a sense electrode. The drive electrode is coupled to a drive line and the sense electrode is coupled to a sense line of a mutual capacitance sensing circuit.

The invention relates, in another embodiment, to a mutual capacitance sensing method. The method includes separately driving a voltage or current through each drive line. The method also includes capacitively coupling current between drive electrodes that are coupled to driven drive line and corresponding sense electrodes that are coupled to sense lines. The method further includes detecting capacitance at electrode pairs through each sense line each time a drive line is driven. The method additionally includes determining which electrode pairs have been touched based on detected capacitance. Moreover, the method includes performing actions based on which electrode pairs have been touched.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

3

FIG. 1 is a circuit diagram of a mutual capacitive sensing input device, in accordance with one embodiment of the present invention.

FIG. 2 is a circuit diagram of a filter arrangement of a mutual capacitance sensing circuit, in accordance with one embodiment of the present invention.

FIG. 3A is a block diagram of a mutual capacitive sensing circuit, in accordance with one embodiment of the present invention.

FIG. 3B is a block diagram of a mutual capacitive sensing circuit, in accordance with one embodiment of the present invention.

FIG. 4 is a diagram of a mutual capacitive sensing node, in accordance with one embodiment of the present invention.

FIG. 5 is a diagram of a mutual capacitive sensing node, in accordance with one embodiment of the present invention.

FIG. 6 is a diagram of a mutual capacitive sensing node, in accordance with one embodiment of the present invention.

FIGS. 7A and 7B show the embodiment of FIG. 6 in circuit diagram form, in accordance with one embodiment of the present invention.

FIG. 8 is a diagram of a circular touch device, in accordance with one embodiment of the present invention.

FIG. 9 is a diagram of a linear touch device, in accordance with one embodiment of the present invention.

FIG. 10 is a diagram of another type of linear touch device, in accordance with one embodiment of the present invention.

FIG. 11 is a diagram of a combined touch device, in accordance with one embodiment of the present invention.

FIG. 12 is a diagram of a touch device that includes a touch region and one or more distinct buttons, in accordance with one embodiment of the present invention.

FIG. 13 is a diagram of a touch device that includes a touch region and one or more distinct buttons, in accordance with one embodiment of the present invention.

FIG. 14 is a diagram of a touch device that includes a touch region and one or more distinct buttons, in accordance with one embodiment of the present invention.

FIG. 15 is diagram of a touch device that only includes a button arrangement, in accordance with one embodiment of the present invention.

FIG. 16 is a diagram of a touch assembly, in accordance with one embodiment of the present invention.

FIG. 17 is a block diagram of an exemplary electronic device, in accordance with one embodiment of the present invention.

FIG. 18 is a perspective diagram of a media player, in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The simplicity of capacitance allows for a great deal of flexibility in design and construction of the sensing device. By way of example, the sensing device may be based on self capacitance or mutual capacitance.

In self capacitance, each of the sensing points is provided by an individually charged electrode. As an object approaches the surface of the touch device, the object capacitively couples to those electrodes in close proximity of the object thereby stealing charge away from the electrodes. The amount of charge in each of the electrodes are measured by the sensing circuit to determine the positions of objects as they touch the touch sensitive surface.

In mutual capacitance, the sensing device typically includes a two-layer grid of spatially separated wires. In the simplest case, the upper layer includes lines in rows while the lower layer includes lines in columns (orthogonal). The sens-

4

ing points are provided at the intersections of the rows and columns. During operation, the rows are charged and the charge capacitively couples to the columns at the intersection. As an object approaches the surface of the touch device, the object capacitively couples to the rows at the intersections in close proximity to the object thereby stealing charge away from the rows and therefore the columns as well. The amount of charge in each of the columns is measured by the sensing circuit to determine the positions of multiple objects when they touch the touch sensitive surface.

Each of these capacitive sensing methodologies has advantages and disadvantages that must be taken into account when designing a capacitive touch input device. For example, while self capacitance may be arranged in a wide variety of orientations (both 2D and non 2D arrays), they tend to produce a large number of I/O contacts especially as the resolution of the touch pad is increased (each electrode requires a separate I/O contact). The large number of I/O contacts create design difficulties especially in portable devices that are small. For example, they may require large chips and/or additional chips in order to process the large number of I/O contacts. These chips however take up valuable space inside the device and create stack up such that the device needs to be made larger to accommodate the chip(s). Furthermore, routing the I/O through traces from the electrodes to the chips may further exacerbate this problem as well as create new ones.

Unlike self capacitance, mutual capacitance can reduce the number of I/Os for the same resolution (sometimes by a factor of two). However, conventional mutual capacitance circuits are fixed to a 2D array of rows and columns (e.g., x and y) thus preventing uniquely shaped touch surfaces (e.g., non 2D arrays). Furthermore, while rows and columns that are used in mutual capacitive sensing circuits may be well suited for tracking or pointing, this arrangement may not be as well suited for other less complicated tasks associated with some application specific portable electronic devices. This is especially true when you consider the desire to maintain a small form factor with limited I/O contacts. Examples of less complicated tasks may include for example selection tasks such as buttoning and object movement tasks such as scrolling. Another problem with mutual capacitance may be in its accuracy due to parasitic capacitance that can be created using this methodology. Yet another problem with both technologies may be that they are only capable of reporting a single point when multiple objects are placed on the sensing surface. That is, they lack the ability to track multiple points of contact simultaneously.

The invention therefore pertains to improved features for touch devices used in portable electronic devices and more particularly touch devices that are based on capacitance. One aspect of the invention relates to a mutual capacitive sensing touch device that includes capacitive sensing nodes that reduce the number of I/O contacts and that are capable of being positioned in any orientation (e.g., 2D arrays are not a requirement). In fact, in one implementation, the capacitive sensing nodes are placed in a non 2D array. This presents a paradigm shift in the way that designers think about mutual capacitive sensing touch devices. In one example, the capacitive sensing nodes are positioned at angular positions in a circular manner.

These and other embodiments of the invention are discussed below with reference to FIGS. 1-18. However, those skilled in the art will readily appreciate that the detailed description given herein with respect to these figures is for explanatory purposes as the invention extends beyond these limited embodiments.

5

FIG. 1 is a circuit diagram of a mutual capacitive touch sensing input device 10, in accordance with one embodiment of the present invention. The mutual capacitive touch sensing input device 10 is configured to utilize a limited number of I/O contacts while maximizing its resolution, minimizing its size, and providing a multiplicity of orientations including non 2D arrays. Because of this, the input device may for example be placed in a variety of portable electronic devices and serve a wide variety of functions including for example scrolling, parameter control and buttoning. In fact, the input device works particularly well in small compact handheld devices such as cell phones and media players (e.g., music players, game players, video players, etc.).

The input device 10 includes a mutual capacitive sensing controller 12 that communicates with a touch sensitive element 14. The touch sensitive element 14 includes a plurality of independent and spatially distinct mutual capacitive sensing nodes 20 that are positioned about a touch surface of the touch sensitive element 14. The nodes 20 are dispersed such that each node 20 represents a different position on the touch surface. During operation, each of the mutual capacitive sensing nodes 20 produces a capacitance, and the mutual capacitive sensing controller 12 detects changes in the capacitance at each of the nodes 20. This information is used to determine touch events. In most cases, the nodes 20 are electrically coupled to the sensing controller 12 through traces or other well-known routing technologies such as those associated with printed circuit boards, flex circuits and integrated chips.

The touch sensitive element 14 can be widely varied. In some cases, it is mounted to or within a housing of the portable electronic device. For example, the element 14 may be utilized in a touch pad that is mounted within an opening in the housing of the portable electronic device. The touch pad may be a fixed to the portable electronic device or it may be movable so as to engage one or more actuators such as switches. In other cases, the touch sensitive element 14 is a thin layer applied over a component of the portable electronic device including for example the housing or a display of the portable electronic device. By way of example, the element 14 may be used to create a touch screen (e.g., over laid on top of a display). The touch screen may be a fixed to the portable electronic device or it may be movable so as to engage one or more actuators such as switches. Alternatively, the element 14 may be a portion of the housing (e.g., nodes are embedded inside the housing or adhered to the inside surface of the housing of the portable electronic device). Examples of various ways of situating the touch sensitive element 14 relative to an electronic device can be found in U.S. patent application Ser. Nos. 10/188,182, 10/722,948, 10/643,256, 10/840,862, 11/057,050 and 11/115,539, which are herein incorporated by reference.

The mutual capacitive sensing controller 12 can also be widely varied. In some cases, the mutual capacitive sensing controller 12 is a separate controller that is operatively coupled to a host controller of a portable electronic device (e.g., for example using a flex circuit or printed circuit board). In other cases the controller 12 is integrated into the host controller of the electronic device. That is, the sensing controller 12 is part of the host controller. Integration may be possible due to the reduced number of I/O contacts required by mutual capacitance technology.

Referring to FIG. 1, the mutual capacitive sensing controller 12 communicates with the nodes 20 via a plurality of distinct drive lines 16 and a number of distinct sense lines 18. The drive lines 16 are configured to carry current from the controller 12 to the mutual capacitive coupling nodes 20 and the sensing lines 18 are configured to carry a current from the

6

mutual capacitive coupling nodes 20 to the capacitive controller 12. The drive lines 16 capacitively couple to each of the sense lines 18 at the plurality of capacitive sensing nodes 20. Each node 20 is set up with a different combination of drive and sense line 16 and 18. For example, in the illustrated embodiment, the circuit 10 includes four drive lines 16 and four sense lines 18 thereby forming sixteen individual nodes 20. The number of nodes 20 is typically the number of drive lines multiplied by the number of sense lines. In some cases, the nodes are formed by an equal number of drive lines and sense lines. For example, the circuit may include the following arrangement of drive/sense-nodes, 2/2-4, 3/3-9, 4/4-16, 5/5-25, 6/6-36, 7/7-49, 8/8-64, 9/9-81, 10/10-100, and so on. In other cases, the nodes are formed by a different number of drive and sense lines. For example, the circuit may include the following arrangement of drive/sense-nodes 2/3-6, 3/5-15, 4/6-24, 5/8-40, 7/9-63, 9/10-90, and so on. It should be further pointed out that in some limited circumstances, the nodes may not equal the number of drive lines multiplied by the number of sense lines. For example, the number of nodes may be smaller than this number. This may be done in cases where the required number of nodes is a primary number [e.g., the designer simply does not make a node(s) even though there is a drive line(s) and sense line(s) to do so]. Accordingly, any number of nodes may be produced.

As shown, the drive lines 16 are connected to a voltage source 15 that separately drives the current through each of the driving lines 16. That is, the stimulus is only happening over one line while all the other lines are grounded. They may be driven similar to a raster scan. The sensing lines 18, on the other hand, are connected to a mutual capacitive sensing circuit 17 that monitors the sensing lines 18. In one embodiment, this is accomplished with independent sensing circuits that each monitor an individual sensing line. In this manner, the mutual capacitive sensing circuit 17 is capable of continuously monitoring the sensing lines 18 at the same time. That is, the mutual capacitive sensing circuit 17 is always monitoring the capacitance through the sensing lines 18. In another embodiment, instead of the sensing lines being all read at the same time by independent circuits, the sensing lines may be sequentially switched to a common sensing circuit and read one after the other (e.g., multiplexing). This tends to reduce the silicon area of the chip but it also increases the scanning time.

Although not shown in great detail in FIG. 1, each node 20 includes a drive electrode 22 coupled to one of the drive lines 16 and a sense electrode 24 coupled to one of the sense lines 18. This may for example be accomplished via traces or other related circuitry. The electrodes 22 and 24 are spatially separated and therefore cooperate to capacitively couple a charge there-through. The electrodes 22 and 24 may be arranged in a variety of ways. In one implementation, the electrodes 22 and 24 are plates that are juxtaposed next to one another in a side-by-side relationship thereby creating fringe fields when the drive electrode 22 is driven. In another implementation, the spaced apart electrodes 22 and 24 are disposed below an electrically isolated "floating" electrode. These and other embodiments will be described below.

Unlike conventional mutual capacitance devices, which have nodes that are fixed to intersection points of upper rows and lower columns, the electrode arrangement disclosed herein allows each node 20 to be placed at any location within a touch surface. This is similar to self capacitance technology that utilizes individual electrodes at each node. However, unlike self capacitance technology, the mutual capacitance technology reduces the number of I/O contacts required for the desired number of nodes. In self capacitance, each node

includes a distinct I/O contact and therefore to achieve sixteen nodes, at least seventeen I/O contacts are needed (one is for return ground). In essence, the invention described herein provides the benefits of each type of technology (e.g., nodes that can be placed anywhere while limiting the number of I/O contacts for a given resolution). Furthermore, although the nodes **20** are typically placed on a planar surface, in some circumstances the nodes **20** may be placed on a contoured surface. Moreover, the nodes **20** may be placed on multiple surfaces such as multiple sides of a portable electronic device.

Because the node location is not limited, the nodes **20** may be positioned in a conventional 2D array of rows and columns or alternatively they may be positioned in a non 2D array thereby allowing a wide variety of user interfaces to be created. In fact, non 2D arrays may be beneficial in creating user interfaces that better fit portable electronic devices. For example, different orientations of nodes **20** may be used to provide input functionality that is directed at the specific applications of the portable electronic device. The user interfaces may for example include scrolling regions or parameter control regions where nodes are set up in succession along a predetermined path, and/or button regions where individual nodes may represent distinct button functions. With regards to a scrolling or parameter control, the nodes may be placed in an open loop arrangement such as a line, or they may be placed in closed loop arrangement such as a circle. Generally speaking, the nodes can be placed to form any shape whether in a single plane or multiple planes. Examples include squares, rectangles, circles, semi-circles, ovals, triangles, trapezoids, other polygons, pill shapes, S shapes, U shapes, L shapes, star shapes, plus shape, etc.

Any number of nodes **20** may be used. The number of nodes **20** is typically determined by the size of the touch device as well as the size of the electrodes **22** and **24** used at the nodes **20**. In many cases, it is desirable to increase the number of nodes **20** so as to provide higher resolution (e.g., more information can be used for such things as acceleration). However, as the number increases, so does the number of I/Os. Therefore a careful balance between resolution and number of I/Os needs to be made when designing the touch device.

Furthermore, the size and shape of the nodes **20** may vary according to the specific needs of the touch device. Generally speaking, the nodes **20** can be formed from almost any shape and size. For example they may be formed as squares, rectangles, circles, semi-circles, ovals, triangles, trapezoids, other polygons and or more complicated shapes such as wedges, crescents, stars, lightning bolts, etc. In some cases, at least a portion and in some cases all the nodes **20** are identical. That is, they have the same size and shape. In other cases, at least a portion and in some cases all the nodes **20** have different sizes and/or shapes. For example, a first set of nodes **20** may have a first shape and a second set of nodes **20** may have a second shape that is different than the first shape. The configuration is typically dependent on the functionality that the touch device provides. For example, scrolling or parameter control nodes may be configured similarly within a scrolling or parameter control region, and button nodes may be configured differently than scrolling or parameter control nodes and each other. In essence, the size and shape depends on the desired functionality. If the functionality is the same then the size and shape the nodes tend to be same. If one functionality is more dominant than another functionality, then the size and shape may be matched accordingly. In some cases, the size of the nodes corresponds to about the size of a fingertip. In other cases, the size of the nodes are smaller than the size of a finger tip so as to improve the resolution of the

touch device (the finger can influence two of more nodes at anyone time thereby enabling interpolation).

During operation, the controller **12** directs a voltage to be applied to each drive line **16** separately. This happens sequentially until all the lines have been driven. For example, a voltage may first be applied to the first drive line **16A**, then the second drive line **16B**, then the third drive line **16C** and then the forth drive line **16D**. Once all the lines have been driven, the sequence starts over (continuously repeats). On the other hand, in one embodiment, the capacitive sensing circuit **17** of the controller **12** senses all of the sensing lines **18** in parallel. That is, each time a drive line is driven, each of the sensing lines **18A-18D** are monitored. This is typically accomplished with independent circuits. Alternatively, in another embodiment, each sense line may be monitored in sequence, to share the same sensing circuit (e.g. multiplexing each line to the sense circuit on-chip).

More particularly, because of the capacitive coupling, when a current is driven through a driving line **16**, the current is carried through to the sensing lines **18A-D** at each of the nodes **20** coupled to the driving line **16**. The sensing circuit **17** monitors the change in capacitance that occurs at each of the nodes **20** via the sensing lines **18A-D**. The positions where changes occur and possibly the magnitude of those changes are used to help recognize touch events.

When no object is present, the capacitive coupling at the node **20** stays fairly constant. When an object such as a finger is placed proximate the node **20**, the capacitive coupling changes through the node **20**. The object effectively shunts some of the field away so that the charge projected across the node **20** is less, i.e., the object steals charge thereby affecting the capacitance. The change in capacitive coupling changes the current that is carried by the sensing lines **18A-D**. The capacitance circuit **17** notes the current change and the particular node **20** where the current change occurred and reports this information in a raw or in some processed form to the host controller of the portable electronic device.

Although not shown in great detail in FIG. 1, the circuit **17** may additionally include filters for eliminating parasitic capacitance, which may for example be created when nodes, contacts and/or routing circuitry are located closely together. Generally speaking the filter rejects stray capacitance effects so that a clean representation of the charge transferred across the node is outputted (and not anything in addition to that). That is the filter produces an output that is not dependent on the parasitic capacitance, but rather on the capacitance at the node **20**. As a result, a more accurate output is produced. In one embodiment, the filters are embodied as inverting amplifiers that null the input voltage through each sense line.

FIG. 2 is a diagram of an inverting amplifier **40**, in accordance with one embodiment of the present invention. The inverting amplifier **40** may be used in the circuit **17** of FIG. 1 in order to reduce the parasitic capacitance. As shown, the inverting amplifier includes a non inverting input that is held at a constant voltage (in this case ground), an inverting input that is coupled to the node and an output that is coupled to the capacitive sensing circuit **17**. The output is coupled back to the inverting input through a capacitor and/or resistor. During operation, the input from the node may be disturbed by stray capacitance effects, i.e., parasitic capacitance. If so, the inverting amplifier is configured to drive the input back to the same voltage that it had been previously before the stimulus. As such, the value of the parasitic capacitance doesn't matter.

Analyzed from the circuit standpoint, the charge Q when injected into the circuit is proportional to the change in voltage. Because the change in voltage is nulled, the input is kept at a constant voltage, and therefore the net change that goes in

9

and out of the node is zero, which means the error signal at output of op amp is zero contribution related to the parasitics caused by other nodes.

FIG. 3A is a block diagram of a capacitive sensing circuit 60, in accordance with one embodiment of the present invention. The capacitive sensing circuit 60 may for example correspond to the capacitive sensing circuits described in FIG. 1. The capacitive sensing circuit 60 is configured to receive input data from a plurality of sensing points 62 (electrode, nodes, etc.), to process the data and to output processed data to a host controller.

The sensing circuit 60 includes a multiplexer 64 (MUX). The multiplexer 64 is a switch configured to perform time multiplexing. As shown, the MUX 64 includes a plurality of independent input channels 66 for receiving signals from each of the sensing points 62 at the same time. The MUX 64 stores all of the incoming signals at the same time, but sequentially releases them one at a time through an output channel 68.

The sensing circuit 60 also includes an analog to digital converter 70 (ADC) operatively coupled to the MUX 64 through the output channel 68. The ADC 70 is configured to digitize the incoming analog signals sequentially one at a time. That is, the ADC 70 converts each of the incoming analog signals into outgoing digital signals. The input to the ADC 70 generally corresponds to a voltage having a theoretically infinite number of values. The voltage varies according to the amount of capacitive coupling at each of the sensing points 62. The output to the ADC 70, on the other hand, has a defined number of states. The states generally have predictable exact voltages or currents.

The sensing circuit 60 also includes a digital signal processor 72 (DSP) operatively coupled to the ADC 70 through another channel 74. The DSP 72 is a programmable computer processing unit that works to clarify or standardize the digital signals via high speed mathematical processing. The DSP 74 is capable of differentiating between human made signals, which have order, and noise, which is inherently chaotic. In most cases, the DSP performs filtering and conversion algorithms using the raw data. By way of example, the DSP may filter noise events from the raw data, calculate the touch boundaries for each touch that occurs on the touch screen at the same time, and thereafter determine the coordinates for each touch event. The coordinates of the touch events may then be reported to a host controller where they can be compared to previous coordinates of the touch events to determine what action to perform in the host device.

Another embodiment of the capacitive sensing circuit is shown in FIG. 3B. This embodiment is similar to FIG. 3A, but more simplified. In this embodiment, channel is followed by its own dedicated demodulator and A/D converter. The demodulator is basically an analog multiplier with one input tied to the pulse generator signal, and the other input tied to the output of the channel charge amplifier. The output of the demodulator feeds the A/D converter, which is a delta-sigma type of converter.

In one implementation of this embodiment, the circuit waits until a timer (or host controller) indicates that a sensing cycle should begin. Thereafter, a pulse train is sent to the first drive line (e.g., 12 pulses which are each 3 μ S period). Then, synchronous charge coupling is sensed on all sense lines. This may for example be accomplished by demodulating the charge transferred to the sense lines using the pulse train phase and frequency reference. Thereafter, an A/D conversion is performed on the sensed synchronous charge transfer for each sense line. Then, each data is associated with the specific capacitor being sensed, which is identified by the

10

combination of the particular drive line and sense line which are connected to the capacitor of interest. Then, the data from the A/D converter is signal processed using techniques such as baseline subtraction, low pass filter, etc. Thereafter, the processed data is communicated to the host, or is act on in an appropriate manner. This method may be repeated for each drive line.

A variety of nodes that can be utilized in the embodiments described above will now be described in conjunction with FIGS. 4-7. It should be appreciated that this are given by way of example and not by way of limitation as the invention can extend beyond these limited embodiments.

FIG. 4 is a diagram of a mutual capacitive sensing node 100, in accordance with one embodiment of the present invention. The node 100 is formed from various layers including a cover film 102, an electrode layer 104 and a substrate 106. The cover film 102 is disposed over the electrode layer 104 and the electrode layer 104 is disposed over the substrate 106. The electrode layer 104 includes a drive electrode 108 and a sense electrode 110 that are spaced apart from one another in order to electrically isolate them from each other. The drive electrode 108 is coupled to a drive line and the sense electrode 110 is coupled to a sense line. When the drive electrode 108 is driven with a voltage or current, the voltage or current is capacitively coupled to the sense electrode 110 via fringe fields 112 that come up through the cover film 102. When an object is placed over the node 100, the finger short-cuts or steals some of the field lines 112 away effectively reducing the capacitance that is coupled through the node 100.

The electrodes 108 and 110 may be formed from almost any shape and size. For example they may be formed as squares, rectangles, circles, semi-circles, ovals, triangles, trapezoids, other polygons and or more complicated shapes such as wedges, crescents, stars, lightning bolts, etc. The size and shape of the electrodes 108 and 110 typically depends on the size and shape of the node 100. In some cases, the electrodes 108 and 110 are equal pairs having the same size and shape. For example, the node 100 may be divided equally in half. In other cases, the electrodes 108 and 110 are disparate pairs having different sizes and/or shapes. For example, the drive electrode 108 may have a first size and/or shape and the sense electrode 110 may have a second size and/or shape that is different than the first shape. By way of example, it may be beneficial to have a larger drive electrode and a smaller sense electrode (or vice versa).

FIG. 5 is a diagram of a mutual capacitive sensing node 120, in accordance with one embodiment of the present invention. The node 120 is similar to the node 100 described in FIG. 4 except that the drive electrode 108 and sense electrode 110 are interleaved rather than being juxtaposed plates.

FIG. 6 is a diagram of a mutual capacitive sensing node 140, in accordance with one embodiment of the present invention. The node 140 is similar to the nodes 100 or 120 described in FIGS. 4 and 5 in that it uses spaced apart electrodes 108 and 110. However, unlike the embodiments described above, the node 140 further includes a floating (electrically isolated) electrode 142 disposed above the electrode pairs 108 and 110. As shown, the drive and sense electrodes 108 and 110 are disposed underneath a substrate 106, and the floating electrode 142 is disposed over the substrate 106. Furthermore, the cover film 102 is disposed over the floating electrode 142. In this embodiment, the driving current is capacitively coupled to the floating electrode from the driving electrode 108 then it is capacitively coupled to the sense electrode 110. Moreover, the outer dimension of the floating electrode 142 typically matches the outer dimensions

11

of the electrode pairs **108** and **110**, although in some circumstances it may be desirable to make the outer dimension of the floating electrode **142** smaller or larger than the outer dimension of the electrode pairs **108/110**.

FIGS. **7A** and **7B** show the embodiment of FIG. **6** in circuit diagram form. In this illustration, **C1** is the capacitance between the drive electrode **108** and the floating electrode **142**, **C2** is the capacitance between the floating electrode **142** and the sense electrode **110**, and **C3** is the capacitance between a finger **144** and the floating electrode **142**. **C3** is the only capacitance that changes (only exists when a finger or other related object is present).

For illustration purposes, assume that a typical value for **C1** is 2 pF, **C2** is 2 pF and **C3** is 2 pF. When there is no touch, the capacitance **C1** and **C2** are placed in series thereby creating a total net capacitance of 1 pF. This capacitance is fed through a sense line and read by the capacitance sensing circuit. When there is a touch, the capacitance **C2** and **C3** are first combined together (because the sense electrode is held at virtual ground) then the capacitance **C1** (2 pF) and **C23** (4 pF) are placed in series thereby creating a total net capacitance of $(4 \text{ pF} \times 2 \text{ pF}) / (4 \text{ pF} + 2 \text{ pF}) = \frac{8}{6} \text{ pF}$. However, the total charge transfer is split equally between **C2** and **C3**, so the charge transfer through **C2** is $\frac{1}{2}$ of the total, or $\frac{2}{3}$ pF. This capacitance is fed through a sense line and read by the capacitance sensing circuit. The capacitance sensing circuit differentiates between a no touch and a touch by checking these values (e.g., no touch=1 pF, touch=something other than 1 pF). The value of the capacitance for a touch may further be used to determine touch pressure as the capacitance typically changes with increased pressure.

Referring to all the node designs mentioned above (FIGS. **4-7**), the substrate **106** may for example be a printed circuit board or a flexible membrane such as those of a flex circuit or some other suitable material for supporting the electrodes **108** and **110** thereon (e.g., housing of portable electronic device). Furthermore, the electrodes **108** and **110** may be formed from any thin conductive material. By way of example, the electrodes **108** and **110** may be embodied as a metallic foil that is adhered to the substrate **106**, a conductive paint or ink that is coated on the substrate **106**, a conductive material that is printed, deposited or etched on the substrate **106**, plates or bands that are molded or embedded into the substrate **106** or any other suitable arrangement. Moreover, the cover film **102** may be formed from any suitable dielectric material such as glass or plastic. The cover film **102** serves to protect the underlayers and provide a surface for allowing an object to slide thereon. The cover film **102** also provides an insulating layer between the object and the electrode layer **104**. Furthermore, the cover film **102** is suitable thin to allow sufficient electrode coupling.

In some cases, the various layers may further be embodied as transparent or semi transparent materials. For example, the conductive material of the electrodes may be formed from indium tin oxide (ITO), the dielectric material of the film may be formed as clear or partially transparent plastic or glass, and the substrate may be formed as clear or partially transparent plastic or glass (e.g., clear Mylar sheet). This may be done to allow visual feedback through the various layers of the touch device.

Moreover, the electrode layer **104** may include interconnects for coupling the electrodes **108** and **110** to the driving and sensing lines. Alternatively, the driving and sensing lines may be formed with the electrodes **108** and **110** in the same step/layer.

In one implementation, the electrodes are placed on one side of a printed circuit board (PCB), and the mutual capaci-

12

tance sensing circuit in the form an integrated circuit chip is mounted on the back side of the chip, with conventional PCB routing connecting the I/O contacts of the electrodes to the I/O contacts of the IC chip. The IC chip may for example be an ASIC. In another implementation, the electrodes are placed on one side of a printed circuit board (PCB) and the I/O contacts are coupled to the I/O contacts of a floating IC via a flex circuit with printed traces (sensing and driving lines). For example, the PCB containing the electrodes is connected to one end of a flex circuit and the sensor IC is attached to the other end of the flex circuit. Alternatively, the electrodes may be applied directly to the flexible member of the flex circuit.

Several touch devices **200-280** with nodes **202** set up in a non 2D array will now be described in conjunction with FIGS. **8-15**. It should be appreciated that this are given by way of example and not by way of limitation as the invention can extend beyond these limited embodiments.

In most of these embodiments, the touch devices includes a plurality of nodes **202** that are positioned side by side along a predetermined path. This arrangement works particularly well for performing scrolling operations or parameter control operations. The path may be a closed loop path or an opened loop path. Furthermore, each of the nodes **202** include an electrode pair of drive electrode **204** and sense electrode **206**. Moreover, the number of drive lines **208** is equal to the number of sense lines **210**, and further the number of nodes **202** is the square of this number. It should be appreciated however that this is not a limitation.

FIG. **8** is a diagram of a circular touch device **200**. The circular touch device **200** is divided into several independent and spatially distinct nodes **202** that are positioned in a circular manner. Each of the nodes **202** represents a different angular position within the circular shape. Although not shown, the nodes may also be placed at radial locations from the center of the touch surface to the perimeter of the touch surface.

FIG. **9** is a diagram of a linear touch device **220**. The linear touch device **220** is divided into several independent and spatially distinct nodes **202** that are positioned next to one another along a straight line. Each of the nodes **202** represents a different linear position. Although shown vertical, it should be appreciated that the linear touch device may also be horizontal or at an angle. Moreover, although shown straight, in some cases it may be desirable to use a curved line such as one that is U shaped, S shaped, etc.

FIG. **10** is a diagram of another type of linear touch device **230**. The linear touch device **230** is divided into several independent and spatially distinct nodes **202** that are positioned in the form of a "+" shape. This embodiment includes both a horizontal line and a vertical line that cross each other.

FIG. **11** is a diagram of a combined touch device **240**. For example, it may combine two sets of scrolling/parameter control regions as for example the circular region described in FIG. **9** and the plus region described in FIG. **10**.

FIGS. **12-14** are diagrams of a touch devices **250-270** include a scrolling or parameter control set up **282** and one or more distinct buttons **284**. The scrolling or parameter control set up **282** include nodes **202** configured similarly to any of those previously described **200-240**. The buttons **284**, on the other hand, include additional node(s) **202**. Each button may include one or more nodes. The minimum required node is one, but in some cases it may be desirable to include multiple nodes. The buttons **284** may be positioned inside and/or outside the scrolling region **282**. They may be placed in close proximity of the scrolling region **282** as for example around

13

the periphery of the scrolling region **282** (FIGS. **12** and **13**) and/or they may be placed away from the scrolling region **282** (FIG. **14**).

FIG. **15** is diagram of a touch device **280** that only includes a button arrangement having a plurality of buttons **284**. Each button **284** has a different task or function assigned thereto. The buttons **284** may be arranged in any manner within a user interface of an electronic device.

FIG. **16** is a diagram of a touch assembly **300**, in accordance with one embodiment of the present invention. The touch assembly **300** includes a plurality of mutual capacitive sensing nodes **302** coupled to a host controller **304** via flex circuit **306**. The nodes **302** may be disposed on the flexible member of the flex circuit **306** or alternatively on a printed circuit board that is attached to the flexible member of the flex circuit. The nodes **302** include a drive electrode **308** and a sense electrode **310** as described above. Although the nodes and electrodes can be arranged in accordance with any of the embodiments described above, in the illustrated embodiment the nodes and electrodes are set up similarly to FIG. **8**.

The flexible member **307** of the flex circuit **306** includes a first neck **312**, a landing area **314** and a second neck **316**. The first neck **312** includes a plurality of traces **313** coupling the I/O contacts of the nodes **302** to corresponding I/O contacts of an input controller **318** disposed on the landing area **314** of the flex circuit **306**. The input controller **318** may for example include a capacitive sensing microprocessor. In order to reduce the number of traces and I/O contacts of the input controller, the drive and sense electrodes of the nodes may be configured to share the traces that couple back to the I/O contacts of the input controller. Furthermore, in order to allow sensing, each node may include a different arrangement of drive and sense trace coupled to their corresponding electrodes. In one embodiment, the number of traces and thus the number of I/O contacts is less than the number nodes **302**. In one implementation of this embodiment, the number of traces and thus the number of I/O contacts of the input controller is equal to the square root of the number of nodes **302**. This is in contrast to a self capacitive device where there is typically one trace for each electrode as well as one for ground. (e.g., in the case of a sixteen electrodes, there would be seventeen traces on the first neck **312**). Additional traces may be provided for other input means as for example mechanical buttons, switches, etc.

The second neck **316** includes a plurality of traces **317** coupling the I/O contacts of the input controller **318** to corresponding I/O contacts of the host controller **304**. The number of lines typically depends on the communication protocol being used. By way of example, the second neck **316** may include six traces **317** for power and serial data (e.g., USB). In some cases, the flex circuit **306** is connected to the host controller **304** through a connector arrangement that utilizes pins or contacts (e.g., male/female). In this way, the touch sensing unit **302** and flex circuit **306** is a separate unit that can couple to and decouple from the host controller **304** thereby making assembly easier. In other cases, they are permanently attached thereby creating a single unit. The host controller **304** may be positioned on the flexible member of the flex circuit or alternatively on a printed circuit board such as the main board of the electronic device.

FIG. **17** is a block diagram of an exemplary electronic device **350**, in accordance with one embodiment of the present invention. The electronic device typically includes a processor **356** configured to execute instructions and to carry out operations associated with the electronic device **350**. For example, using instructions retrieved for example from memory, the processor **356** may control the reception and

14

manipulation of input and output data between components of the electronic device **350**. The processor **356** can be implemented on a single-chip, multiple chips or multiple electrical components. For example, various architectures can be used for the processor **356**, including dedicated or embedded processor, single purpose processor, controller, ASIC, and so forth.

In most cases, the processor **356** together with an operating system operates to execute computer code and produce and use data. The operating system may correspond to well known operating systems such as OSX, DOS, Unix, Linux, and Palm OS, or alternatively to special purpose operating system, such as those used for limited purpose appliance-type devices (e.g., media players). The operating system, other computer code and data may reside within a memory block **358** that is operatively coupled to the processor **356**. Memory block **358** generally provides a place to store computer code and data that are used by the electronic device **350**. By way of example, the memory block **58** may include Read-Only Memory (ROM), Random-Access Memory (RAM), hard disk drive, flash memory and/or the like.

The electronic device **350** also includes a display **368** that is operatively coupled to the processor **356**. The display **368** is generally configured to display a graphical user interface (GUI) that provides an easy to use interface between a user of the electronic device **350** and the operating system or application running thereon. The display **368** may for example be a liquid crystal display (LCD).

The electronic device **350** also includes one or more touch sensing devices **380** that utilize the mutual capacitive sensing technology described herein. The one or more touch sensing devices are operatively coupled to the processor **356**. The touch sensing devices **380** are configured to transfer data from the outside world into the electronic device **350**. The touch sensing device **380** may for example be used to perform movements such as scrolling and to make selections with respect to the GUI on the display **368**. The touch sensing device **380** may also be used to issue commands in the electronic device **350**. The touch sensing devices may be selected from fixed and/or movable touch pads, touch screens and/or touch sensitive housings.

The touch sensing device **380** recognizes touches, as well as the position and magnitude of touches on a touch sensitive surface. The touch sensing device **380** reports the touches to the processor **356** and the processor **356** interprets the touches in accordance with its programming. For example, the processor **356** may initiate a task in accordance with a particular touch. Alternatively, a dedicated processor can be used to process touches locally at the touch sensing device and reduce demand for the main processor of the electronic device.

In one particular embodiment of the present invention, the electronic devices described above correspond to hand-held electronic devices with small form factors. As used herein, the term "hand held" means that the electronic device is typically operated while being held in a hand and thus the device is sized and dimension for such use. Examples of hand held devices include PDAs, Cellular Phones, Media players (e.g., music players, video players, game players), Cameras, GPS receivers, Remote Controls, and the like.

As should be appreciated, the touch sensing device can reduce the number of input devices needed to support the device and in many cases completely eliminate input devices other than the touch sensing devices. The device is therefore more aesthetically pleasing (e.g., planar smooth surfaces with limited to no breaks gaps or lines), and in many cases can be made smaller without sacrificing screen size and input functionality, which is very beneficial for hand held electronic

15

device especially those hand held electronic device that are operated using one hand (some hand held electronic device require two handed operation while others do not).

The touch sensing devices of the present invention are a perfect fit for small form factor devices such as hand held devices, which have limited space available for input interfaces, and which require adaptable placement of input interfaces to permit operation while being carried around. This is especially true when you consider that the functionality of handheld devices have begun to merge into a single hand held device. At some point, there is not enough real estate on the device for housing all the necessary buttons and switches without decreasing the size of the display or increasing the size of the device, both of which leave a negative impression on the user. In fact, increasing the size of the device may lead to devices, which are no longer considered "hand-held."

In one particular implementation, the hand held device is a music player and the touch sensing devices are configured to generate control signals associated with a music player. For example, the touch sensing device may include list scrolling functionality, volume control functionality and button functionality including, Select, Play/Pause, Next, Previous and Menu.

FIG. 18 is a perspective diagram of a media player 400, in accordance with one embodiment of the present invention. The term "media player" generally refers to computing devices that are dedicated to processing media such as audio, video or other images, as for example, music players, game players, video players, video recorders, cameras and the like. These devices are generally portable so as to allow a user to listen to music, play games or video, record video or take pictures wherever the user travels. In one embodiment, the media player is a handheld device that is sized for placement into a pocket of the user. By being pocket sized, the user does not have to directly carry the device and therefore the device can be taken almost anywhere the user travels (e.g., the user is not limited by carrying a large, bulky and often heavy device, as in a portable computer).

Media players generally have connection capabilities that allow a user to upload and download data to and from a host device such as a general purpose computer (e.g., desktop computer, portable computer). For example, in the case of a camera, photo images may be downloaded to the general purpose computer for further processing (e.g., printing). With regards to music players, songs and play lists stored on the general purpose computer may be downloaded into the music player. In the illustrated embodiment, the media player 400 is a pocket sized hand held MP3 music player that allows a user to store a large collection of music. By way of example, the MP3 music player may correspond to any of those iPod music players manufactured by Apple Computer of Cupertino, Calif. (e.g., standard, mini, iShuffle, Nano, etc.).

As shown in FIG. 18, the media player 400 includes a housing 402 that encloses internally various electrical components (including integrated circuit chips and other circuitry) to provide computing operations for the media player 400. The integrated circuit chips and other circuitry may include a microprocessor, memory (e.g., ROM, RAM), a power supply (e.g., battery), a circuit board, a hard drive, and various input/output (I/O) support circuitry. In the case of music players, the electrical components may include components for outputting music such as an amplifier and a digital signal processor (DSP). In the case of video recorders or cameras the electrical components may include components for capturing images such as image sensors (e.g., charge coupled device (CCD) or complimentary oxide semiconductor (CMOS)) or optics (e.g., lenses, splitters, filters). In addition to the above, the housing may also define the shape or form of the media player. That is, the contour of the housing 402 may embody the outward physical appearance of the media player 400.

16

tion to the above, the housing may also define the shape or form of the media player. That is, the contour of the housing 402 may embody the outward physical appearance of the media player 400.

The media player 400 also includes a display screen 404. The display screen 404 is used to display a graphical user interface as well as other information to the user (e.g., text, objects, graphics). By way of example, the display screen 404 may be a liquid crystal display (LCD). As shown, the display screen 404 is visible to a user of the media player 400 through an opening 405 in the housing 402, and through a transparent wall 406 that is disposed in front of the opening 405. Although transparent, the transparent wall 406 may be considered part of the housing 402 since it helps to define the shape or form of the media player 400.

The media player 400 also includes a touch pad 410. The touch pad 410 is configured to provide one or more control functions for controlling various applications associated with the media player 400. For example, the touch initiated control function may be used to move an object or perform an action on the display screen 404 or to make selections or issue commands associated with operating the media player 400. In most cases, the touch pad 410 is arranged to receive input from a finger moving across the surface of the touch pad 410 in order to implement the touch initiated control function.

The manner in which the touch pad 410 receives input may be widely varied. In one embodiment, the touch pad 410 is configured receive input from a linear finger motion. In another embodiment, the touch pad 410 is configured receive input from a rotary or swirling finger motion. In yet another embodiment, the touch pad 410 is configured receive input from a radial finger motion. Additionally or alternatively, the touch pad 410 may be arranged to receive input from a finger tapping on the touch pad 400. By way of example, the tapping finger may initiate a control function for playing a song, opening a menu and the like.

In one embodiment, the control function corresponds to a scrolling feature. For example, in the case of an MP3 player, the moving finger may initiate a control function for scrolling through a song menu displayed on the display screen 404. The term "scrolling" as used herein generally pertains to moving displayed data or images (e.g., text or graphics) across a viewing area on a display screen 404 so that a new set of data (e.g., line of text or graphics) is brought into view in the viewing area. In most cases, once the viewing area is full, each new set of data appears at the edge of the viewing area and all other sets of data move over one position. That is, the new set of data appears for each set of data that moves out of the viewing area. In essence, the scrolling function allows a user to view consecutive sets of data currently outside of the viewing area. The viewing area may be the entire viewing area of the display screen 104 or it may only be a portion of the display screen 404 (e.g., a window frame).

The direction of scrolling may be widely varied. For example, scrolling may be implemented vertically (up or down) or horizontally (left or right). In the case of vertical scrolling, when a user scrolls down, each new set of data appears at the bottom of the viewing area and all other sets of data move up one position. If the viewing area is full, the top set of data moves out of the viewing area. Similarly, when a user scrolls up, each new set of data appears at the top of the viewing area and all other sets of data move down one position. If the viewing area is full, the bottom set of data moves out of the viewing area. In one implementation, the scrolling feature may be used to move a Graphical User Interface (GUI) vertically (up and down), or horizontally (left and right) in order to bring more data into view on a display screen. By way

17

of example, in the case of an MP3 player, the scrolling feature may be used to help browse through songs stored in the MP3 player. The direction that the finger moves may be arranged to control the direction of scrolling. For example, the touch pad may be arranged to move the GUI vertically up when the finger is moved in a first direction and vertically down when the finger is moved in a second direction

To elaborate, the display screen **404**, during operation, may display a list of media items (e.g., songs). A user of the media player **400** is able to linearly scroll through the list of media items by moving his or her finger across the touch pad **410**. As the finger moves around the touch pad **410**, the displayed items from the list of media items are varied such that the user is able to effectively scroll through the list of media items. However, since the list of media items can be rather lengthy, the invention provides the ability for the user to rapidly traverse (or scroll) through the list of media items. In effect, the user is able to accelerate their traversal of the list of media items by moving his or her finger at greater speeds.

In one embodiment, the media player **400** via the touch pad **410** is configured to transform a swirling or whirling motion of a finger into translational or linear motion, as in scrolling, on the display screen **404**. In this embodiment, the touch pad **410** is configured to determine the angular location, direction, speed and acceleration of the finger when the finger is moved across the top planar surface of the touch pad **410** in a rotating manner, and to transform this information into signals that initiate linear scrolling on the display screen **404**. In another embodiment, the media player **400** via the touch pad **410** is configured to transform radial motion of a finger into translational or linear motion, as in scrolling, on the display screen **404**. In this embodiment, the touch pad **410** is configured to determine the radial location, direction, speed and acceleration of the finger when the finger is moved across the top planar surface of the touch pad **410** in a radial manner, and to transform this information into signals that initiate linear scrolling on the display screen **404**. In another embodiment, the media player **400** via the touch pad **410** is configured to transform both angular and radial motion of a finger into translational or linear motion, as in scrolling, on the display screen **404**.

The touch pad generally consists of a touchable outer surface **411** for receiving a finger for manipulation on the touch pad **410**. Although not shown in FIG. 20, beneath the touchable outer surface **411** is a sensor arrangement. The sensor arrangement includes a plurality of sensors that are configured to activate as the finger performs an action over them. In the simplest case, an electrical signal is produced each time the finger passes a sensor. The number of signals in a given time frame may indicate location, direction, speed and acceleration of the finger on the touch pad, i.e., the more signals, the more the user moved his or her finger. In most cases, the signals are monitored by an electronic interface that converts the number, combination and frequency of the signals into location, direction, speed and acceleration information. This information may then be used by the media player **400** to perform the desired control function on the display screen **404**. By way of example, the sensor arrangement may correspond to any of those described herein.

The position of the touch pad **410** relative to the housing **402** may be widely varied. For example, the touch pad **410** may be placed at any external surface (e.g., top, side, front, or back) of the housing **402** that is accessible to a user during manipulation of the media player **400**. In most cases, the touch sensitive surface **411** of the touch pad **410** is completely exposed to the user. In the illustrated embodiment, the touch pad **410** is located in a lower, front area of the housing **402**.

18

Furthermore, the touch pad **410** may be recessed below, level with, or extend above the surface of the housing **402**. In the illustrated embodiment, the touch sensitive surface **411** of the touch pad **410** is substantially flush with the external surface of the housing **402**.

The shape of the touch pad **410** may also be widely varied. For example, the touch pad **410** may be circular, rectangular, triangular, and the like. In general, the outer perimeter of the shaped touch pad defines the working boundary of the touch pad. In the illustrated embodiment, the touch pad **410** is circular. Circular touch pads allow a user to continuously swirl a finger in a free manner, i.e., the finger can be rotated through 360 degrees of rotation without stopping. Furthermore, the user can rotate his or her finger tangentially from all sides thus giving it more range of finger positions. For example, when the media player is being held, a left handed user may choose to use one portion of the touch pad **410** while a right handed user may choose to use another portion of the touch pad **410**. More particularly, the touch pad is annular, i.e., shaped like or forming a ring. When annular, the inner and outer perimeter of the shaped touch pad defines the working boundary of the touch pad.

In addition to above, the media player **400** may also include one or more buttons **412**. The buttons **412** are configured to provide one or more dedicated control functions for making selections or issuing commands associated with operating the media player **400**. By way of example, in the case of an MP3 music player, the button functions may be associated with opening a menu, playing a song, fast forwarding a song, seeking through a menu and the like. The button functions are implemented via a mechanical clicking action or alternatively via a sensor arrangement such as those described herein. The position of the buttons **412** relative to the touch pad **410** may be widely varied. For example, they may be adjacent one another or spaced apart. In the illustrated embodiment, the buttons **412** are separated from the touch pad **410** (see for example FIG. 14). As shown, there are four buttons **412A** in a side by side relationship above the touch pad **410** and one button **412B** disposed in the center or middle of the touch pad **410**. By way of example, the plurality of buttons **412** may consist of a menu button, play/stop button, forward seek button and a reverse seek button, select button (enter) and the like. Alternatively or additionally, the buttons may be implemented with a movable touch pad.

Moreover, the media player **400** may also include a hold switch **414**, a headphone jack **416** and a data port **418**. The hold switch **414** is configured to turn the input devices of the media device **400** on and off. The headphone jack **416** is capable of receiving a headphone connector associated with headphones configured for listening to sound being outputted by the media device **400**. The data port **418** is capable of receiving a data connector/cable assembly configured for transmitting and receiving data to and from a host device such as a general purpose computer. By way of example, the data port **418** may be used to upload or download songs to and from the media device **400**. The data port **418** may be widely varied. For example, the data port may be a PS/2 port, a serial port, a parallel port, a USB port, a Firewire port and the like. In some cases, the data port **118** may be a radio frequency (RF) link or optical infrared (IR) link to eliminate the need for a cable. Although not shown in FIG. 20, the media player **400** may also include a power port that receives a power connector/cable assembly configured for delivering powering to the media player **400**. In some cases, the data port **418** may serve as both a data and power port.

In any of the embodiments described or contemplated by this specification, the touch sensing devices may be config-

19

ured to provide visual information to indicate when and where the touches occur, to invoke a touch (location where a user should touch), or as otherwise programmed. In the case of a touch screen, the visual information may be provided by the graphical display positioned behind the touch screen. In the case of the touch sensitive housing, or touch pad (or possibly with the touch screen), this may be accomplished with a visual feedback system that is capable of adjusting the visual stimuli of the touch surface.

The visual feedback system may include visual surface changing elements, which can be separate or integral with the sensing elements. In fact, the visual surface changing elements may be mapped to the sensor coordinates such that particular visual surface changing elements are tied to particular sensor coordinates. By way of example, the visual surface changing elements may be light devices such as light emitting diodes that illuminate the touch surface. For example, the light devices may be positioned in an array or matrix similarly to the sensing devices. Alternatively, the visual surface changing elements may be embodied as electronic inks or other color changing surfaces.

If used, this visual feedback feature allows the display of pop-up buttons, characters, and indicators around the touch surface, which can disappear when not in use or required, or glowing special effects that trace or outline a users fingers in contact with the touch surface, or otherwise provide visual feedback for the users of the device. In one implementation, the handheld device is configured to sense one or more touches and provide visual feedback in the area of the touches. In another implementation, the handheld device is configured to provide visual feedback on the touch surface, detect a touch in the area of the visual feedback, and to perform an action that is associated with the visual feedback. An example of such an arrangement can be found in U.S. patent application Ser. No. 11/394,493, which is herein incorporated by reference.

While this invention has been described in terms of several preferred embodiments, there are alterations, permutations, and equivalents, which fall within the scope of this invention. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present invention. It is therefore intended that the following appended claims be interpreted as including all such alterations, permutations, and equivalents as fall within the true spirit and scope of the present invention.

What is claimed is:

1. A touch sensing device, comprising:

a mutual capacitive sensing controller having a plurality of distinct drive lines and a plurality of distinct sense lines, a source for driving a current or voltage separately though each drive line, a mutual capacitance sensing circuit that monitors the capacitance at the sensing lines;

a plurality of independent and spatially distinct mutual capacitive sensing nodes set up in a non two dimensional array, each node including a drive electrode that is spatially separated from a sense electrode, the drive electrode and the sense electrode being configured to capacitively couple a drive line and a sense line,

the plurality of drive lines configured to carry current from the controller to the nodes,

the plurality of sense lines configured to carry current from the plurality of nodes to the controller,

wherein the nodes comprise multiple node groups, at least a first of the node groups comprising multiple nodes, each node in a node group being associated with a sense line that is common to all nodes in the group and a drive line that is not common to any other node in the group,

20

one node in each node group being associated with a drive line that is common to all node groups.

2. The touch sensing device as recited in claim 1 wherein the nodes are positioned next to one another in succession along a prescribed path.

3. The touch sensing device as recited in claim 2 wherein the nodes form a linear path.

4. The touch sensing device as recited in claim 2 wherein the nodes form a circular path.

5. The touch sensing device as recited in claim 4 wherein the nodes represent angular input areas disposed around a circle.

6. The touch sensing device as recited in claim 2 wherein the nodes are placed in an open loop arrangement.

7. The touch sensing device as recited in claim 2 wherein the nodes are placed in a closed loop arrangement.

8. The touch sensing device as recited in claim 1 wherein a portion of the nodes form a scrolling region.

9. The touch sensing device as recited in claim 1 wherein a portion of the nodes form buttons that represent distinct button functions.

10. The touch sensing device as recited in claim 1 further including a filter that rejects parasitic capacitance effects so that a clean representation of the charge transferred across the node is outputted.

11. The touch sensing device as recited in 1 wherein the nodes include a cover film, an electrode layer and a substrate, the cover film being disposed over the electrode layer, the electrode layer being disposed over the substrate, the electrode layer including the drive and sense electrodes.

12. The touch sensing device as recited in 1 wherein the drive and sense electrodes are juxtaposed plates.

13. The touch sensing device as recited in 1 wherein the drive and sense electrode are interleaved with one another.

14. The touch sensing device as recited in 1 further including a floating electrode disposed over and spatially separated from the electrode pair of the node.

15. The touch sensing device as recited in 1 wherein the mutual capacitance sensing circuit continuously monitors all the sensing lines at the same time.

16. The touch sensing device as recited in 1 wherein the mutual capacitance sensing circuit monitors all the sensing lines sequentially.

17. The touch sensing device as recited in 1 wherein the number of nodes is equal to the number of drive lines multiplied by the number of sense lines.

18. The touch sensing device as recited in 17 wherein the number of drive lines is equal to the number of sense lines.

19. The touch sensing device as recited in 17 wherein the number of drive lines is different than the number of sense lines.

20. The touch sensing device as recited in 1 wherein the number of nodes is less than the number of drive lines multiplied by the number of sense lines.

21. A mutual capacitive sensing method, comprising: separately driving a voltage or current through each of multiple drive lines;

capacitively coupling current between mutual capacitive sensing nodes comprising drive electrodes that are coupled to the driven drive line and corresponding sense electrodes that are coupled to different sense lines, the nodes forming multiple node groups, each of the multiple groups comprising multiple nodes, each node in a group being associated with a sense line that is common to all nodes in the group and a drive line that is not

21

common to any other node in the group, one node in each group being associated with a drive line that is common to all groups,
 detecting with a mutual capacitance sensing circuit capacitance at drive and sense electrode pairs through each sense line each time a drive line is driven;
 determining which electrode pairs have been touched based on detected capacitance; and
 performing actions based on which electrode pairs have been touched.

22. The method as recited in claim 21 further including filtering parasitic capacitance created by non driven electrode pairs.

23. A touch sensing device that operates via mutual capacitance, comprising:
 multiple mutual capacitance sensing nodes,
 each mutual capacitance sensing node including a drive electrode that is spatially separated and juxtaposed next to a sense electrode, the drive electrode being coupled to a drive line and the sense electrode being coupled to a sense line of a mutual capacitance sensing circuit, and a floating electrode disposed over and spatially separated from the drive electrode and the sense electrode,
 the nodes being arranged in multiple groups,
 each of the multiple groups comprising multiple nodes,
 each node in a group being associated with a sense line that is common to all nodes in the group and a drive line that is not common to any other node in the group,
 one node in each group being associated with a drive line that is common to all groups.

24. A mutual capacitance touch sensing device, comprising:
 a plurality of mutual capacitance sensing nodes arranged in a non 2D array and coupled to drive lines and sense lines, each node comprising an electrode pair of drive electrode and sense electrode configured to capacitively couple a drive line and a sense line, at least one of the drive lines configured to carry a current to the drive electrode of the node, and at least one of the sense lines configured to carry a current from the sense electrode of the node to a mutual capacitance sensing circuit indicating a change in capacitance at the node,
 the nodes comprising node groups, each node in a node group being associated with a sense line that is common to all nodes in the group and a drive line that is not common to any other node in the group, one node in each node group being associated with a drive line that is common to all node groups.

25. The mutual capacitance touch sensing device of claim 24, wherein each node in a node group comprises a drive electrode coupled to different ones of the drive lines and a sense electrode coupled to a same one of the sense lines, and each node group comprises a node coupled to a same one of the drive lines.

26. A touch sensing device comprising:
 a controller,
 multiple nodes,
 multiple drive lines configured to carry current from the controller to the nodes,

22

multiple sense lines configured to carry current from the multiple nodes to the controller,
 each of the multiple nodes comprising a drive electrode and a sense electrode, the drive electrode and the sense electrode being configured to capacitively couple a drive line and a sense line,

the nodes being arranged in multiple groups,
 each of the multiple groups comprising multiple nodes,
 each node in a group being associated with a sense line that is common to all nodes in the group and a drive line that is not common to any other node in the group,
 one node in each group being associated with a drive line that is common to all groups.

27. A touch sensing device, comprising:
 a mutual capacitive sensing controller having a plurality of distinct drive lines and a plurality of distinct sense lines, a source for driving a current or voltage separately through each drive line, a mutual capacitance sensing circuit that monitors the capacitance at the sensing lines;
 a plurality of independent and spatially distinct mutual capacitive sensing nodes set up in a non two dimensional array, each node including a drive electrode that is spatially separated from a sense electrode, the drive electrode and the sense electrode being configured to capacitively couple a drive line and a sense line,
 the plurality of drive lines configured to carry current from the controller to the nodes,
 the plurality of sense lines configured to carry current from the plurality of nodes to the controller,
 wherein the nodes comprise multiple adjacent node groups, at least a first of the adjacent node groups comprising multiple nodes, each node in a node group being associated with a sense line that is common to all nodes in the group and a drive line that is not common to any other node in the group, one node in each node group being associated with a drive line that is common to all node groups.

28. A touch sensing device comprising:
 a controller,
 multiple nodes,
 multiple drive lines configured to carry current from the controller to the nodes,
 multiple sense lines configured to carry current from the multiple nodes to the controller,
 each of the multiple nodes comprising a drive electrode and a sense electrode, the drive electrode and the sense electrode being configured to capacitively couple a drive line and a sense line,
 the nodes being arranged in multiple adjacent groups,
 each of the multiple adjacent groups comprising multiple nodes,
 each node in a group being associated with a sense line that is common to all nodes in the group and a drive line that is not common to any other node in the group,
 one node in each group being associated with a drive line that is common to all groups.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 9,360,967 B2
APPLICATION NO. : 11/482286
DATED : June 7, 2016
INVENTOR(S) : Steve Hotelling

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page

In the Abstract:

At Line number 5, please delete “though” and insert --through--

In the Claims

At Column 19, Claim number 1, Line number 51, please delete “though” and insert --through--

At Column 20, Claim number 11, Line number 27, after “in” please insert --claim--

At Column 20, Claim number 12, Line number 32, after “in” please insert --claim--

At Column 20, Claim number 13, Line number 34, after “in” please insert --claim--

At Column 20, Claim number 14, Line number 37, after “in” please insert --claim--

At Column 20, Claim number 15, Line number 40, after “in” please insert --claim--

At Column 20, Claim number 16, Line number 43, after “in” please insert --claim--

At Column 20, Claim number 17, Line number 46, after “in” please insert --claim--


At Column 20, Claim number 18, Line number 49, after “in” please insert --claim--

At Column 20, Claim number 19, Line number 51, after “in” please insert --claim--

At Column 20, Claim number 20, Line number 54, after “in” please insert --claim--

At Column 27, Claim number 27, Line number 19, please delete “though” and insert --through--

Signed and Sealed this
Ninth Day of May, 2017



Michelle K. Lee
Director of the United States Patent and Trademark Office