

(12) **United States Patent**
Cao et al.

(10) **Patent No.:** **US 9,748,347 B2**
(45) **Date of Patent:** **Aug. 29, 2017**

(54) **GATE WITH SELF-ALIGNED LEDGED FOR ENHANCEMENT MODE GAN TRANSISTORS**

(58) **Field of Classification Search**
CPC H01L 29/42316; H01L 21/283
(Continued)

(71) Applicant: **Efficient Power Conversion Corporation**, El Segundo, CA (US)

(72) Inventors: **Jianjun Cao**, Torrance, CA (US);
Alexander Lidow, Marina Del Rey, CA (US); **Alana Nakata**, Redondo Beach, CA (US)

(56) **References Cited**
U.S. PATENT DOCUMENTS
6,730,552 B1 5/2004 Abadeer et al.
7,939,880 B2 5/2011 Kang et al.
(Continued)

(73) Assignee: **Efficient Power Conversion Corporation**, El Segundo, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 64 days.

FOREIGN PATENT DOCUMENTS

JP	2011-142182 A	7/2011
TW	201232779	8/2012
TW	201314898	4/2013

(21) Appl. No.: **14/447,069**

Primary Examiner — Jamie C Niesz

(22) Filed: **Jul. 30, 2014**

(74) *Attorney, Agent, or Firm* — Blank Rome LLP

(65) **Prior Publication Data**
US 2016/0035847 A1 Feb. 4, 2016
US 2017/0047414 A9 Feb. 16, 2017

Related U.S. Application Data

(60) Continuation-in-part of application No. 13/838,792, filed on Mar. 15, 2013, now Pat. No. 8,890,168, (Continued)


(51) **Int. Cl.**
H01L 29/66 (2006.01)
H01L 29/423 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01L 29/42316** (2013.01); **H01L 21/283** (2013.01); **H01L 21/28587** (2013.01);
(Continued)

(57) **ABSTRACT**

An enhancement-mode GaN transistor with reduced gate leakage current between a gate contact and a 2DEG region and a method for manufacturing the same. The enhancement-mode GaN transistor including a GaN layer, a barrier layer disposed on the GaN layer with a 2DEG region formed at an interface between the GaN layer and the barrier layer, and source contact and drain contacts disposed on the barrier layer. The GaN transistor further includes a p-type gate material formed above the barrier layer and between the source and drain contacts and a gate metal disposed on the p-type gate material, with wherein the p-type gate material including comprises a pair of self-aligned ledges that extend toward the source contact and drain contact, respectively.

3 Claims, 6 Drawing Sheets

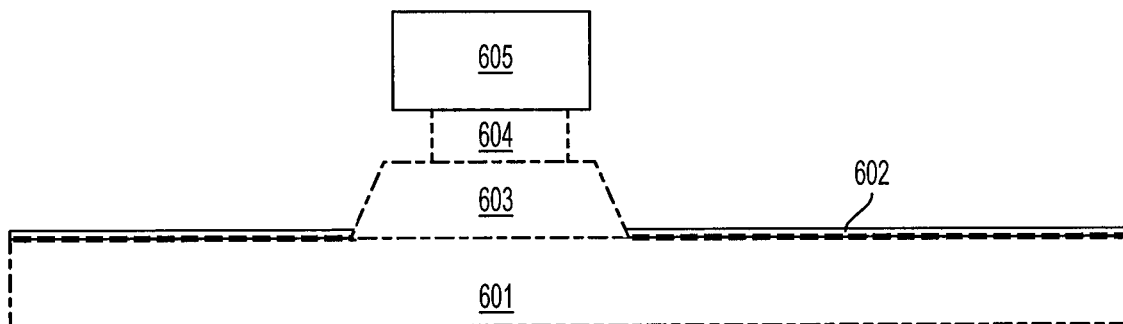

Related U.S. Application Data

which is a division of application No. 12/756,960, filed on Apr. 8, 2010, now Pat. No. 8,404,508.

- (60) Provisional application No. 61/167,777, filed on Apr. 8, 2009, provisional application No. 61/860,976, filed on Aug. 1, 2013.

(51) **Int. Cl.**

H01L 21/283 (2006.01)
H01L 29/778 (2006.01)
H01L 29/10 (2006.01)
H01L 29/20 (2006.01)
H01L 21/285 (2006.01)
H01L 29/205 (2006.01)

(52) **U.S. Cl.**

CPC **H01L 29/1066** (2013.01); **H01L 29/2003** (2013.01); **H01L 29/205** (2013.01); **H01L 29/66462** (2013.01); **H01L 29/7786** (2013.01)

(58) **Field of Classification Search**

USPC 257/194
 See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0119110 A1* 6/2004 Park H01L 21/28273
 257/315
 2006/0157735 A1* 7/2006 Kanamura H01L 29/42316
 257/194
 2006/0273347 A1* 12/2006 Hikita H01L 29/7783
 257/192
 2009/0004872 A1 1/2009 Okamoto
 2009/0072272 A1* 3/2009 Suh H01L 29/1066
 257/194
 2010/0258843 A1* 10/2010 Lidow H01L 29/1066
 257/192
 2013/0168743 A1 7/2013 Dove

* cited by examiner

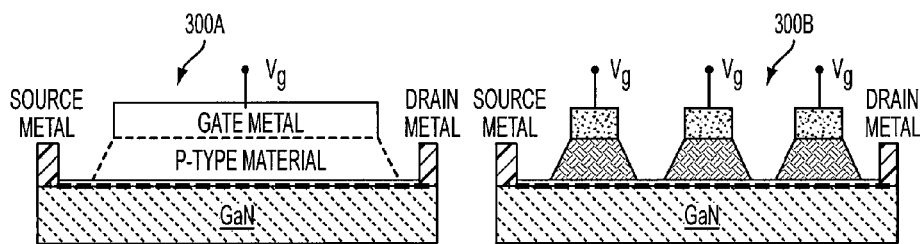


FIG. 3A
PRIOR ART

FIG. 3B
PRIOR ART

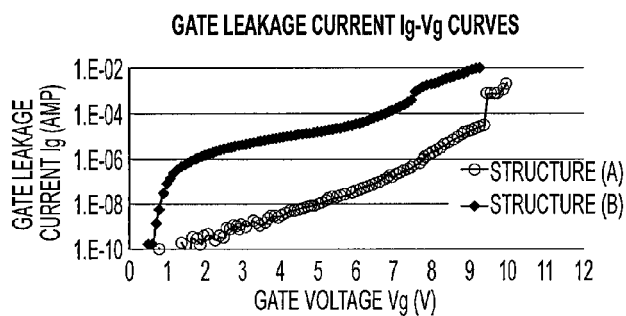


FIG. 4
PRIOR ART

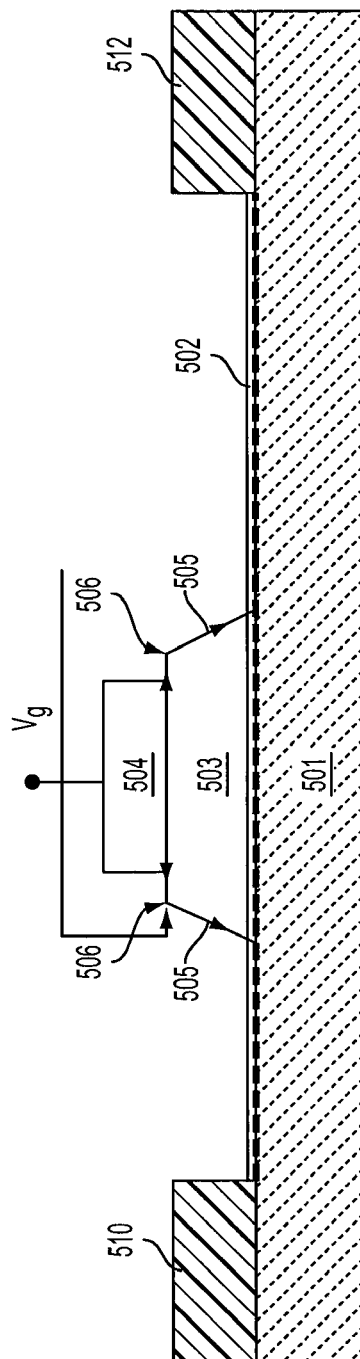


FIG. 5

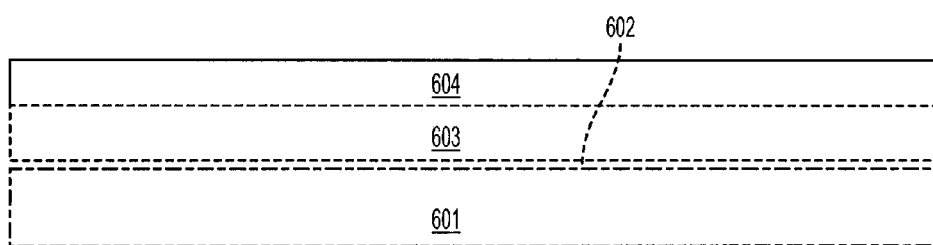


FIG. 6A

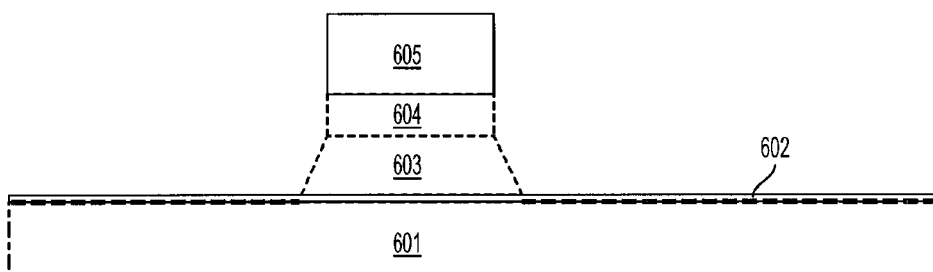


FIG. 6B

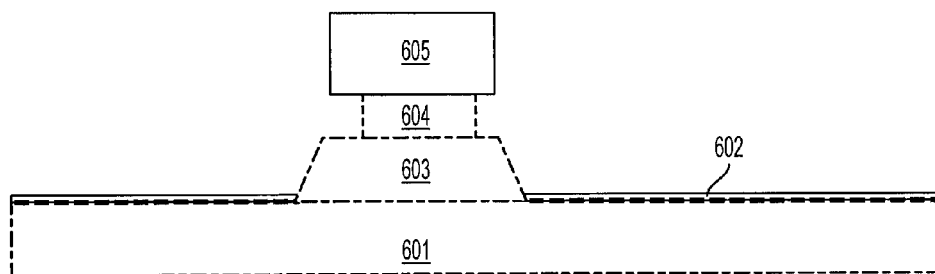


FIG. 6C

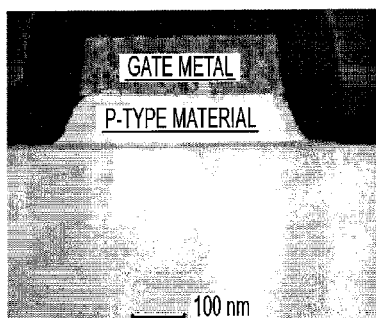


FIG. 7A
PRIOR ART

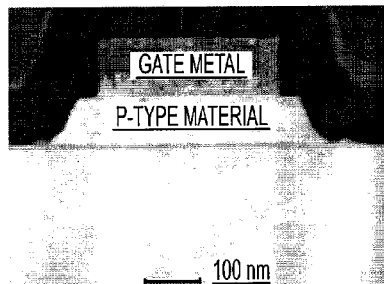


FIG. 7B

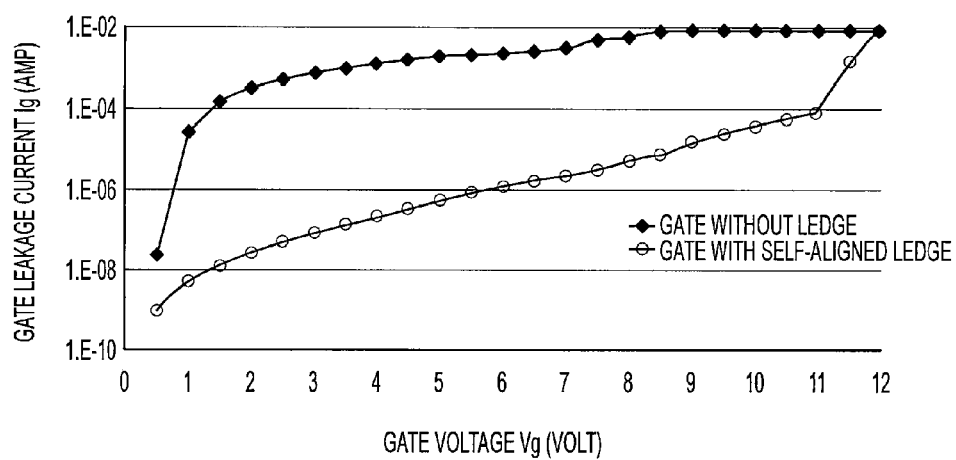


FIG. 8

GATE WITH SELF-ALIGNED LEDGED FOR ENHANCEMENT MODE GAN TRANSISTORS

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of U.S. patent application Ser. No. 13/838,792, filed Mar. 15, 2013, now U.S. Pat. No. 8,890,168, which is a division of U.S. patent application Ser. No. 12/756,960, filed Apr. 8, 2010, now U.S. Pat. No. 8,404,508, which claims the benefit of U.S. Provisional Application No. 61/167,777, filed Apr. 8, 2009. This application also claims the benefit of U.S. Provisional Application No. 61/860,976, filed on Aug. 1, 2013, the entire disclosure of which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to transistors and, more particularly, to an enhancement mode GaN transistor with reduced gate leakage current between the gate and the 2DEG region.

2. Description of the Related Art

GaN semiconductor devices are increasingly desirable because of their ability to switch at high frequency, to carry large current, and to support high voltages. Development of these devices has generally been aimed at high power/high frequency applications. Devices fabricated for these types of applications are based on general device structures that exhibit high electron mobility and are referred to variously as heterojunction field effect transistors (HFET), high electron mobility transistors (HEMT), or modulation doped field effect transistors (MODFET). These types of devices can typically withstand high voltages, e.g., 30V-to-2000 Volts, while operating at high frequencies, e.g., 100 kHz-100 GHz.

A GaN HEMT device includes a nitride semiconductor with at least two nitride layers. Different materials formed on the semiconductor or on a buffer layer cause the layers to have different band gaps. The different material in the adjacent nitride layers also causes polarization, which contributes to a conductive two dimensional electron gas (2DEG) region near the junction of the two layers, specifically in the layer with the narrower band gap.

The nitride layers that cause polarization typically include a barrier layer of AlGaIn adjacent to a layer of GaN to include the 2DEG, which allows charge to flow through the device. This barrier layer may be doped or undoped. Because the 2DEG region exists under the gate at zero gate bias, most nitride devices are normally on, or depletion mode devices. If the 2DEG region is depleted (i.e., removed) below the gate at zero applied gate bias, the device can be an enhancement mode device. Enhancement mode devices are normally off and are desirable because of the added safety they provide and because they are easier to control with simple, low cost drive circuits. An enhancement mode device requires a positive bias applied at the gate in order to conduct current.

FIG. 1 illustrates a conventional schematic enhancement-mode GaN transistor. As shown, a p-type material **101** is used as the gate **103**. At 0V bias, the p-type material **101** depletes the 2DEG **102** under the gate **103**, and the device is in an OFF state. The transistor is turned ON by applying a positive voltage to the gate **103**. FIG. 2 illustrates a schematic diagram of two gate leakage current paths **201**, **202** of a conventional enhancement-mode GaN transistor. The first gate leakage current path **201** flows along the

sidewall of the p-type gate material **101** and the second gate leakage current path **202** flows through the bulk of the p-type gate material **101**.

FIGS. **3A** and **3B** illustrate schematic diagrams of two test structures **300A**, **300B** designed to determine the types of structures for an enhancement-mode GaN transistor that may result in lower gate leakage current. In particular, the transistor structure **300A** illustrated in FIG. **3A** is designed with a larger gate surface area and fewer gate edges when compared to the transistor structure **300B** illustrated in FIG. **3B**. In this example, the transistor structure **300A** has a gate surface area of 140,000 μm^2 and 2,500 μm edges, while the transistor structure **300B** has a gate surface area of 84,000 μm^2 and 247,000 μm edges.

FIG. **4** illustrates a graphical comparison of the gate leakage currents of the transistor structures **300A** and **300B** illustrated in FIG. **3A** and **3B**, respectively. As shown, structure **300B** has a higher gate leakage current than structure **300A**, suggesting that the gate leakage current is predominately along the gate edge, i.e., path **201** illustrated in FIG. **2**.

Accordingly, it is an object of the present invention is to provide an enhancement-mode GaN transistor with reduced gate leakage current between the gate **103** and the 2DEG **102**.

SUMMARY OF THE INVENTION

An enhancement-mode GaN transistor and method for manufacturing the same is disclosed herein with the enhancement-mode GaN transistor having reduced gate leakage current between a gate contact and a 2DEG region and a method for manufacturing the same. The enhancement-mode GaN transistor including a GaN layer, a barrier layer disposed on the GaN layer with a 2DEG region formed at an interface between the GaN layer and the barrier layer, and source contact and drain contacts disposed on the barrier layer. The GaN transistor further includes a p-type gate material formed above the barrier layer and between the source and drain contacts and a gate metal disposed on the p-type gate material, with wherein the p-type gate material including comprises a pair of self-aligned ledges that extend toward the source contact and drain contact, respectively.

A method for manufacturing the enhancement-mode GaN transistor disclosed herein includes the steps of forming a GaN layer; forming a barrier layer on the GaN layer; depositing a p-type gate material on the barrier layer; depositing a gate metal on the p-type gate material; forming a photoresist over the gate metal; etching the gate metal and the p-type gate material; and isotropically etching the gate metal to form pair of ledges on the p-type gate material below the gate metal.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present disclosure will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. **1** illustrates a schematic of a conventional enhancement-mode GaN transistor.

FIG. **2** illustrates a schematic diagram of two gate leakage current paths of a conventional enhancement-mode GaN transistor.

FIG. **3A** illustrates a schematic diagram of test structure of an enhancement-mode GaN transistor.

3

FIG. 3B illustrates a schematic diagram of test structure of another enhancement-mode GaN transistor.

FIG. 4 illustrate a graphical comparison of the gate leakage currents of structures shown in FIGS. 3A and 3B.

FIG. 5 illustrates a schematic diagram of a transistor device according to an exemplary embodiment of the present invention.

FIGS. 6A-6C illustrates a fabrication process to manufacture a gate of a transistor device with self-aligned ledges according to an exemplary embodiment.

FIG. 7A illustrates a cross-sectional image of a conventional gate structure without a ledge.

FIG. 7B illustrates a cross-sectional image of a gate structure with a self-aligned ledge according to an exemplary embodiment.

FIG. 8 illustrates a graphical comparison of gate leakage current of the gate structures illustrated in FIGS. 7A and 7B.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

In the following detailed description, reference is made to certain embodiments. These embodiments are described with sufficient detail to enable those skilled in the art to practice them. It is to be understood that other embodiments may be employed and that various structural, logical, and electrical changes may be made. The combinations of features disclosed in the following detailed description may not be necessary to practice the teachings in the broadest sense, and are instead taught merely to describe particularly representative examples of the present teachings.

FIG. 5 illustrates a schematic diagram of a transistor device according to an exemplary embodiment of the present invention. As shown, the transistor includes a source metal **510** (i.e., source contact) and a drain metal **512** (i.e., drain contact) with a gate contact disposed between the source and drain metals. In particular, a GaN base layer **501** is provided with a barrier layer **502** formed over the GaN base layer **501** and a two dimensional electron gas (2DEG) region formed at the interface between the GaN base layer and the barrier layer **502**. In the exemplary embodiment, the barrier layer **502** is formed from aluminum gallium nitride (AlGaIn).

As further shown, the gate contact includes a p-type gate material **503** formed on the barrier layer **502** and includes ledges **506** that are created by a self-aligned process at the top corners of the p-type gate material **503** as will be discussed in detail below. A gate metal **504** is disposed over the p-type gate material **503**. As shown, the gate metal **504** has a smaller width (i.e., the width between sidewalls of the gate metal **504**) than the width of the p-type gate material **503** (i.e., the width between side surfaces of the p-type gate material **503**), effectively forming the pair of horizontal ledges **506** on each side of the gate metal **504**. The pair of ledges **506** that extend past sidewalls of the gate metal **504** have equal or substantially equal widths, i.e., the respective ledges are symmetric from the respective sidewalls of the gate metal to the side surfaces of the p-type gate material, which is due to the self-aligned manufacturing process.

The primary benefits of using a self-aligned manufacturing process is to: (1) enable the creation of a p-type gate with a minimum critical dimension ("CD"), (2) lower processing cost because a second mask is not required, and (3) create ledges **506** that are symmetric to the gate metal **504** disposed on the p-type gate material. As indicated by the arrows (denoted by reference numbers **505**) shown on ledges **506** and the side surfaces of the p-type gate material **503**, when

4

a positive voltage V_g is applied to the gate metal **504**, the gate current path **505** first travels horizontally along the upper edge of the p-type gate material **503** and, once it reaches the ledges **506**, the current path **505** follows the diagonal path along the edge of the p-type gate material **503**. This structure results in reduced gate leakage current as discussed below with respect to FIG. 8.

FIGS. 6A-6C illustrate a manufacturing process for fabricating a gate with self-aligned ledges in accordance with an exemplary embodiment of the present invention. As shown in FIG. 6A, the base structure of the device is first formed with a base layer **601** of gallium nitride (GaN), a barrier layer **602** of aluminum gallium nitride (AlGaIn) formed on the GaN layer **601**, and a layer of p-type gate material **603** formed on the barrier layer **602**, over which the gate metal **604** is deposited.

Next, as shown in FIG. 6B, a photoresist **605** is deposited and the gate metal **604** is then etched. The p-type gate material **603** is also etched in a manner that results in the gate structure depicted in FIG. 6B. As shown in FIG. 6C, the gate metal **604** is then etched isotropically, which results in the gate metal have a width less than the planar upper surface of the p-type gate material **603**. This second etching step results in the formation of the ledges **506** of the p-type gate material **603**.

Finally, the manufacturing process includes a step of removing the photoresist **605**, which is not shown, and results in the gate with self-aligned ledge shown in FIG. 5. It should also be appreciated that contact metals for the drain and source contacts can be separately deposited using conventional fabrication techniques, but their formation will not be described herein so as to not unnecessarily obscure the aspects of the invention.

FIGS. 7A-7B illustrate a transmission electron microscopy ("TEM") image of a cross-sectional view of a conventional transistor gate and an x-ray of a cross-sectional view of a gate with a self-aligned ledge according to the exemplary embodiment disclosed herein. FIG. 8 illustrates a graph comparing the gate leakage current of the present invention (shown in FIG. 7B) with the gate leakage current of a conventional transistor (shown in FIG. 7A). As can be clearly seen in FIG. 8, the gate with self-aligned ledges has significantly lower gate leakage current than conventional gates without ledges when the transistor device is in the ON state.

Finally, it is noted that the self-aligned process illustrated in FIGS. 6A-6C is vastly superior to forming gate ledges using separate masks. In the process of using separate masks, a photoresist mask is applied to the unetched structure after the p-type gate material is deposited on the barrier layer of the device. In this instance, the first mask is used to pattern and etch the gate metal to a minimum CD. A second mask is then used to pattern and etch the p-type material with a wider CD than the gate metal. One significant disadvantage of this two mask process is the possibility of misalignment between the gate metal and the p-type gate material.

The above description and drawings are only to be considered illustrative of specific embodiments, which achieve the features and advantages described herein. Modifications and substitutions to specific process conditions can be made. Accordingly, the embodiments of the invention are not considered as being limited by the foregoing description and drawings.

What is claimed:

1. A method for manufacturing an enhancement-mode GaN transistor, the method comprising:

forming a GaN layer;
forming a barrier layer on the GaN layer;
depositing source and drain contacts on the barrier layer;
depositing a p-type gate material on the barrier layer;
depositing a gate metal on the p-type gate material; 5
forming a photoresist over the gate metal;
etching the gate metal and the p-type gate material,
wherein the step of etching the p-type gate material
comprises forming side surfaces of the p-type gate
material that extend horizontally towards the source 10
and drain contacts, respectively, and contact the barrier
layer; and
etching the gate metal to form a pair of ledges on the
p-type gate material below the gate metal.

2. The method according to claim 1, wherein the step of 15
etching the gate metal comprises etching the gate metal to
reduce a width of the gate metal, such that the width of the
gate metal is less than a width of the p-type gate material.

3. The method according to claim 1, wherein the pair of
ledges of the p-type gate material are self-aligned. 20

* * * * *