




TYPICAL INSTALLATION FOR Z150-C-R PROM DECK DRAIN IN A CONCRETE DECK

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

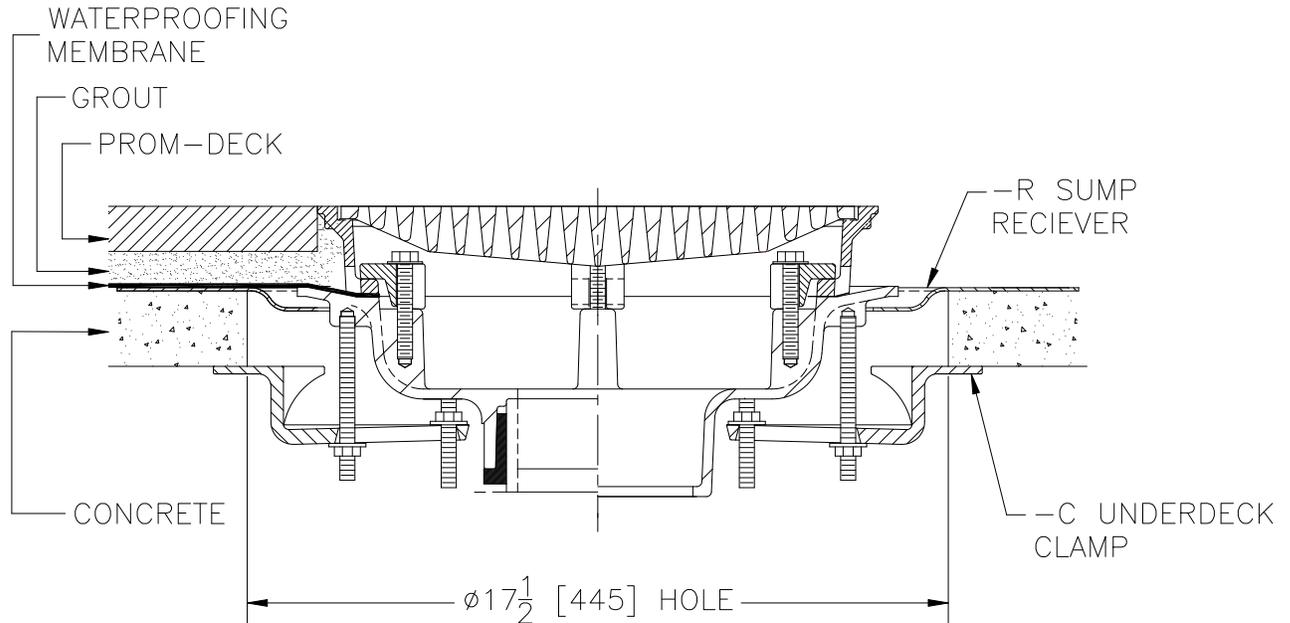

Z150-C-R PROM DECK DRAIN INSTALLED IN A CONCRETE DECK

Prom deck drain installed in a concrete deck. 14 [356] square drain is illustrated with underdeck clamp (-C), sump receiver (-R) and heavy-duty heelproof grate. 17 1/2 [445] dia. clearance hole required for installation. Other Prom Deck drains include the 11 [279] Z154 and 8 [203] Z158. Both of these drains are furnished with a light-duty heel proof grate.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov
⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov