

# **Mariposa®**

5.5' Whirlpool Bath K-1224-LH



### **Features**

- Single-speed whirlpool offers performance and value, with 5 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Hourglass shape adds style and elegance to your bathroom.
- Built-in heater.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface
- Left-hand drain.

#### Material

Acrylic

# **Hydrotherapy**

Whirlpool

#### Installation

Three-wall alcove.

## **Additional Hydrotherapy Options**

- Soaking Bath 1229-L
- Soaking Bath + Bask heated surface 1229-LW
- BubbleMassage air bath 1224-GLF
- VibrAcoustic 1224-VBL
- VibrAcoustic + Bask heated surface 1224-VBLW
- Whirlpool 1224-L
- Whirlpool + heater 1224-LH
- Whirlpool + Bask heated surface 1224-LW

#### **Recommended Products/Accessories**

K-1234 Removable Apron
K-7161-AF Bath Drain
K-24916 Wireless Music Kit
K-1601 Bath/Whirlpool Footstop
K-7213 27" Cable Bath Drain
K-7214 27" Cable Bath Drain
K-37380 30" Rough-in Cable Bath Drain
K-37383 30" Rough-in Cable Bath Drain
K-7166-AF Bath Drain



ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 Greenguard UL 2818 - Gold

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar





# **Mariposa®**

# 5.5' Whirlpool Bath

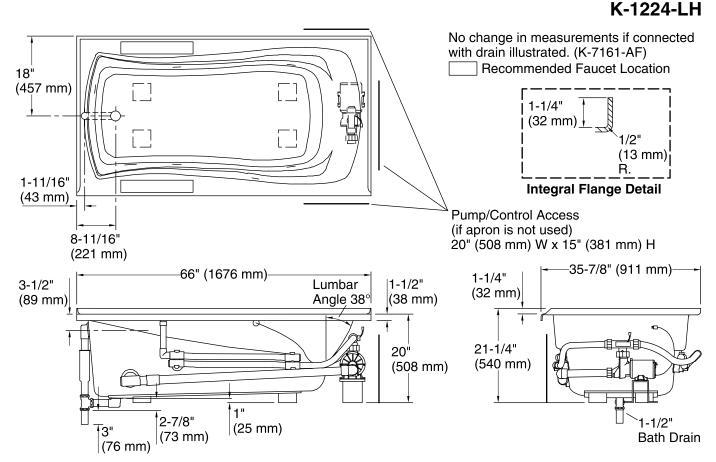

## **Required Electrical Service**

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz Heater: 120 V, 15 A, 60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Left

Basin area, bottom: 48" x 24" (1219 mm x 610 mm) Basin area, top: 59" x 30" (1499 mm x 762 mm)

Weight: 115 lbs (52.2 kg)
Minimum floor load: 43 lbs/ft² (209.9 kg/m²)

Water depth: 14" (356 mm)
Water capacity: 67 gal (253.6 L)

Electrical component Pump: 120 V, 7.5 A, 60 Hz

rating: Heater: 120 V, 12.5 A, 60 Hz, 1500 W

Pump speed: Single

Minimum flat for door: 1-15/16" (49 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

