

**Features**

- Reduces arsenic, fluoride, lead, TDS, bacteria, virus and more in drinking water.
- Filter head automatically turns off water supply when cartridge is removed.
- Replacing RO membrane every 12 months keeps filtration system performing effectively.
- Postage-paid recycling program for used cartridges to reduce solid waste to landfills.
- For cold water use only.

**Material**

- High-impact plastic construction.

**Installation**

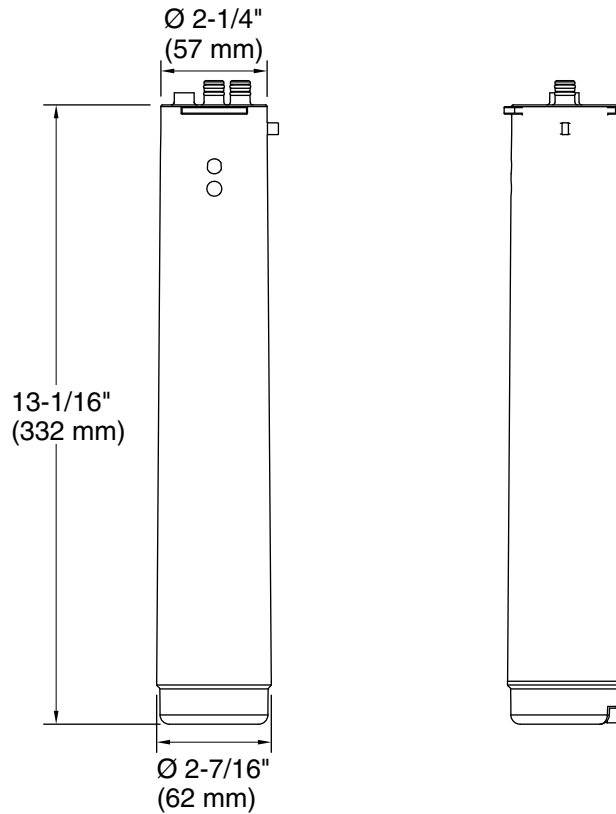
- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.

**Codes/Standards**

CSA B483.1  
NSF/ANSI 58  
NSF Protocol P231

**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

**Technical Information**

All product dimensions are nominal.

Drain included: No

**Notes**

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 12 months.

Application guideline/water supply parameters:  
Water Pressure: 40-100 psi (276-689 kPa) Water  
Temperature: 40-100°F (4.4-37.8°C).