

Features

- For use with the K-29638 Aquifer®+ water purification system.
- Hollow fiber membrane technology reduces bacteria and virus in the water.
- 0.85 gpm maximum flow rate at 60 psi.
- Filter head automatically turns off the water supply when cartridge is removed.
- Postage-paid recycling program for used cartridges to reduce solid waste to landfills.
- Also sold together with K-77687 as K-29651 Aquifer®+ replacement filter cartridge two-pack.

Material

- High-impact plastic construction.

Installation

- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.
- For cold water use only.





Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF/ANSI 53
NSF/ANSI 401
NSF Protocol P231
NSF Protocol P473

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

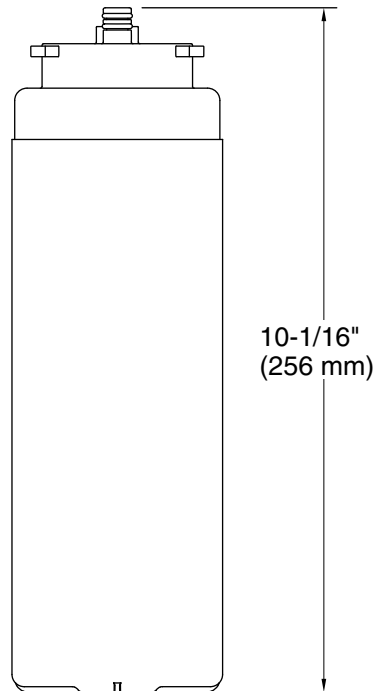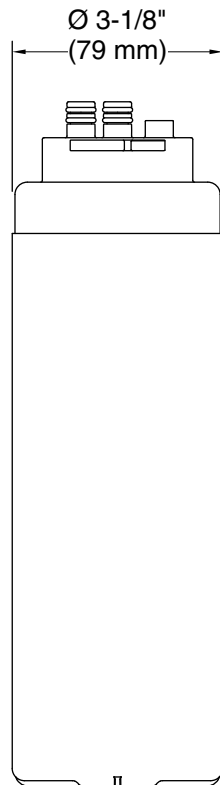

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 0.85 gal/min (3.2 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

Fixture pressure max 120 psi (827.4 kPa)
(static):

Pressure and Supply Requirements

Fixture pressure min 40 psi (275.8 kPa)
(static):

Fixture Supply Requirements

Min static pressure: 40 psi (275.8 kPa)

Max static pressure: 120 psi (827.4 kPa)

Notes

Install this product according to the installation instructions.

To prevent the risk of property damage, protect from freezing.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:
Water Pressure: 40-120 psi (276-827 kPa) Water
Temperature: 33-100°F (0.5-37.8°C) Capacity:
389 gal (1,472 L)