



see what Delta can do™

77538




INSTALLATION INSTRUCTIONS FOR ADA WALL SLIDE BAR & HAND SHOWER SYSTEM

Models
52001, 52002, 52003 & 52008
Series


Parts and Hardware included:

- 1 - Wall Slide Bar with adjustable ADA Slide Mechanism
- 1 - Full Spray Hand Shower with Rub Clean and Dual Check Valves
- 1 - 60" UltraFlex® Hose or 69" Double Spiral Hose
- 1 - Set of Mounting Hardware
Six (6) #10 x 2-1/2" Wood Screws

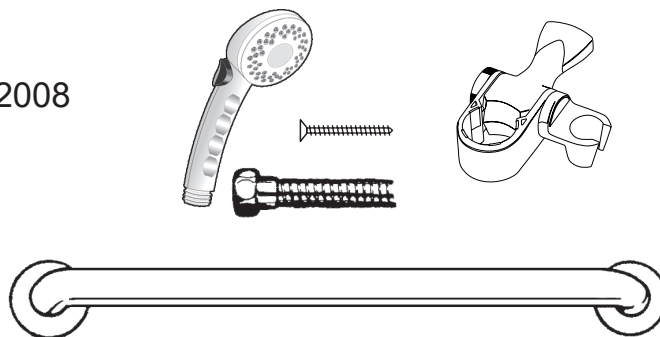

Tools Needed for Installation:

- Slot-headed screwdriver
- Electric drill
- 5/32" drill bit
- Soft cloth
- Wrench or pliers



⚠ WARNING

SLIDE BAR MAY NOT PROVIDE DESIGNED AMOUNT OF SUPPORT UNLESS THESE INSTALLATION INSTRUCTIONS ARE STRICTLY FOLLOWED.

For proper installation, both ends of Slide Bar **MUST** be installed into a wall stud. For solid support, at least two (2) of the three (3) screws on each end of the Slide Bar **MUST** go through the wallboard or tile and be tightly secured into the wall stud. Given standard stud sizes, only two (2) of the three (3) screws may screw into the wall stud.

Slide Bar may be installed vertically, horizontally or at an angle, so long as at least two (2) of the three (3) mounting screws on each end of the Slide Bar are secured into a wall stud. Locate the wall studs behind the wall before beginning installation (a stud finder can be obtained from a hardware store).

⚠ WARNING

THE FOLLOWING STEPS REQUIRE DRILLING INTO THE WALL.

When drilling into the wall, exercise care to avoid any electrical wiring or plumbing that may be located behind the wall. Damaged electrical wiring can cause electrical shock and/or fire. Since older homes do not always fall in line with current housing codes and requirements, know where internal wall wiring is located so that no wires will interfere with your installation.

PROPER INSTALLATION IS EXTREMELY IMPORTANT. IF IN DOUBT, INSTALLATION SHOULD BE DONE BY A QUALIFIED PROFESSIONAL.

USING SLIDE BAR:

1. Read, understand and follow the information in the SAFETY WARNINGS section of this instruction Sheet. Delta Faucet shall have no liability for any damage or injury caused by improper installation or use of this Slide Bar.
2. Grasp the Slide Bar when exiting or entering the bathtub or shower.
3. Use **EXTREME** caution on wet tub or floor surfaces.
4. **DO NOT** put entire weight on Slide Bar. Slide Bar is rated for persons weighing up to **300 pounds** when properly installed.
5. **DO NOT** stand, sit or step on Slide Bar. **DO NOT** use Slide Bar as a step or platform to reach area above the tub. **Use the bar for assistance ONLY.**

CARE AND MAINTENANCE:


1. Use of mild soap and water or a non-abrasive cleaner is recommended for cleaning.
2. Periodically inspect the Slide Bar for damage or looseness. **DO NOT** use if any damage or looseness exists. Contact your authorized dealer for assistance.
3. **SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

1. BEFORE INSTALLING SLIDE BAR:


1. Remove the Slide Bar and parts from the package. If concealed mount Slide Bar is used, move cover plates away from mounting holes.
2. Determine where you want to install Slide Bar.
3. Place Slide Bar on wall at desired position. If mounting horizontally or vertically, check that the Slide Bar is level.
4. With a pencil, mark the centers of the mounting hole positions on one end. These are the points where you will later drill pilot holes for putting in the screws.
5. Repeat Step 4 for the other end of the Slide Bar.

TO INSTALL INTO WOOD WALL STUDS:

6. Put on safety glasses before starting.
7. Use the 3/8" power drill and 5/32" drill bit to drill all holes into the wall and wood wall studs at the marked positions. **NOTE:** If installing Slide Bar over ceramic tiles, the 1/4" carbide tip drill bit will be needed for drilling through the tile, in order to prevent damage to the tiles. Drill pilot holes through the tiles by using a 1/4" carbide tip drill bit. Once a hole has been drilled through the ceramic tiles, use the 5/32" drill bit to drill a pilot hole in the wood wall stud itself.
8. Place Slide Bar on wall, aligning mounting holes with the holes in the wall.
9. Insert the wood screws provided into one end of the Slide Bar. Screw into wall and wall stud (**HAND TIGHTEN ONLY**).
10. Repeat **Step 4** for opposite end of the Slide Bar.
11. **Securely** tighten all mounting wood screws with a screwdriver.
12. If concealed mount Slide Bar is used, move cover plates over mounting holes and firmly press against the wall.

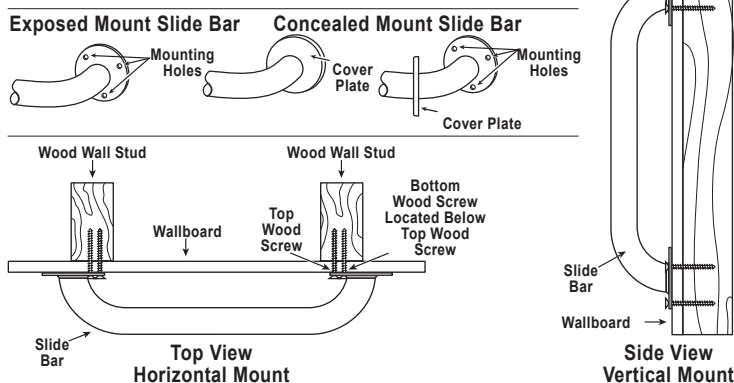


2. Prior to snapping the two cover flanges in place, make certain the Wall Slide Bar is installed securely. Then snap the two cover flanges into place, pressing tightly so the three catches on each wall flange lock into position.





3. Install Mount/Slide Bracket. Reference Mount/Slide Bracket installation (separate Sheet).



4. For installation with an existing shower head, remove the shower head by turning counter-clockwise with adjustable wrench or pliers. Be careful not to unscrew the shower arm - hold the shower arm secure while unscrewing the shower head. **Note:** If the existing shower arm has an integral ball connector, replace it with a standard, 1/2" threaded shower arm.





5. Wrap the shower arm threads with plumber tape before installing into plumbing fitting. Hand tighten hose end to shower arm (or water supply) by turning clockwise. Then fully tighten with an adjustable wrench or pliers. Use a soft cloth between the jaws of the tool and hose connector to protect the finish.




6. Carefully tighten other end of hose to the hand shower. Place the hose from the hand shower into the holder (or bracket) section of the arm mount and slip down. **Do not force.** The hose takes a "natural drape" after warm water has been run through it.

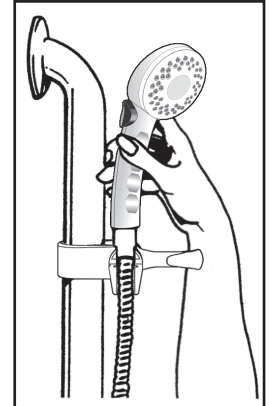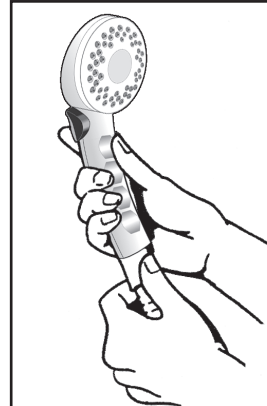

7. The arm mount unit (for the hand shower) of the Wall Slide Bar can be adjusted (7A) by pushing up or down on the extended Paddle to move the unit up or down (on vertical or angled Slide Bar installations) and left or right (on horizontal installation). After positioning as desired, flip the Paddle into the straight (locked in) position. In addition, (7B) the arm mount can be adjusted by lightly tapping on the base of the arm mount unit.

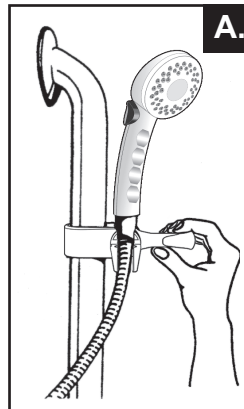


8. The arm mount unit also can be twisted clockwise or counter-clockwise for desired positioning for the hand shower.

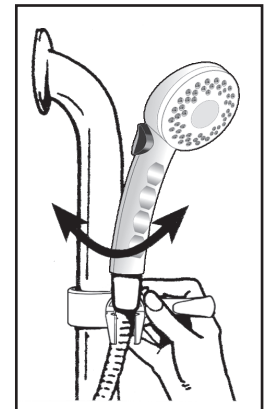


9. Additional adjustments of the arm mount unit is available with the holder section of the arm mount unit. This holder can be turned clockwise or counter-clockwise for desired mounting of the hand shower.

Note: This "water saver" shower is designed to limit water usage to 2.5 gallons per minute maximum. A flow control disc is pre-installed in the end of the handle where the handle attaches to the hose. The hand shower also contains dual check valves for back-flow protection.

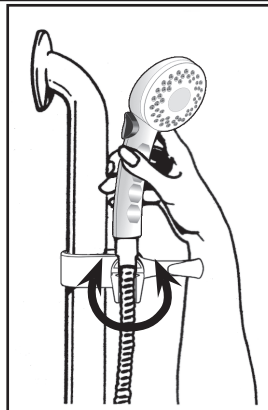

10. Do not force the handle in or out of the arm mount unit. The hand shower is easily removed from the arm mount by lifting the handle upward.

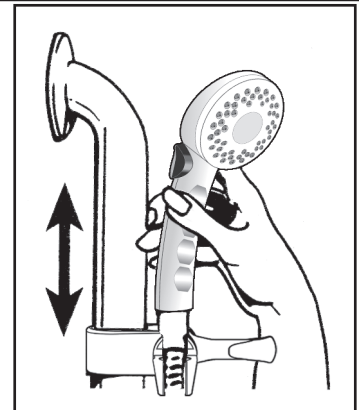

Cleaning Instructions

To clean the hand shower face plate: Remove the shower handle from the hose. Soak the hand shower in a 50/50 solution of white vinegar and water for 30 minutes to dissolve mineral buildup. Reassemble; do not overtighten the handle to the hose. Turn on the

shower to wash the impurities out of the hand shower.

To clean the Wall Slide Bar or Arm Mount Unit: Wipe with soft, damp cloth - do not use detergent or cleansers that may be harmful to the finish.

Limited Warranty on Delta® Faucets

Parts and Finish: All parts (other than electronic parts and batteries) and finishes of Delta® faucets purchased from authorized Delta sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship for as long as the original consumer purchaser owns the home in which the faucet was first installed. For commercial purchasers, (a) the warranty period is ten (10) years for multi-family residential applications and (b) five (5) years for all other commercial applications, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.). For purposes of this warranty, the term "multi-family residential application" refers to the purchase of the faucet from an authorized Delta seller by a purchaser who owns but does not live in the residential dwelling in which the faucet is initially installed, such as in a rented or leased single unit or multi-unit detached home (duplex or townhome), or a condominium, apartment building or community living center. The following installations are not considered multi-family residential applications, are excluded from the 10-year warranty and are subject to the 5-year warranty: industrial, institutional or other business premises, such as a dormitory, hospitality premises (hotel, motel or extended stay location), airport, educational facility, long- or short-term healthcare facility (hospital, rehabilitation center, nursing, assisted or staged-care living unit), public space or common area.

Parts and Finish for Delta® Recertified Faucets: Delta Faucet Company offers for sale online Delta® Recertified faucets. Delta® Recertified faucets only include faucets that have been certified as such by Delta Faucet Company. All parts (other than electronic parts and batteries) and finishes of these Delta® Recertified faucets are warranted to the original consumer purchaser to be free from defects in material and workmanship for ten (10) years from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.). For commercial purchasers, the warranty period is one (1) year from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).

Electronic Parts: Electronic parts (other than batteries), if any, of Delta® faucets purchased from deltafaucet.com or authorized Delta sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship for five (5) years from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.) or, for commercial purchasers, for one (1) year from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.

What We Will Do: Delta Faucet Company will repair or replace, free of charge, during the applicable warranty period (as described above), any part or finish that proves defective in material and/or workmanship under normal installation, use and service. Delta Faucet Company may, in its sole discretion, use new, refurbished or recertified parts or products for such repair or replacement. If repair or replacement is not practical, Delta Faucet Company may elect to refund the purchase price in exchange for the return of the product. **These are your exclusive remedies.**

What Is Not Covered: Because Delta Faucet Company is unable to control the quality of Delta products sold by unauthorized sellers, unless otherwise prohibited by law, this warranty does not cover Delta products purchased from unauthorized sellers.

Any labor charges incurred by the purchaser to repair, replace, install or remove this product are not covered by this warranty. Delta Faucet Company shall not be liable for any damage to the faucet resulting from reasonable wear and tear, outdoor use, misuse (including use of the product for an unintended application), freezing water, abuse, neglect or improper or incorrectly performed installation, maintenance or repair, including failure to follow the applicable care and cleaning instructions. Delta Faucet Company recommends using a professional plumber for all installation and repair of faucets. We also recommend that you use only genuine Delta® replacement parts.

What You Must Do To Obtain Warranty Service or Replacement Parts: A warranty claim may be made and replacement parts may be obtained by calling 1 800 345 DELTA (3358) or by contacting us by mail or online as follows (please include your model number, date of original purchase and documentation of the date of receipt of the product by the original purchaser or their authorized representative (installation contractor, etc.)):

In the United States and Mexico:

Delta Faucet Company
55 E. 111th Street
Indianapolis, IN 46280
Attention: Warranty Service
www.deltafaucet.com/service-parts/contact-us

In Canada:

Masco Canada Limited, Plumbing Group
Technical Service Centre
350 South Edgeware Road
St. Thomas, Ontario, Canada N5P 4L1
Attention: Customer Service
<http://www.deltafaucet.ca/customersupport/assistance.html>

Proof of purchase (original sales receipt showing purchase date) and documentation of the date of receipt of the product by the original purchaser or their authorized representative (installation contractor, etc.) from the original purchaser must be made available to Delta Faucet Company for all warranty claims unless the purchaser has registered the product with Delta Faucet Company or the product is a Delta® Recertified product purchased from deltafaucet.com. This warranty applies only to Delta® faucets manufactured after January 1, 2019 and installed in the United States of America, Canada and Mexico.

Limitation on Duration of Implied Warranties: Please note that some states/provinces (including Quebec) do not allow limitations on how long an implied warranty lasts, so the below limitations may not apply to you. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ANY IMPLIED WARRANTY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE, IS LIMITED TO THE STATUTORY PERIOD OR THE DURATION OF THIS WARRANTY, WHICHEVER IS SHORTER.

Limitation of Special, Incidental or Consequential Damages: Please note that some states/provinces (including Quebec) do not allow the exclusion or limitation of special, incidental or consequential damages, so the below limitations and exclusions may not apply to you. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS WARRANTY DOES NOT COVER, AND DELTA FAUCET COMPANY SHALL NOT BE LIABLE FOR, ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LABOR CHARGES TO REPAIR, REPLACE, INSTALL OR REMOVE THIS PRODUCT), WHETHER ARISING OUT OF BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, BREACH OF CONTRACT, TORT, OR OTHERWISE. DELTA FAUCET COMPANY SHALL NOT BE LIABLE FOR ANY DAMAGE TO THE FAUCET RESULTING FROM REASONABLE WEAR AND TEAR, OUTDOOR USE, MISUSE (INCLUDING USE OF THE PRODUCT FOR AN UNINTENDED APPLICATION), FREEZING WATER, ABUSE, NEGLIGENCE OR IMPROPER OR INCORRECTLY PERFORMED INSTALLATION, MAINTENANCE OR REPAIR, INCLUDING FAILURE TO FOLLOW THE APPLICABLE INSTALLATION, CARE AND CLEANING INSTRUCTIONS. Notice to residents of the State of New Jersey: The provisions of this warranty, including its limitations, are intended to apply to the fullest extent permitted by the laws of the State of New Jersey.

Additional Rights: This warranty gives you specific legal rights, and you may also have other rights which vary from state/province to state/province. This is Delta Faucet Company's exclusive written warranty and the warranty is not transferable.

If you have any questions or concerns regarding our warranty, please contact us as provided above or view our Warranty FAQs at www.deltafaucet.com.

© 2023 Masco Corporation of Indiana