

# SharkBite Max™

## Angle Stop Valve with Braided Supply Line

Used to control the flow of water to household plumbing fixtures and appliances. Ideal for maintenance and repair without having to shut-off water to the entire home.

### Applications

Toilet and Faucet Connections


### Specifications Data

| Materials  |                           |
|------------|---------------------------|
| Screw      | Steel                     |
| Handle     | Zinc                      |
| Spindle    | DZR LF Brass <sup>1</sup> |
| O-ring     | EPDM                      |
| Seat       | PTFE                      |
| Ball       | DZR LF Brass <sup>1</sup> |
| Body       | DZR LF Brass <sup>1</sup> |
| Cover      | ABS                       |
| Olive      | Copper                    |
| Cap        | DZR LF Brass <sup>1</sup> |
| End Plug   | DZR Brass                 |
| Braiding   | SST                       |
| Hose Liner | PVC                       |

<sup>1</sup> Lead Free for all models, surfaces that are in contact with consumable water contain less than 0.25% lead by weight.

### Certifications & Listings

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61, Q ≤ 0.5  
NSF/ANSI/CAN 372

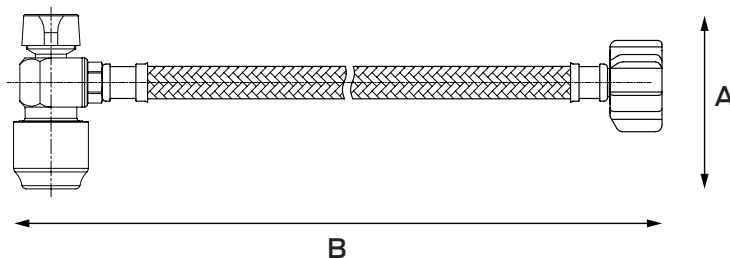

| Dimensions (Inches) |                                    |      |       |
|---------------------|------------------------------------|------|-------|
| Part #              | Size                               | A    | B     |
| UR24657             | 1/2 in. PTC X 1/2 in. FIP x 20 in. | 2.65 | 20.55 |
| UR24656             | 1/2 in. PTC X 7/8 in. BC x 12 in.  | 2.65 | 12.56 |

| Pipe Insertion Depth |                 |
|----------------------|-----------------|
| Fitting Size         | Insertion Depth |
| 1/2 in.              | 0.95 in.        |

| Product Submittal |  |
|-------------------|--|
| Name              |  |
| Date              |  |
| Architect/Owner   |  |
| Contractor        |  |
| Tag               |  |
| Notes             |  |