

## Features

- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Single-function showerhead with 48 translucent nozzles
- 4-1/2" (114 mm) diameter sprayface
- 1.75 gpm (6.6 lpm) maximum flow rate
- Complements Loure faucets and accessories

## Material

- KOHLER finishes resist corrosion and tarnishing

## Technology

- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

## Installation

- Wall-mount
- Shower arm and flange sold separately

## Recommended Products/Accessories

K-14679 Shower Arm and Flange



## Codes/Standards





ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description              |
|---|------|--------------------------|
|  | CP   | Polished Chrome          |
|  | SN   | Vibrant® Polished Nickel |
|  | BN   | Vibrant® Brushed Nickel  |
|  | BL   | Matte Black              |

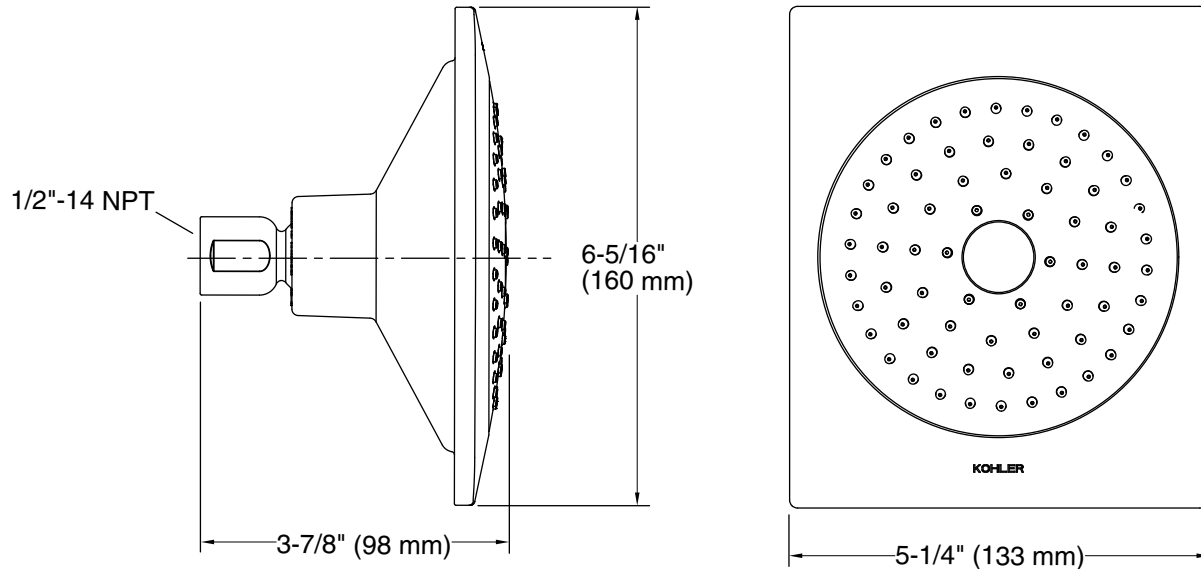

## Technical Information

All product dimensions are nominal.

### Spout:

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

## Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.