

### Features

- Showerhead features contemporary design
- 1.75 gpm (6.6 lpm) showerhead flow rate
- Spray nozzles cover full area of 3-9/16" (90 mm) sprayhead
- Full coverage spray produces an encompassing spray ideal for everyday use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

### Material

- KOHLER finishes resist corrosion and tarnishing

### Installation

- Shower arm and flange sold separately
- Wall-mount
- 1/2" -14 NPT connection

### Recommended Products/Accessories

K-7395 Shower Arm and Flange  
K-7397 Shower Arm and Flange



### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
NOM Standards  
NOM 008-CONAGUA



### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description                    |
|-------------------------------------------------------------------------------------|------|--------------------------------|
|  | CP   | Polished Chrome                |
|  | SN   | Vibrant® Polished Nickel       |
|  | BN   | Vibrant® Brushed Nickel        |
|  | BL   | Matte Black                    |
|  | 2MB  | Vibrant® Brushed Moderne Brass |

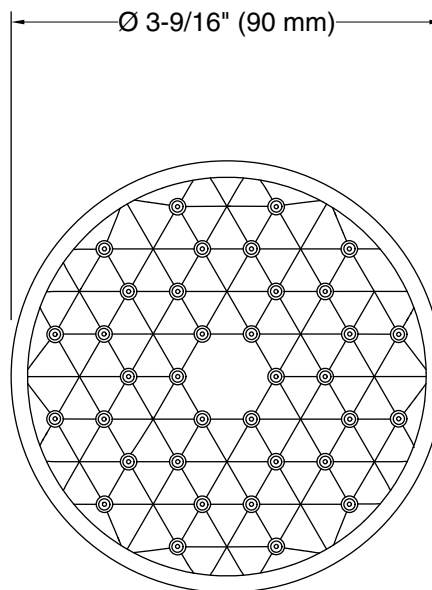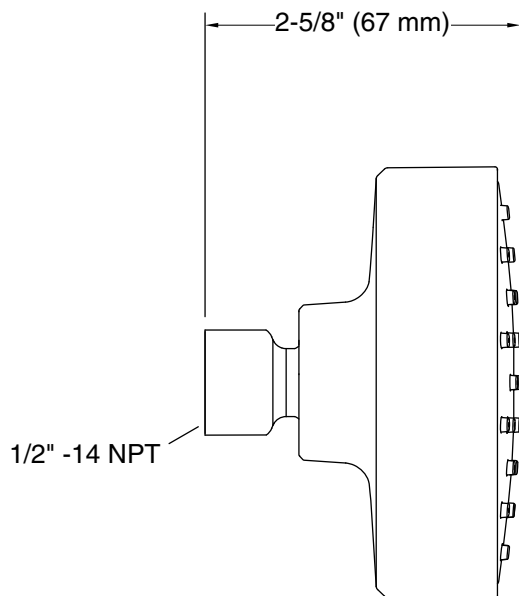

### Technical Information

All product dimensions are nominal.

#### Spout:

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

### Notes

Install this product according to the installation instructions.