

Inverter Driven Heat Pump

12,000 BTU Single Zone Floor Mount System

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

Auto Changeover
 24 hr. Timer
 Auto Louver
 Minimum Heat Mode
 Auto Restart
 Wireless Remote Controller Included
 Powerful Mode
 Floor Level Heating



MODEL NUMBERS

Indoor Unit	AGU12RLF
Outdoor Unit	AOU12RLFFH
System	12RLFFH

EFFICIENCIES

SEER	22.7
SEER 2	22.7
EER	13.1
EER 2	13.1
HSPF	11.3
HSPF 2 (IV) / HSPF 2 (V)	11/8.6
COP	kW/kW 3.24
COP	Btu/h 11.1
COP2	kW/kW 3.24
COP2	Btu/h 11.1

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(°C)	14 to 115 (-10 to 46)
Heating*		*-15 to 75 (-26 to 24)

CAPACITIES

Cooling	Rated	Btu/h	12000
	Min.-Max.		3,100-14,300
Heating	Rated	Btu/h	16000
	Min.-Max.		3,100-19,500

LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø1/4 (Ø6.35)
Gas		Ø3/8 (Ø9.52)
Pre-charge length	ft (m)	49 (15)
Minimum Length		10 (3)
Max. length		66 (20)
Max. height difference		49 (15)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	23-5/8 x 29-1/8 x 7-7/8 (600 x 740 x 200)
Gross (H x W x D)		27-9/16 x 32-5/16 x 12-3/16 (700 x 820 x 310)
Net Weight	lb (kg)	31 (14)
Gross Weight		37 (17)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	24-7/16 x 31-1/8 x 11-7/16 (620 x 790 x 290)
Gross (H x W x D)		28-1/16 x 37-3/16 x 15-9/16 (713 x 945 x 395)
Net Weight	lb (kg)	86 (39)
Gross Weight		95 (43)

* System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTY-RVNUM	Wired remote controller
UTY-RNNUM	Wired remote controller
UTY-RSNUM	Simple remote controller
UTY-XWZXZ5	External Connect Kit
FJ-IR-WIFI-1NA	Intesis IR WiFi module
FJ-RC-WIFI-1BT	Intesis Wired WiFi module



This system combination is Energy Star qualified



+App available in Apple® App Store and Google® Play Store.

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 05/07/2024

Fujitsu General America, Inc. • 342 Changebridge Rd, Pine Brook, NJ 07058 • Toll Free: (888) 888-3424 • www.fujitsugeneral.com

Inverter Driven Heat Pump

12,000 BTU Single Zone Floor Mount System


FAN DATA				
Indoor Unit Airflow rate	Cooling	HIGH	CFM (m3/h)	336 (570)
		MED		271 (460)
		LOW		212 (360)
		QUIET		159 (270)
	Heating	HIGH		353 (600)
		MED		283 (480)
		LOW		218 (370)
		QUIET		159 (270)
Outdoor Unit Airflow rate	Cooling		1,457 (2,475)	
	Heating		1,207 (2,050)	
SOUND PRESSURE				
Indoor Unit	Cooling	HIGH	dB (A)	40
		MED		35
		LOW		29
		QUIET		23
	Heating	HIGH		40
		MED		35
		LOW		29
		QUIET		23
Outdoor Unit	Cooling		53	
	Heating		52	
REFRIGERANT				
Type				R410A
Charge	lb oz	2 lb 10 oz		
	g	1200		
Oil Type				FREOL α68SZ

ELECTRICAL SPECIFICATIONS				
Voltage/Frequency/Phase		208/230 V~ 60 Hz		
Available Voltage Range		187–253 V		
Current	Cooling	Rated	A	4.2
	Heating	Rated		6.7
Maximum Operating Current	Cooling			10.3
	Heating			11.8
Starting current				6.7
MCA				11.8
Maximum Circuit Breaker			15	
Input Power	Cooling	Rated	kW	0.91
		Min.–Max.		0.20–2.05
	Heating	Rated		1.44
		Min.–Max.		0.20–2.62
Power Factor	Cooling		%	94.2
	Heating			93.4
OTHER				
Moisture Removal		pints/h (L/h)	3.8 (1.8)	
Energy Star			Yes	
Drain hose	Material		PP + LLDPE	
	Tip diameter	in (mm)	Ø 9/16 (Ø 13.8) (I.D.), Ø 5/8 to Ø 11/16 (Ø 15.8 to Ø 16.7) (O.D.)	
Operation Range	Cooling	°F (°C)	64 to 90 (18 to 32)	
		%RH	80 or less	
	Heating	°F (°C)	60 to 88 (16 to 30)	

DIMENSIONS:

Units: In. (mm)


Indoor Unit:

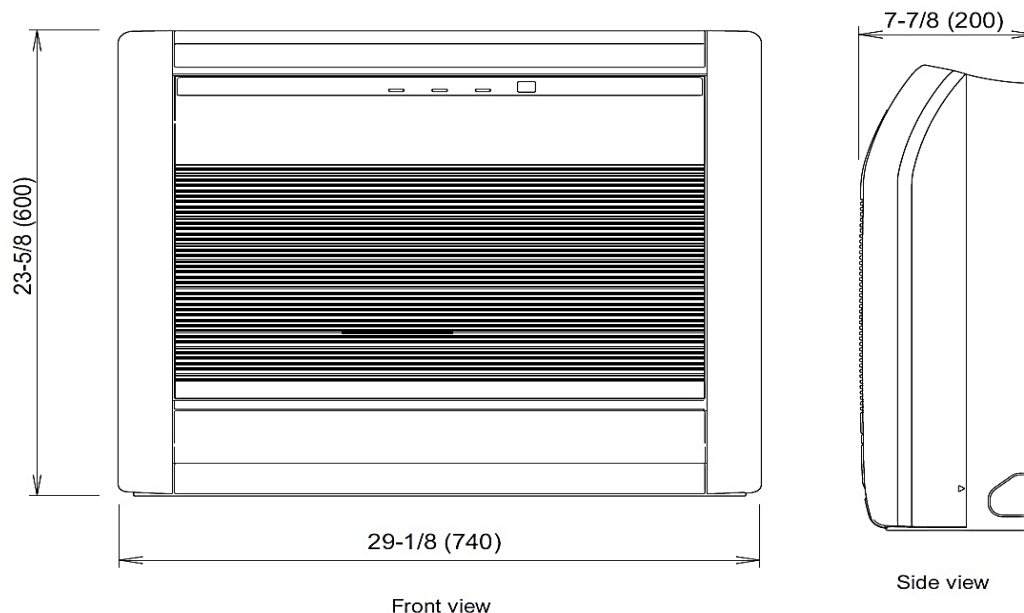

DIMENSIONS

Units: In. (mm)

Outdoor Unit

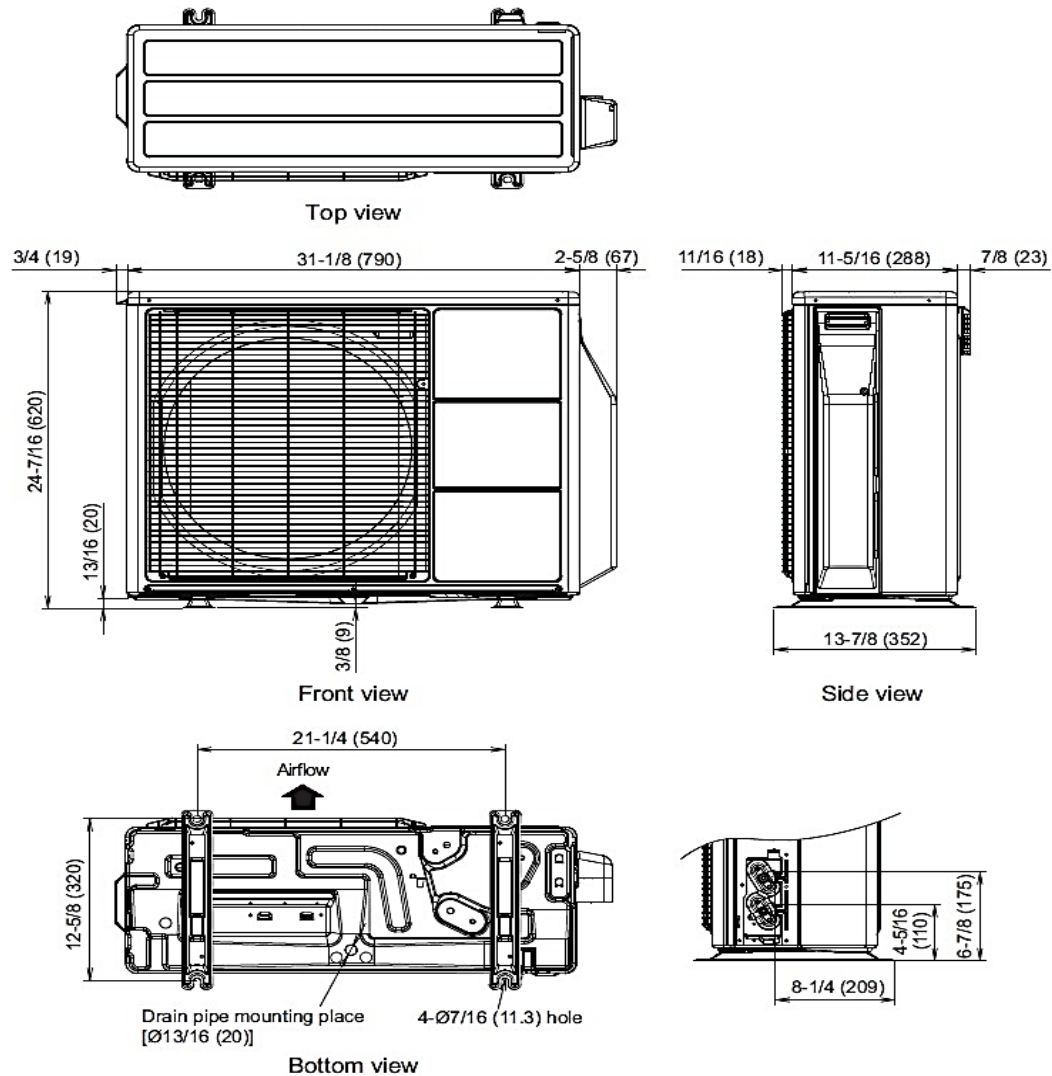

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).