

Inverter Driven Heat Pump

36,000 BTU Multi Zone System

Job Name _____
Location _____
Engineer _____
Submitted To _____
Submitted By _____
Reference _____

Date _____
Approval _____
Construction _____
Unit No _____
Drawing No _____

PRODUCT FEATURES

Operate as few as one indoor unit or all indoor units
Mix & match from 4 indoor unit styles
Blue-fin condenser coil coating



MODEL NUMBERS

Outdoor Unit AOU36RLXFZ1
System 36RLXFZ1

EFFICIENCIES

Indoor Unit Type	Non - Ducted	Ducted	Mix
SEER	18	16	17
SEER2	19	17	18
EER	10	9	9.5
EER2	10	9	9.5
HSPF	9.4	8.7	9.1
HSPF 2 (IV) / HSPF 2 (V)	9/6.7	8.2/6.4	8.6/6.5
COP	kW/kW 3.6	3.3	3.4
COP	Btu/hW 12.1	11.3	11.7
COP2	kW/kW 3.56	3.32	3.44
COP2	Btu/hW 12.1	11.3	11.7

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(°C)	14 to 115 (-10 to 46)
Heating*		*5 to 75 (-15 to 24)

CAPACITIES

Total Capacity Range			27,000 - 39,000
Cooling	Rated	Btu/h	35,200
	Min.-Max.		11,000 - 38,000
Heating	Rated		36,400
	Min.-Max.		11,000 - 42,000

LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø1/4 (Ø6.35) × 4
Gas		Ø3/8 (Ø9.52) × 3 + Ø1/2 (Ø12.7) × 1
Pre-charge length (Total)		164 (50)**
Max. length (Total)		230 (70)
Max. length (Each)		82 (25)
Min. length (Total)		66 (20)
Min. length (Each)		16 (5)
Max. height difference		49 (15)
Max. height difference between indoor units		33 (10)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	32-11/16 × 35-7/16 × 13 (830 × 900 × 330)
Gross (H x W x D)		39-3/8 × 41-5/16 × 17-1/2 (1,000 × 1,050 × 445)
Net Weight	lb (kg)	150 (68)
Gross Weight		168 (76)

* System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

SOUND PRESSURE

Outdoor Unit	Cooling	dB (A)	53
	Heating		55

FAN DATA

Outdoor Unit	Cooling	CFM (m3/h)	2,119 (3,600)
Airflow rate	Heating		2,119 (3,600)

ELECTRICAL SPECIFICATIONS

Indoor Unit Type	Non - Ducted	Ducted	Mix
Voltage/Frequency/Phase	1Ø 208/230 V 60 Hz		
Available Voltage Range	187-264V		
Current	Cooling	15.4	17.1
	Heating	13.1	14.1
Maximum Operating Current			
Starting current			
MCA			
Maximum Circuit Breaker			
Rated Input	Cooling	3.52	3.92
Power	Heating	3	3.22
Max. Input Power	Cooling	4.1	1.38
	Heating	3.7	3.85

Note: When AOU36RLXFZ1 is paired with two 18,000-Btu indoor units, you have to purchase optional part K9FZ1818 (UTP-MU36A2) kit. [Its pre-charge length is 66 ft (20 m)].

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 05/07/2024

Fujitsu General America, Inc. • 342 Changebrige Rd, Pine Brook, NJ 07058 • Toll Free: (888) 888-3424 • www.fujitsugeneral.com


Inverter Driven Heat Pump

36,000 BTU Multi Zone System

CONNECTABLE INDOOR UNITS

TYPE	Slim Duct (ADUH)
	Wall Mount (ASU/ASUH)
	Compact Cassette (ACUH)
	Floor Mount (AGU)
NUMBER	2 to 4
DIMENSIONS:	

Units: In. (mm)

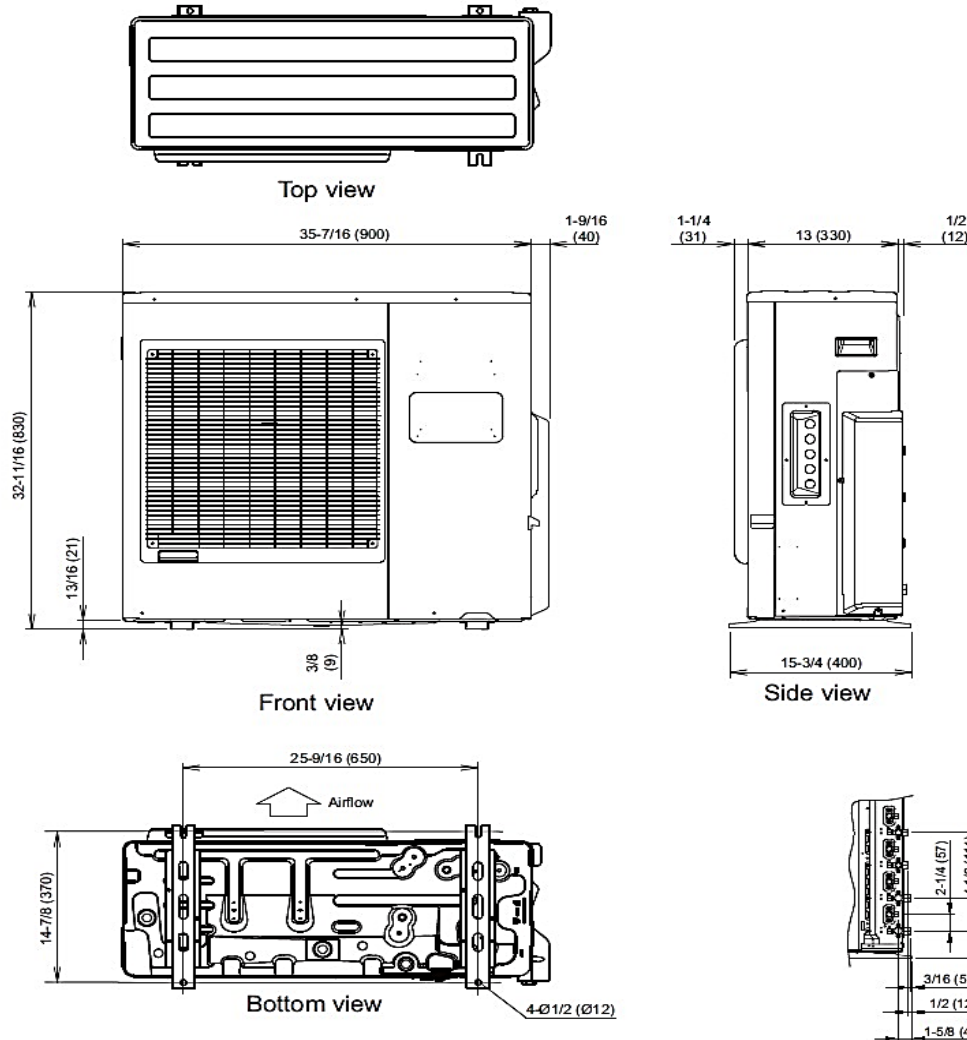

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).