

Inverter Driven Heat Pump

9,000 BTU Floor Mount Type

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

- Wireless remote controller
- Auto|Cool|Dry|Fan|Heat modes
- 24 Hr. timer
- Powerful mode
- Cold prevention
- Auto Restart



MODEL NUMBERS

Indoor Unit	AGU9RLF
Nominal Capacity	9,000

LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø 1/4 (Ø 6.35)
	Gas	Ø 3/8 (Ø 9.52)
Drain hose	Material	PVC
	in (mm)	Ø 9/16 (Ø 13.8) (I.D.), Ø 11/16 (Ø 16.7) (O.D.)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	23-5/8 x 29-1/8 x 7-7/8 (600 x 740 x 200)
Gross (H x W x D)		27-9/16 x 32-5/16 x 12-3/16 (700 x 820 x 310)
Net Weight	lb (kg)	31 (14)
Gross Weight		37 (17)

ELECTRICAL SPECIFICATIONS

Voltage/Frequency/Phase		208/230 V ~ 60 Hz
Available Voltage Range		187–253 V
Running Current	A	0.15
Input Power	W	16

SOUND PRESSURE

Indoor Unit	Cooling	HIGH	dB (A)	39
		MED		34
		LOW		28
		QUIET		22
	Heating	HIGH	dB (A)	39
		MED		35
		LOW		30
		QUIET		22

FAN DATA

Indoor Unit Airflow rate	Cooling	HIGH	CFM (m3/h)	312 (530)
		MED		259 (440)
		LOW		212 (360)
		QUIET		159 (270)
	Heating	HIGH	CFM (m3/h)	312 (530)
		MED		270 (460)
		LOW		224 (380)
		QUIET		159 (270)

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ENCLOSURE

Enclosure	Material	Polystyrene
	Color	White

ACCESSORIES

UTY-RVNUM	Wired remote controller
UTY-RNNUM	Wired remote controller
UTY-RSNUM	Simple remote controller
UTY-XWZXZ5	External Connect Kit
FJ-IR-WIFI-1NA	Intesis IR WiFi module
FJ-RC-WIFI-1BT	Intesis Wired WiFi module


Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 1/10/2023

DIMENSIONS:

Indoor Unit:

Units: In. (mm)

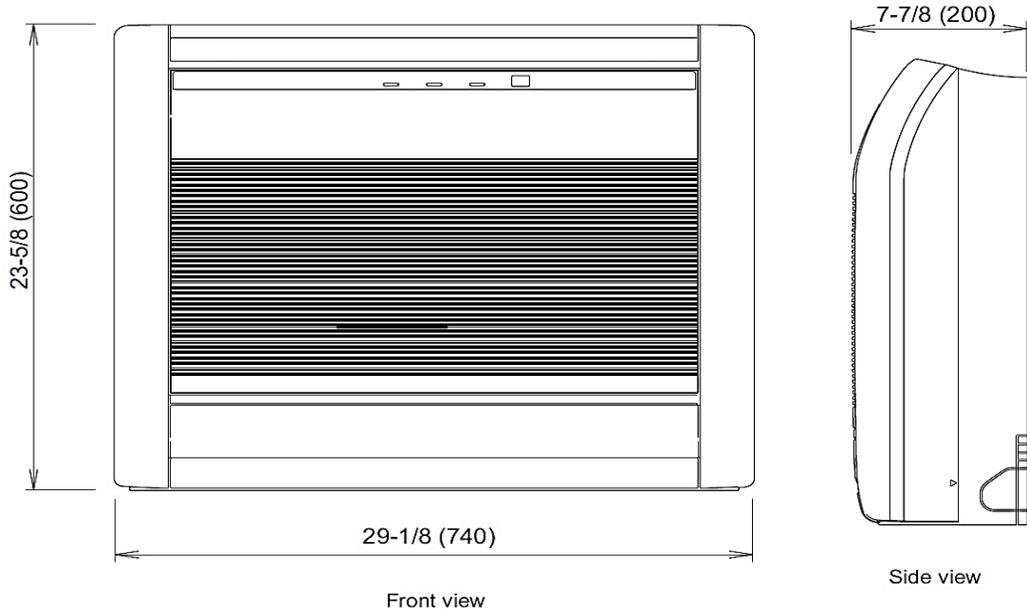

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2022 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).