

Features

- Fixture-mount design
- Chloramine resistance on all rubber components exposed to waterway
- Includes vacuum breaker and control stop

Material

- Durable brass construction

Technology

- Nonhold open piston technology for accurate activation

Installation

- Intended for urinal installations with 3/4" (19 mm) top spud coupling connection



ADA

CSA B651

OBC

Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

NOM Standards

NOM 002-CONAGUA

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

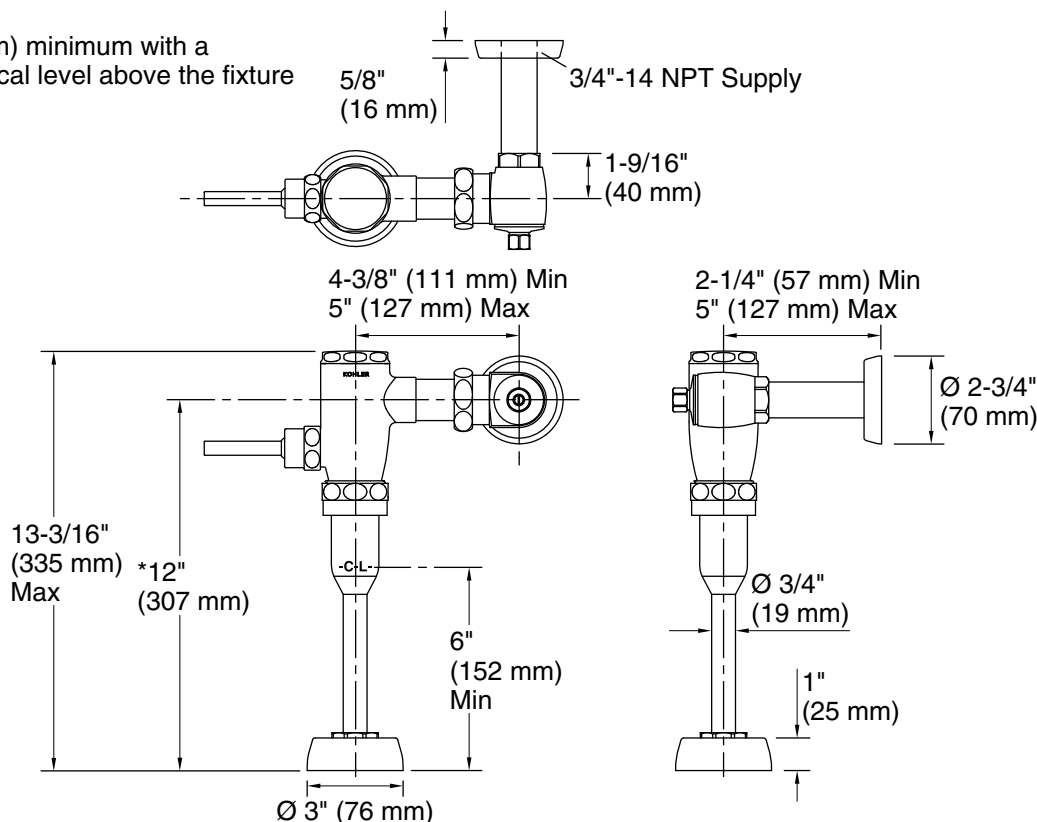

Technical Information

All product dimensions are nominal.

Spout:

Pressure/fixture Supply Requirements

Fixture pressure max (static):	80 psi (551.6 kPa)
Fixture pressure min (static):	25 psi (172.4 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	3.5 gpm (13.2 lpm)

Notes

Install this product according to the installation instructions.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.