

### Features

- Engineered for optimal performance with KOHLER toilets
- Fixture-mount design
- Chloramine resistance on all rubber components exposed to waterway
- Includes vacuum breaker and control stop
- 1.28 gpf (4.8 lpf) toilet valve use at least 20 percent less water than standard 1.6 gpf (6.0 lpf) toilet valve while still meeting strict performance guidelines

### Material

- Durable brass construction

### Technology

- Nonhold open piston technology for accurate activation

### Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection



**ADA**

**CSA B651**

**OBC**

### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

	CP	Polished Chrome
--	----	-----------------

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

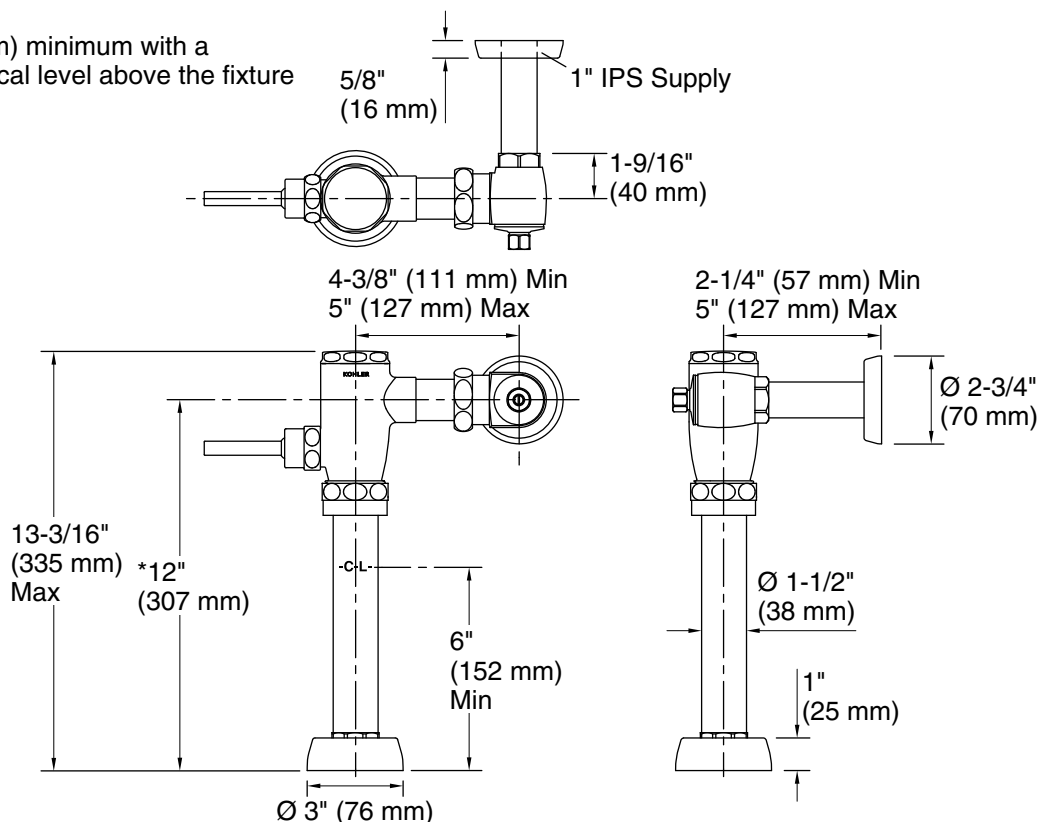

### Technical Information

All product dimensions are nominal.

#### Spout:

#### Pressure/fixture Supply Requirements

Fixture pressure max (static):	80 psi (551.6 kPa)
Fixture pressure min (static):	35 psi (241.3 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.