

KOHLER®

72" x 42" drop-in bath **K-1417**

Features

- Spacious design accommodates up to two bathers
- Coordinates with other products in the Memoirs collection

Material

Acrylic

Installation

Drop-in

Required Products/Accessories

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37385 rough-in cable drain, PVC, 45" cable K-78439 45" cable bath drain

Recommended Products/Accessories

K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-7265 Brass toe tap bath drain K-23726 Drain treatment K-23732 Tub & shower cleaner K-31796 Above-the-floor bath drain kit

K-31798 Bath drain kit



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 IAPMO Certification

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0 White






KOHLER®


72" x 42" drop-in bath **K-1417**

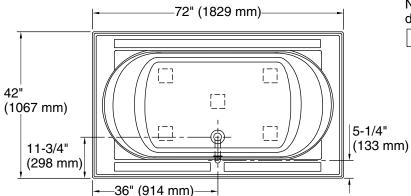

No change in measurements if connected with drain illustrated. (K-7161-AF)

Recommended Faucet Location

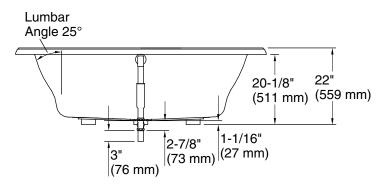



Technical Information

All product dimensions are nominal.

Drain location: Center

Basin area, bottom: 48" x 27" (1219 mm x 686 mm)
Basin area, top: 60" x 30" (1524 mm x 762 mm)

Weight: 86 lbs (39 kg)

Minimum floor load: 43 lbs/ft² (209.9 kg/m²)

Water depth: 16" (406 mm)
Water capacity: 94 gal (355.8 L)

Cutout: Drop-in, 70-1/2" x 40-1/2" (1791 mm x

1029 mm)

Minimum flat for 3-13/16" (97 mm)

door:

Notes

Measure your actual product for rough-in

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary

If installing a rim-mount faucet, make sure there is no interference above or below the deck

before drilling any holes.

