KOHLER Faucets

Single-function showerhead, 1.75 gpm K-939-G

Features

- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Single-function showerhead with 48 translucent nozzles
- 5-1/2" (140 mm) diameter sprayface
- 1.75 gpm (6.6 lpm) maximum flow rate
- Complements Purist faucets and accessories

Material

KOHLER finishes resist corrosion and tarnishing

Technology

 Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

Installation

- Wall-mount
- Shower arm and flange sold separately

Recommended Products/Accessories

K-7397 Shower Arm and Flange





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) **NOM Standards** NOM 008-CONAGUA

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|--------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | AF | Vibrant® French Gold |
| | BN | Vibrant® Brushed Nickel |
| | BV | Vibrant® Brushed Bronze |
| | BL | Matte Black |
| | TT | Vibrant Titanium |
| | BGP | Vibrant Brushed Graphite |
| | DR | Deep Bronze |





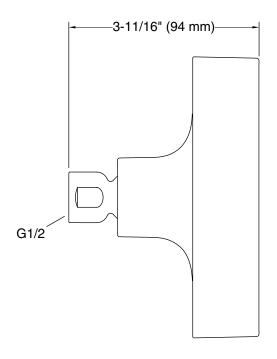

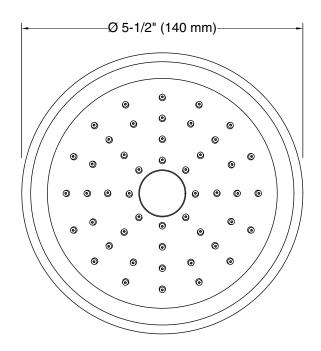

Technical Information

All product dimensions are nominal.

Spout:

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation

Install this product according to the installation instructions.