

Inverter Driven Heat Pump

9,000 BTU Single Zone Wall Mounted System

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

Auto Changeover
 24 hr. Timer
 Automatic airflow adjustment
 Auto/Cool/Dry/Fan/Heat modes
 Powerful Mode
 Cold Prevention
 Wireless Remote Controller Included



| MODEL NUMBERS | | | |
|-------------------------------------|-----------|---|--------------|
| Indoor Unit | | ASU9RL2 | |
| Outdoor Unit | | AOU9RL2 | |
| System | | 9RL2 | |
| EFFICIENCIES | | | |
| SEER | | 16 | |
| SEER 2 | | 16 | |
| EER | | 10.8 | |
| EER 2 | | 10.8 | |
| HSPF | | 9 | |
| HSPF 2 (IV) / HSPF 2 (V) | | 9/7.6 | |
| COP | kW/kW | | 3.8 |
| COP | Btu/hW | | 13 |
| COP2 | kW/kW | | 3.8 |
| COP2 | Btu/hW | | 13 |
| OUTDOOR TEMPERATURE OPERATION RANGE | | | |
| Cooling | *F(°C) | 14 to 115 (-10 to 46) | |
| Heating* | | *14 to 75 (-10 to 24) | |
| CAPACITIES | | | |
| Cooling | Rated | Btu/h | 9000 |
| | Min.—Max. | | 1,700—10,700 |
| Heating | Rated | | 10000 |
| | Min.—Max. | | 1,700—12,000 |
| LINESET REQUIREMENTS | | | |
| Connection Method | | Flare | |
| Liquid | in (mm) | Ø1/4 (Ø6.35) | |
| Gas | | Ø3/8 (Ø9.52) | |
| Pre-charge length | ft (m) | 49 (15) | |
| Minimum Length | | 10 (3) | |
| Max. length | | 66 (20) | |
| Max. height difference | | 49 (15) | |
| INDOOR DIMENSIONS & WEIGHT | | | |
| Net (H × W × D) | in (mm) | 10-5/16 × 32-5/16 × 8-1/8 (262 × 820 × 206) | |
| Gross (H × W × D) | | 10-3/8 × 34-1/4 × 12-15/16 (263 × 870 × 328) | |
| Net Weight | lb (kg) | 15 (7) | |
| Gross Weight | | 20 (9) | |
| OUTDOOR DIMENSIONS & WEIGHT | | | |
| Net (H × W × D) | in (mm) | 21-1/4 × 26 × 11-11/32 (540 × 660 × 290) | |
| Gross (H × W × D) | | 24-1/16 × 31-3/8 × 15-13/16 (611 × 797 × 401) | |
| Net Weight | lb (kg) | 64 (29) | |
| Gross Weight | | 68 (31) | |

* System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

| | |
|----------------|------------------------|
| FJ-IR-WIFI-1NA | Intesis WiFi IR Module |
|----------------|------------------------|



This system combination is Energy Star qualified



+App available in Apple® App Store and Google® Play Store.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 05/07/2024

Fujitsu General America, Inc. • 342 Changebridge Rd, Pine Brook, NJ 07058 • Toll Free: (888) 888-3424 • www.fujitsugeneral.com

Inverter Driven Heat Pump

9,000 BTU Single Zone Wall Mounted System

FAN DATA

| | | | | |
|---------------------------|---------|-------|------------|---------------|
| Indoor Unit Airflow rate | Cooling | HIGH | CFM (m3/h) | 424 (720) |
| | | MED | | 353 (600) |
| | | LOW | | 247 (420) |
| | | QUIET | | 191 (325) |
| | Heating | HIGH | | 436 (740) |
| | | MED | | 353 (600) |
| | | LOW | | 265 (450) |
| | | QUIET | | 191 (325) |
| Outdoor Unit Airflow rate | Cooling | | | 1,012 (1,720) |
| | Heating | | | 889 (1,510) |

SOUND PRESSURE

| | | | | |
|--------------|---------|-------|--------|----|
| Indoor Unit | Cooling | HIGH | dB (A) | 43 |
| | | MED | | 38 |
| | | LOW | | 33 |
| | | QUIET | | 23 |
| | Heating | HIGH | | 44 |
| | | MED | | 38 |
| | | LOW | | 33 |
| | | QUIET | | 23 |
| Outdoor Unit | Cooling | | | 47 |
| | Heating | | | 48 |

REFRIGERANT

| | | | |
|-------------|------------|-----------|--|
| REFRIGERANT | | | |
| Type | R410A | | |
| Charge | lb oz | 1 lb 7 oz | |
| | g | 650 | |
| Oil Type | POE (VG74) | | |

ELECTRICAL SPECIFICATIONS

| | | | | |
|---------------------------|---------|---------------|----|-----------|
| Voltage/Frequency/Phase | | 115 V~ 60 Hz | | |
| Available Voltage Range | | 103.5–126.5 V | | |
| Current | Cooling | Rated | A | 7.5 |
| | Heating | Rated | | 7 |
| Maximum Operating Current | Cooling | | | 13 |
| | Heating | | | 13.5 |
| Starting Current | | | | 7.5 |
| MCA | | | | 13.5 |
| Maximum Circuit Breaker | | | | 15 |
| Input Power | Cooling | Rated | kW | 0.83 |
| | | Min.–Max. | | 0.24–1.44 |
| | Heating | Rated | | 0.77 |
| | | Min.–Max. | | 0.21–1.49 |
| Power Factor | Cooling | | % | 96 |
| | Heating | | | 96 |


OTHER

| | | | |
|------------------|--------------|---------------|---|
| Moisture Removal | | pints/h (L/h) | 2.7 (1.3) |
| Energy Star | | | No |
| Drain hose | Material | | PP+HDPE |
| | Tip diameter | in (mm) | Ø17/32 (Ø13.8) (I.D.), Ø19/32 to 21/32 (Ø15 to 16.8) (O.D.) |
| Operation Range | Cooling | °F (°C) | 64 to 90 (18 to 32) |
| | Heating | %RH | 80 or less |
| | | °F (°C) | 60 to 88 (16 to 30) |

DIMENSIONS:

Units: In. (mm)


Wall Bracket Data:

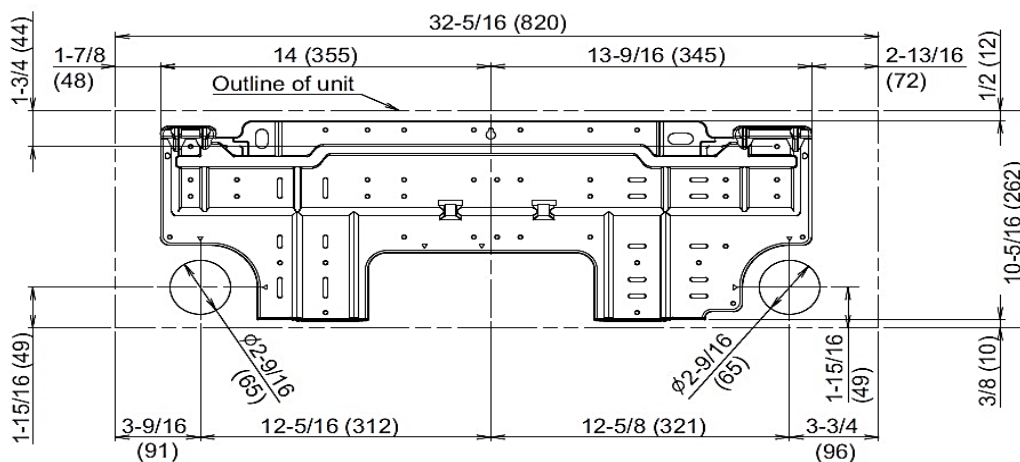


DIMENSIONS

Units: In. (mm)

Indoor Unit

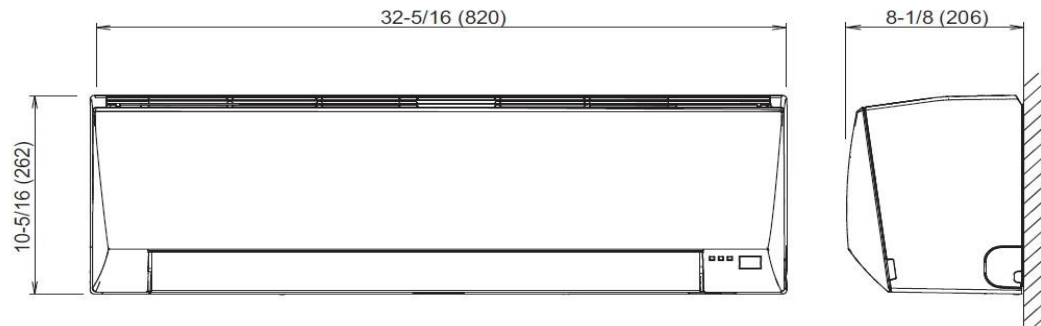

Outdoor Unit

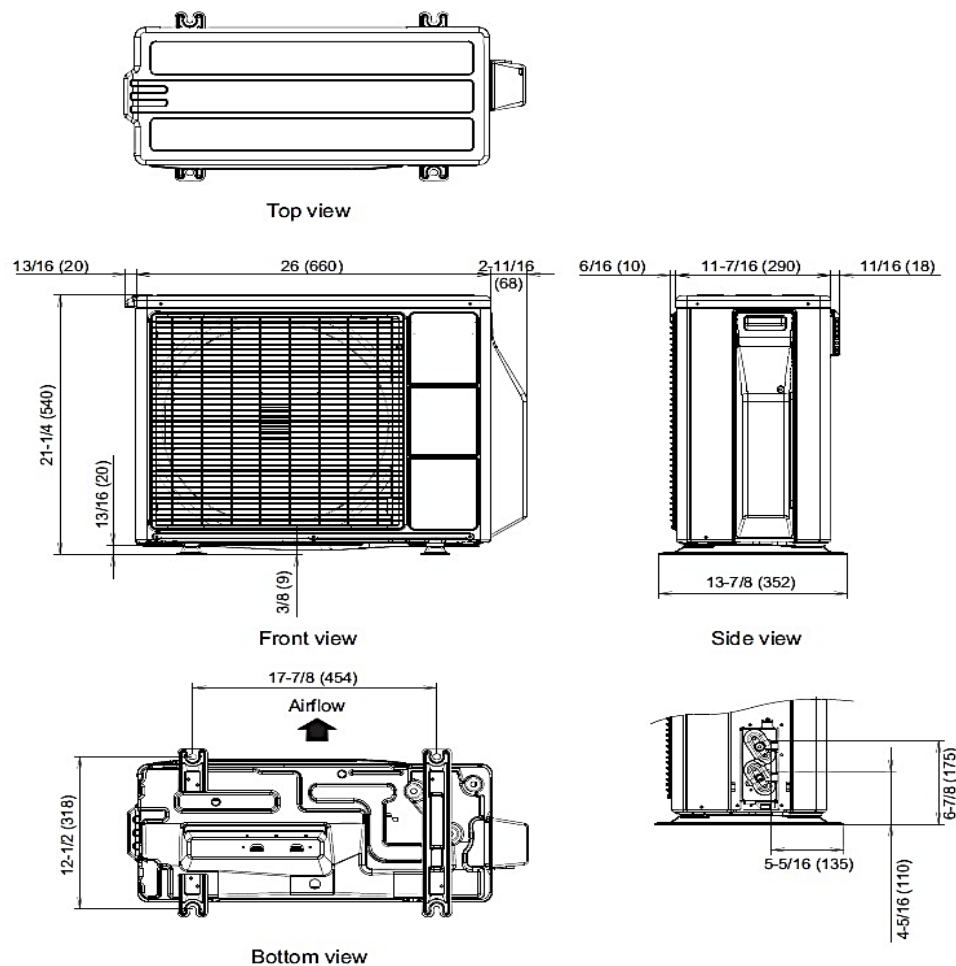

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).