



OUR COMMITMENT OVER 35 YEARS OF MANUFACTURING

Easyflex, Inc. is a leading manufacturer and distributor of corrugated stainless steel tubing products that specialize in providing flexible solutions for various industries, such as plumbing, refrigeration, and HVAC. The combination of stainless steel's strength with the flexibility of corrugation has made corrugated stainless steel tubing a popular choice for service jobs all over the world.

The company operates from its headquarters and on-site distribution center in Denton, TX, fully stocking and shipping products across the US, and maintains a Sales Office in Santa Ana, CA. Easyflex has been producing high-quality CSST products for over several decades and serves more than 50 countries worldwide. The company's core values of innovation, quality, and pride have delivered superior results and made us a trusted name in the industry.

Flexible lines are rapidly replacing rigid pipes in new construction and renovation projects due to their flexibility and cost-saving installation process. Easyflex emphasizes manufacturing high-quality products while understanding the importance of affordability for our customers. The ease of installation is the greatest advantage of using flexible lines, saving time and eliminating the need for extra connections.

Easyflex's ultimate goal is to connect the world with its products and demonstrate a safer, simpler, and easier way to get the job done.

Why

Choose Easyflex Corrugated Stainless Steel Tubing?

It's Easy.

Imagine installing an entire gas or water line system with just one connection at each end! No more mid-line connections, cuts, angles, and bulky fittings, just one clean line that gives you the freedom to make bends by hand wherever and whenever you need.

It's Fast.

This feature is perhaps the greatest advantage of using Easyflex flexible corrugated stainless steel tubing. By eliminating all the countless steps of measuring, cutting, and connecting rigid 90° angles, you save valuable time with installation.

It's Durable.

Stainless steel 304 is strong, corrosion-resistant, and withstands natural wear and tear better over time than rigid piping alternatives. When it comes to the longevity of the material, there's no comparison to stainless steel.

It's Flexible.

Annular corrugations create superior flexibility complimenting the excellent strength of stainless steel.

It's Lightweight.

CSST ranging from 50 ft. to 150 ft. in length is efficiently coiled into a single roll that you can easily carry over your shoulder. You only need one trip from your car to the job site.



ORDERING INFORMATION

Our Locations



**12966 Euclid St. Suite 515
Garden Grove, CA 92840**

Business Hours (PST)
Mon - Fri: 7:00 am - 4:00 pm (Office)



**1500 N. Western Blvd. Suite 280
Denton, TX 76207**

Business Hours (CST)
Mon - Fri: 7:00 am - 4:00 pm (Office / Warehouse)

 **TOLL FREE** (888) 577-8999

Tel: (714) 897-2200

Fax: (714) 892-2221

Email: info@easyflexusa.com

Submit Order: order@easyflexusa.com


SALES REPRESENTATIVES



W-1	S. CA O'Connor Sales, Inc.
W-2	CA / N. NV Elmco + Associates
W-3	WA / OR / N. ID King Sales NW
W-4	AZ / S. NV DW Sales Reps
W-5	UT / S. ID G & S Sales, Inc.
W-6	NM / W. TX M&M Sales, Inc.
W-7	CO / WY / MT Dalcant & Associates, Inc.
W-8	TX / OK Southwest Sales

E-1	FL Maco Southeast, Inc.
E-2	AL / GA / TN Ddum Sales
E-3	KY / AR Kemper Sales & Associates
E-4	IL HOK Sales
E-5	MI / OH / WV Moxie Market Sales, Inc.
E-6	SC / NC WB Marketing Group
E-7	PA / MD / DE / NJ / VA OnPoint Sales
E-8	NY / N. NJ EJL Sales & Marketing
E-9	CT / MA / RI / VT / NH / ME Pendleton Associates, Inc.

CONTENTS

	5	 Gastop <i>Gas Connectors</i> EFV • Gas Connectors • Gas Fittings • Gas Valves	Gas Connectors
	55	 MaxTrap <i>MaxTrap Gas Sediment Trap</i>	MaxTrap
	57	 <i>Commercial Gas Connectors</i> Food Service Gas Connectors • Countertop Gas Connectors Stationary Gas Connectors	Commercial Gas Connectors
	71	 Safeflow <i>Braided Water Connectors</i> Braided Water Connectors • Safeflow Braided Water Connectors	Braided Water Connectors
	85	 <i>Supply Stop Valves</i> 1/4 - Turn Ball Valves	Supply Stop Valves
	91	 <i>Water Heater Connectors</i> Water Heater Connectors • Copper Water Heater Connectors	Water Heater Connectors
	101	 Therminix Pro <i>Thermostatic Mixing Valves</i>	Thermostatic Mixing Valves
	105	 SOFT-TURN <i>Isolation Valves</i> Isolation Valve Kits • Lead-Free Isolation Valve Kits	Isolation Valves
	115	 ONE TANK <i>Thermal Expansion Tanks</i> ONE STRAP <i>OneStrap Mounting Bracket</i>	Thermal Expansion Tanks
	119	 <i>No Hub Couplings</i>	No Hub Couplings
	125	 <i>Flexible Couplings</i>	Flexible Couplings
	127	 <i>Flexible Sprinkler Drops</i>	Flexible Sprinkler Drops



Stainless Steel Flexible Gas Connectors

Complete selection of flexible connectors for gas appliance applications.

Stainless Steel Flexible Gas Connectors

Applications

Dryers / Boilers / Fireplaces / Space Heaters /
Manufactured Homes / Tankless Water Heaters /
Rooftop Units / Ranges / Ovens / BBQ Grills / Furnaces

Benefits

- Flexible to Reduce Labor Costs
- Interchangeable Fittings for Any Application
- Corrosion & Scaling Resistant
- Withstands 15 Applications of 90° Twists

Certifications & Approvals

- ANSI Z 21.24 / CSA 6.10 Gas Appliances
- ANSI Z 21.75 / CSA 6.27 Outdoor Gas Appliances & Manufactured Homes
- Commonwealth of Massachusetts Board of State Examiners
- City of New York-MEA #376-92-M



Materials

Tubing	Stainless Steel 304 (ASTM A240)
Coating	Epoxy
Fitting	Zinc-Plated Steel S45C

Pressure-Temperature

Rated Operating Temperature	-40°F to 150°F (-40°C to 65°C)
Rated Pressure	0.5 psi

Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Stainless Steel Flexible **Gas Connectors**

Product Testing

Strength Test	Withstands an internal hydrostatic pressure of 250 psi (17MPa) without bursting or leaking
Bending Test	Withstands 30 bends without leaking in depths of 2 inches or less of water
Torsion Test	Withstands 15 applications of 90° twists
Durability at High Temperature Test	Withstands up to 800°F
Strength of Fittings	Does not leak within a tightened torque of 1,040 inch-pounds

CERTIFICATIONS, APPROVALS, LISTINGS and COMPLIANCE

United States | CSA USA Standards Association

- ANSI Z 21.24 Connectors for Gas Appliances
- ANSI Z 21.75 Connectors for Outdoor Appliances and Manufactured Homes

Canada | CSA Canadian Standards Association

- CSA 6.10 Connectors for Gas Appliances
- CSA 6.27 Connectors for Outdoor Appliances and Manufactured Homes
- Meets the Requirements of CSA B149.1 National Gas and Propane Installation Code



Connector Minimum Flow Capacity

Straight Length Capacity (BTU/Hr., 0.64 Sp Gr., 1,000 BTU per cubic ft. at 0.5 inch W.C. pressure drop)

Series	Nominal OD	Nominal ID	12"	18"	24"	30"	36"	48"	60"	72"
014	3/8"	1/4"	48,000	43,800	40,000	36,400	33,400	28,300	24,900	23,100
038	1/2"	3/8"	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
012	5/8"	1/2"	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
034	1"	3/4"	290,900	290,900	290,900	270,500	255,900	215,000	197,400	173,900

The above flow capacities are the minimum performance requirements per ANSI Z21.24 CSA 6.10 & ANSI Z21.75-CSA 6.27. Easyflex Gas Connectors exceed these minimum flow capacity requirements.

Stainless Steel Flexible **Gas Connectors**



Certificate of Compliance

Certificate: 1992377

Master Contract: 238420

Project: 1992377

Date Issued: 2008/02/19

Issued to: **Kofulso Co., Ltd.**
377-8 Gungok-Dong, Seo-Gu
Incheon City,
South Korea

The products listed below are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US'



Issued by: Russell Dworznik

Authorized by: Trevor Perera, Manager of
Certification Services

Trevor Perera

PRODUCTS

- CLASS 3303 86** - CONNECTORS (GAS) - Gas Appliances and - Manufactured Homes-Certified to US Standards
- CLASS 3303 06** - CONNECTORS (GAS) - Outdoor Gas Appliances - and Manufactured Homes
- CLASS 3303 85** - CONNECTORS (GAS) - For Moveable Appliances-Certified to U.S. Standards
- CLASS 3303 05** - CONNECTORS (GAS) - For Moveable Appliances
- CLASS 3303 81** - CONNECTORS (GAS) - Connectors For Gas Appliances-Certified to U.S. Standards
- CLASS 3303 01** - CONNECTORS (GAS) - Connectors For Gas Appliances

The 'C' and 'US' indicators adjacent to the CSA Mark signify that the product has been evaluated to the applicable CSA and ANSI/UL Standards, for use in Canada and the U.S., respectively. This 'US' indicator includes products eligible to bear the NRTL indicator. NRTL, i.e. National Recognized Testing Laboratory, is a designation granted by the U.S. Occupational Safety and Health Administration (OSHA) to laboratories which have been recognized to perform certification to U.S. Standards.

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

*Stainless Steel Flexible **Gas** Connectors*

Combining flexibility, durability, and functionality, Easyflex gas appliance connectors are CSA design certified and 100% leak tested for the quality and security you demand. Available with safe-guard epoxy coating in yellow or black, or with uncoated stainless steel, plus with the largest variety of fittings, we have the gas connectors that will meet your needs.



Easyflex Stainless Steel Gas Appliance Connectors

Easyflex gas connectors are available to fit your residential gas appliances—whatever they may be. Corrosion resistant stainless steel 304 tubing and zinc-plated steel fittings are made with quality materials you can trust.



Easyflex Yellow Coated Gas Appliance Connectors

Easyflex Yellow Coated gas connectors offer the same features as the uncoated stainless steel version with safe-guard yellow epoxy coating for added durability. It provides extra protection from corrosion, chemical stains from common household products, and during plumbing repairs. Corrosion resistant stainless steel 304 tubing and zinc-plated steel fittings are quality materials you can trust.



Easyflex Black Coated Gas Appliance Connectors

For gas hearth installations, Easyflex Black Coated gas connectors with safe-guard black epoxy coating are durable and corrosion resistant. Safe-guard protects better against common wear and tear, including chemical stains from common household products and during plumbing repairs.

With the additional benefit of the discreet black coating for minimal visibility, these gas connectors are ideal for fireplaces, BBQ grills, and radiant heaters. Corrosion resistant stainless steel 304 tubing and zinc-plated steel fittings are quality materials you can trust.



Stainless Steel Flexible **Gas Connectors**

Parts Numbering System

EFGC - 012 - SS - 1010 - 12

TUBE ID COATING FITTINGS LENGTH

TUBE ID

Part#	Size (ID)	Thread
014	3/8" OD (1/4" ID)	5/8"-18
038	1/2" OD (3/8" ID)	3/4"-16
012	5/8" OD (1/2" ID)	15/16"-16
034	1" OD (3/4" ID)	1-1/8"-16

COATING

Part#	
SS	Uncoated Stainless Steel 304
YE	Yellow Epoxy Coated Stainless Steel 304
BE	Black Epoxy Coated Stainless Steel 304

ADAPTERS/VALVES

Part#	Size (ID)
10	1/2" MIP (Tapped 3/8" FIP)
11	1/2" FIP
12	3/8" MIP (Tapped 1/4" FIP)
13	3/8" FIP
14	3/4" MIP (Tapped 1/2" FIP)
15	3/4" FIP
16	1" MIP (Tapped 3/4" FIP)
17	1" FIP
31	1/2" FIP Ball Valve
33	3/4" FIP Ball Valve
41	1/2" FIP Angle Valve
43	3/4" FIP Angle Valve

LENGTH

Part#
12"
18"
24"
30"
36"
48"
60"
72"

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings


Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas** Connectors

014-SS Series Connector with Fittings

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)

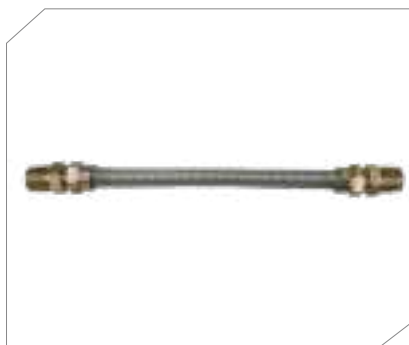

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-1012-12	1/2" MIP x 3/8" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1012-18	1/2" MIP x 3/8" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1012-24	1/2" MIP x 3/8" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1012-30	1/2" MIP x 3/8" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1012-36	1/2" MIP x 3/8" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1012-48	1/2" MIP x 3/8" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1012-60	1/2" MIP x 3/8" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-1012-72	1/2" MIP x 3/8" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-1013-12	1/2" MIP x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1013-18	1/2" MIP x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1013-24	1/2" MIP x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1013-30	1/2" MIP x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1013-36	1/2" MIP x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1013-48	1/2" MIP x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1013-60	1/2" MIP x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-1013-72	1/2" MIP x 3/8" FIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors

014-SS Series Connector with Fittings

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-1213-12	3/8" MIP x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1213-18	3/8" MIP x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1213-24	3/8" MIP x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1213-30	3/8" MIP x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1213-36	3/8" MIP x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1213-48	3/8" MIP x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1213-60	3/8" MIP x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-1213-72	3/8" MIP x 3/8" FIP, 72"	EA		12



014-SS Series Connector with Ball Valve

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- Valve : Brass
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings


Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

014-YE Series Connector with Fittings


- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12

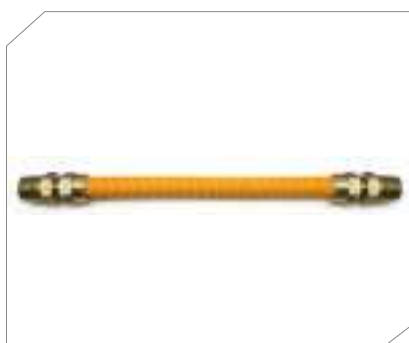

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-1012-12	1/2" MIP x 3/8" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1012-18	1/2" MIP x 3/8" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1012-24	1/2" MIP x 3/8" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1012-30	1/2" MIP x 3/8" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1012-36	1/2" MIP x 3/8" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1012-48	1/2" MIP x 3/8" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1012-60	1/2" MIP x 3/8" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-1012-72	1/2" MIP x 3/8" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-1013-12	1/2" MIP x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1013-18	1/2" MIP x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1013-24	1/2" MIP x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1013-30	1/2" MIP x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1013-36	1/2" MIP x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1013-48	1/2" MIP x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1013-60	1/2" MIP x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-1013-72	1/2" MIP x 3/8" FIP, 72"	EA		12

Stainless Steel Flexible **Gas Connectors**

014-YE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-1213-12	3/8" MIP x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1213-18	3/8" MIP x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1213-24	3/8" MIP x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1213-30	3/8" MIP x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1213-36	3/8" MIP x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1213-48	3/8" MIP x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1213-60	3/8" MIP x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-1213-72	3/8" MIP x 3/8" FIP, 72"	EA		12



014-YE Series Connector with Ball Valve

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C, Brass Ball Valve
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

014-BE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)




OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-1012-12	1/2" MIP x 3/8" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1012-18	1/2" MIP x 3/8" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1012-24	1/2" MIP x 3/8" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1012-30	1/2" MIP x 3/8" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1012-36	1/2" MIP x 3/8" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1012-48	1/2" MIP x 3/8" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1012-60	1/2" MIP x 3/8" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-1012-72	1/2" MIP x 3/8" MIP, 72"	EA		12

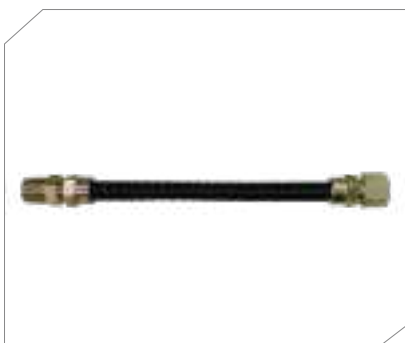

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-1013-12	1/2" MIP x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1013-18	1/2" MIP x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1013-24	1/2" MIP x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1013-30	1/2" MIP x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1013-36	1/2" MIP x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1013-48	1/2" MIP x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1013-60	1/2" MIP x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-1013-72	1/2" MIP x 3/8" FIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors

014-BE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-1213-12	3/8" MIP x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1213-18	3/8" MIP x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1213-24	3/8" MIP x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1213-30	3/8" MIP x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1213-36	3/8" MIP x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1213-48	3/8" MIP x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1213-60	3/8" MIP x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-1213-72	3/8" MIP x 3/8" FIP, 72"	EA		12



014-BE Series Connector with Ball Valve

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- Valve : Brass
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

038-SS Series Connector with Fittings

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1111-12	1/2" FIP x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1111-18	1/2" FIP x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1111-24	1/2" FIP x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1111-30	1/2" FIP x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1111-36	1/2" FIP x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1111-48	1/2" FIP x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1111-60	1/2" FIP x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1111-72	1/2" FIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1012-12	1/2" MIP x 3/8" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1012-18	1/2" MIP x 3/8" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1012-24	1/2" MIP x 3/8" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1012-30	1/2" MIP x 3/8" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1012-36	1/2" MIP x 3/8" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1012-48	1/2" MIP x 3/8" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1012-60	1/2" MIP x 3/8" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1012-72	1/2" MIP x 3/8" MIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors

038-SS Series Connector with Fittings

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1013-12	1/2" MIP x 3/8" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1013-18	1/2" MIP x 3/8" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1013-24	1/2" MIP x 3/8" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1013-30	1/2" MIP x 3/8" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1013-36	1/2" MIP x 3/8" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1013-48	1/2" MIP x 3/8" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1013-60	1/2" MIP x 3/8" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1013-72	1/2" MIP x 3/8" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1213-12	3/8" MIP x 3/8" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1213-18	3/8" MIP x 3/8" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1213-24	3/8" MIP x 3/8" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1213-30	3/8" MIP x 3/8" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1213-36	3/8" MIP x 3/8" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1213-48	3/8" MIP x 3/8" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1213-60	3/8" MIP x 3/8" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1213-72	3/8" MIP x 3/8" FIP, 72"	EA		12



038-SS Series Connector with Ball Valve

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- Valve : Brass
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

038-YE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)




OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1111-12	1/2" FIP x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1111-18	1/2" FIP x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1111-24	1/2" FIP x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1111-30	1/2" FIP x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1111-36	1/2" FIP x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1111-48	1/2" FIP x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1111-60	1/2" FIP x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1111-72	1/2" FIP x 1/2" FIP, 72"	EA		12

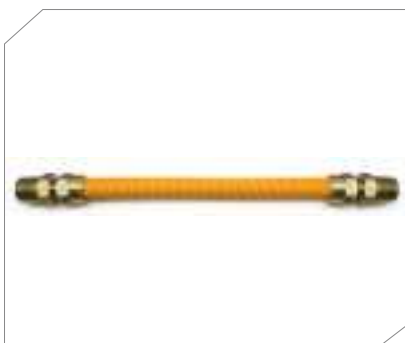

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1012-12	1/2" MIP x 3/8" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1012-18	1/2" MIP x 3/8" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1012-24	1/2" MIP x 3/8" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1012-30	1/2" MIP x 3/8" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1012-36	1/2" MIP x 3/8" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1012-48	1/2" MIP x 3/8" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1012-60	1/2" MIP x 3/8" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1012-72	1/2" MIP x 3/8" MIP, 72"	EA		12

Stainless Steel Flexible Gas Connectors

038-YE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1013-12	1/2" MIP x 3/8" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1013-18	1/2" MIP x 3/8" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1013-24	1/2" MIP x 3/8" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1013-30	1/2" MIP x 3/8" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1013-36	1/2" MIP x 3/8" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1013-48	1/2" MIP x 3/8" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1013-60	1/2" MIP x 3/8" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1013-72	1/2" MIP x 3/8" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1213-12	3/8" MIP x 3/8" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1213-18	3/8" MIP x 3/8" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1213-24	3/8" MIP x 3/8" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1213-30	3/8" MIP x 3/8" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1213-36	3/8" MIP x 3/8" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1213-48	3/8" MIP x 3/8" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1213-60	3/8" MIP x 3/8" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1213-72	3/8" MIP x 3/8" FIP, 72"	EA		12



038-YE Series Connector with Ball Valve

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- Valve : Brass
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-YE-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-YE-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-YE-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

038-BE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)




OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1111-12	1/2" FIP x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1111-18	1/2" FIP x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1111-24	1/2" FIP x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1111-30	1/2" FIP x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1111-36	1/2" FIP x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1111-48	1/2" FIP x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1111-60	1/2" FIP x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1111-72	1/2" FIP x 1/2" FIP, 72"	EA		12

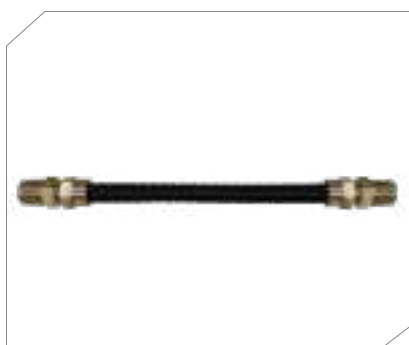

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1012-12	1/2" MIP x 3/8" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1012-18	1/2" MIP x 3/8" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1012-24	1/2" MIP x 3/8" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1012-30	1/2" MIP x 3/8" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1012-36	1/2" MIP x 3/8" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1012-48	1/2" MIP x 3/8" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1012-60	1/2" MIP x 3/8" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1012-72	1/2" MIP x 3/8" MIP, 72"	EA		12

Stainless Steel Flexible Gas Connectors

038-BE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1013-12	1/2" MIP x 3/8" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1013-18	1/2" MIP x 3/8" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1013-24	1/2" MIP x 3/8" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1013-30	1/2" MIP x 3/8" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1013-36	1/2" MIP x 3/8" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1013-48	1/2" MIP x 3/8" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1013-60	1/2" MIP x 3/8" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1013-72	1/2" MIP x 3/8" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1213-12	3/8" MIP x 3/8" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1213-18	3/8" MIP x 3/8" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1213-24	3/8" MIP x 3/8" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1213-30	3/8" MIP x 3/8" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1213-36	3/8" MIP x 3/8" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1213-48	3/8" MIP x 3/8" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1213-60	3/8" MIP x 3/8" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1213-72	3/8" MIP x 3/8" FIP, 72"	EA		12



038-BE Series Connector with Ball Valve

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- Valve : Brass
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-BE-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-BE-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-BE-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

012-SS Series Connector with Fittings

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1111-12	1/2" FIP x 1/2" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1111-18	1/2" FIP x 1/2" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1111-24	1/2" FIP x 1/2" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1111-30	1/2" FIP x 1/2" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1111-36	1/2" FIP x 1/2" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1111-48	1/2" FIP x 1/2" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1111-60	1/2" FIP x 1/2" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1111-72	1/2" FIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1014-12	1/2" MIP x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1014-18	1/2" MIP x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1014-24	1/2" MIP x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1014-30	1/2" MIP x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1014-36	1/2" MIP x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1014-48	1/2" MIP x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1014-60	1/2" MIP x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1014-72	1/2" MIP x 3/4" MIP, 72"	EA		12

Stainless Steel Flexible Gas Connectors

012-SS Series Connector with Fittings


- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1015-12	1/2" MIP x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1015-18	1/2" MIP x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1015-24	1/2" MIP x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1015-30	1/2" MIP x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1015-36	1/2" MIP x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1015-48	1/2" MIP x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1015-60	1/2" MIP x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1015-72	1/2" MIP x 3/4" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1414-12	3/4" MIP x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1414-18	3/4" MIP x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1414-24	3/4" MIP x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1414-30	3/4" MIP x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1414-48	3/4" MIP x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		12

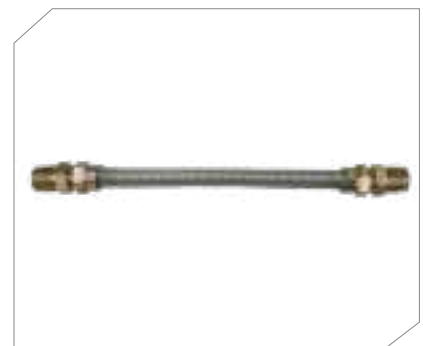

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1415-12	3/4" MIP x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1415-18	3/4" MIP x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1415-24	3/4" MIP x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1415-30	3/4" MIP x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1415-36	3/4" MIP x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1415-48	3/4" MIP x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1415-60	3/4" MIP x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1415-72	3/4" MIP x 3/4" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1515-12	3/4" FIP x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1515-18	3/4" FIP x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1515-24	3/4" FIP x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1515-30	3/4" FIP x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1515-36	3/4" FIP x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1515-48	3/4" FIP x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1515-60	3/4" FIP x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1515-72	3/4" FIP x 3/4" FIP, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**

012-SS Series Connector with Ball Valve

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C, Brass Ball Valve
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1033-12	1/2" MIP x 3/4" B.Valve, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1033-18	1/2" MIP x 3/4" B.Valve, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1033-24	1/2" MIP x 3/4" B.Valve, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1033-30	1/2" MIP x 3/4" B.Valve, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1033-36	1/2" MIP x 3/4" B.Valve, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1033-48	1/2" MIP x 3/4" B.Valve, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1033-60	1/2" MIP x 3/4" B.Valve, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1033-72	1/2" MIP x 3/4" B.Valve, 72"	EA		12

012-SS Series Connector with Angle Valve

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C, Brass Angle Valve
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-1043-12	1/2" MIP x 3/4" A.Valve, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1043-18	1/2" MIP x 3/4" A.Valve, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1043-24	1/2" MIP x 3/4" A.Valve, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1043-30	1/2" MIP x 3/4" A.Valve, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1043-36	1/2" MIP x 3/4" A.Valve, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1043-48	1/2" MIP x 3/4" A.Valve, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-1043-60	1/2" MIP x 3/4" A.Valve, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-1043-72	1/2" MIP x 3/4" A.Valve, 72"	EA		12

Stainless Steel Flexible Gas Connectors

012-YE Series Connector with Fittings


- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1010-12	1/2" MIP x 1/2" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1010-18	1/2" MIP x 1/2" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1010-30	1/2" MIP x 1/2" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		12




OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1011-12	1/2" MIP x 1/2" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1011-18	1/2" MIP x 1/2" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1011-30	1/2" MIP x 1/2" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		12

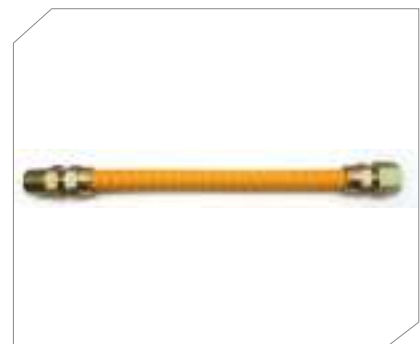

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1111-12	1/2" FIP x 1/2" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1111-18	1/2" FIP x 1/2" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1111-24	1/2" FIP x 1/2" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1111-30	1/2" FIP x 1/2" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1111-36	1/2" FIP x 1/2" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1111-48	1/2" FIP x 1/2" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1111-60	1/2" FIP x 1/2" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1111-72	1/2" FIP x 1/2" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1014-12	1/2" MIP x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1014-18	1/2" MIP x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1014-24	1/2" MIP x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1014-30	1/2" MIP x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1014-36	1/2" MIP x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1014-48	1/2" MIP x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1014-60	1/2" MIP x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1014-72	1/2" MIP x 3/4" MIP, 72"	EA		12

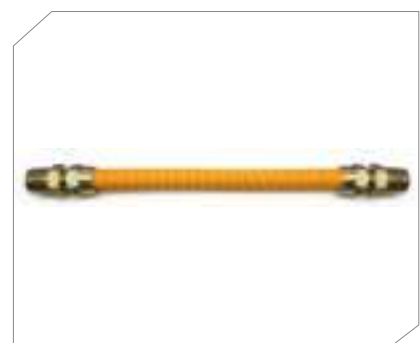

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible *Gas* Connectors

012-YE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1015-12	1/2" MIP x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1015-18	1/2" MIP x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1015-24	1/2" MIP x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1015-30	1/2" MIP x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1015-36	1/2" MIP x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1015-48	1/2" MIP x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1015-60	1/2" MIP x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1015-72	1/2" MIP x 3/4" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1414-12	3/4" MIP x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1414-18	3/4" MIP x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1414-24	3/4" MIP x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1414-30	3/4" MIP x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1414-48	3/4" MIP x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1415-12	3/4" MIP x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1415-18	3/4" MIP x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1415-24	3/4" MIP x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1415-30	3/4" MIP x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1415-36	3/4" MIP x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1415-48	3/4" MIP x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1415-60	3/4" MIP x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1415-72	3/4" MIP x 3/4" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1515-12	3/4" FIP x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1515-18	3/4" FIP x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1515-24	3/4" FIP x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1515-30	3/4" FIP x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1515-36	3/4" FIP x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1515-48	3/4" FIP x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1515-60	3/4" FIP x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1515-72	3/4" FIP x 3/4" FIP, 72"	EA		12

Stainless Steel Flexible Gas Connectors

012-YE Series Connector with Ball Valve

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C, Brass Ball Valve
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1031-12	1/2" MIP x 1/2" B.Valve, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1031-18	1/2" MIP x 1/2" B.Valve, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1031-24	1/2" MIP x 1/2" B.Valve, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1031-30	1/2" MIP x 1/2" B.Valve, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1031-36	1/2" MIP x 1/2" B.Valve, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1031-48	1/2" MIP x 1/2" B.Valve, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1031-60	1/2" MIP x 1/2" B.Valve, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1031-72	1/2" MIP x 1/2" B.Valve, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1033-12	1/2" MIP x 3/4" B.Valve, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1033-18	1/2" MIP x 3/4" B.Valve, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1033-24	1/2" MIP x 3/4" B.Valve, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1033-30	1/2" MIP x 3/4" B.Valve, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1033-36	1/2" MIP x 3/4" B.Valve, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1033-48	1/2" MIP x 3/4" B.Valve, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1033-60	1/2" MIP x 3/4" B.Valve, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1033-72	1/2" MIP x 3/4" B.Valve, 72"	EA		12



012-YE Series Connector with Angle Valve

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C, Brass Angle Valve
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-1043-12	1/2" MIP x 3/4" A.Valve, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1043-18	1/2" MIP x 3/4" A.Valve, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1043-24	1/2" MIP x 3/4" A.Valve, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1043-30	1/2" MIP x 3/4" A.Valve, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1043-36	1/2" MIP x 3/4" A.Valve, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1043-48	1/2" MIP x 3/4" A.Valve, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-1043-60	1/2" MIP x 3/4" A.Valve, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-1043-72	1/2" MIP x 3/4" A.Valve, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings


Flexible
Couplings

Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas** Connectors

034-SS Series Connector with Fittings

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 1" OD (3/4" ID)

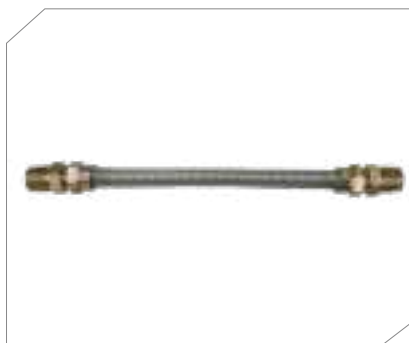

OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-SS-1414-12	3/4" MIP x 3/4" MIP, 12"	EA		25
1" (3/4" ID)	EFGC-034-SS-1414-18	3/4" MIP x 3/4" MIP, 18"	EA		25
1" (3/4" ID)	EFGC-034-SS-1414-24	3/4" MIP x 3/4" MIP, 24"	EA		25
1" (3/4" ID)	EFGC-034-SS-1414-30	3/4" MIP x 3/4" MIP, 30"	EA		25
1" (3/4" ID)	EFGC-034-SS-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		25
1" (3/4" ID)	EFGC-034-SS-1414-48	3/4" MIP x 3/4" MIP, 48"	EA		25
1" (3/4" ID)	EFGC-034-SS-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		12
1" (3/4" ID)	EFGC-034-SS-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-SS-1415-12	3/4" MIP x 3/4" FIP, 12"	EA		25
1" (3/4" ID)	EFGC-034-SS-1415-18	3/4" MIP x 3/4" FIP, 18"	EA		25
1" (3/4" ID)	EFGC-034-SS-1415-24	3/4" MIP x 3/4" FIP, 24"	EA		25
1" (3/4" ID)	EFGC-034-SS-1415-30	3/4" MIP x 3/4" FIP, 30"	EA		25
1" (3/4" ID)	EFGC-034-SS-1415-36	3/4" MIP x 3/4" FIP, 36"	EA		25
1" (3/4" ID)	EFGC-034-SS-1415-48	3/4" MIP x 3/4" FIP, 48"	EA		25
1" (3/4" ID)	EFGC-034-SS-1415-60	3/4" MIP x 3/4" FIP, 60"	EA		12
1" (3/4" ID)	EFGC-034-SS-1415-72	3/4" MIP x 3/4" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-SS-1515-12	3/4" FIP x 3/4" FIP, 12"	EA		25
1" (3/4" ID)	EFGC-034-SS-1515-18	3/4" FIP x 3/4" FIP, 18"	EA		25
1" (3/4" ID)	EFGC-034-SS-1515-24	3/4" FIP x 3/4" FIP, 24"	EA		25
1" (3/4" ID)	EFGC-034-SS-1515-30	3/4" FIP x 3/4" FIP, 30"	EA		25
1" (3/4" ID)	EFGC-034-SS-1515-36	3/4" FIP x 3/4" FIP, 36"	EA		25
1" (3/4" ID)	EFGC-034-SS-1515-48	3/4" FIP x 3/4" FIP, 48"	EA		25
1" (3/4" ID)	EFGC-034-SS-1515-60	3/4" FIP x 3/4" FIP, 60"	EA		12
1" (3/4" ID)	EFGC-034-SS-1515-72	3/4" FIP x 3/4" FIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors

034-YE Series Connector with Fittings

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 1" OD (3/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-YE-1414-12	3/4" MIP x 3/4" MIP, 12"	EA		25
1" (3/4" ID)	EFGC-034-YE-1414-18	3/4" MIP x 3/4" MIP, 18"	EA		25
1" (3/4" ID)	EFGC-034-YE-1414-24	3/4" MIP x 3/4" MIP, 24"	EA		25
1" (3/4" ID)	EFGC-034-YE-1414-30	3/4" MIP x 3/4" MIP, 30"	EA		25
1" (3/4" ID)	EFGC-034-YE-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		25
1" (3/4" ID)	EFGC-034-YE-1414-48	3/4" MIP x 3/4" MIP, 48"	EA		25
1" (3/4" ID)	EFGC-034-YE-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		12
1" (3/4" ID)	EFGC-034-YE-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-YE-1415-12	3/4" MIP x 3/4" FIP, 12"	EA		25
1" (3/4" ID)	EFGC-034-YE-1415-18	3/4" MIP x 3/4" FIP, 18"	EA		25
1" (3/4" ID)	EFGC-034-YE-1415-24	3/4" MIP x 3/4" FIP, 24"	EA		25
1" (3/4" ID)	EFGC-034-YE-1415-30	3/4" MIP x 3/4" FIP, 30"	EA		25
1" (3/4" ID)	EFGC-034-YE-1415-36	3/4" MIP x 3/4" FIP, 36"	EA		25
1" (3/4" ID)	EFGC-034-YE-1415-48	3/4" MIP x 3/4" FIP, 48"	EA		25
1" (3/4" ID)	EFGC-034-YE-1415-60	3/4" MIP x 3/4" FIP, 60"	EA		12
1" (3/4" ID)	EFGC-034-YE-1415-72	3/4" MIP x 3/4" FIP, 72"	EA		12



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-YE-1515-12	3/4" FIP x 3/4" FIP, 12"	EA		25
1" (3/4" ID)	EFGC-034-YE-1515-18	3/4" FIP x 3/4" FIP, 18"	EA		25
1" (3/4" ID)	EFGC-034-YE-1515-24	3/4" FIP x 3/4" FIP, 24"	EA		25
1" (3/4" ID)	EFGC-034-YE-1515-30	3/4" FIP x 3/4" FIP, 30"	EA		25
1" (3/4" ID)	EFGC-034-YE-1515-36	3/4" FIP x 3/4" FIP, 36"	EA		25
1" (3/4" ID)	EFGC-034-YE-1515-48	3/4" FIP x 3/4" FIP, 48"	EA		25
1" (3/4" ID)	EFGC-034-YE-1515-60	3/4" FIP x 3/4" FIP, 60"	EA		12
1" (3/4" ID)	EFGC-034-YE-1515-72	3/4" FIP x 3/4" FIP, 72"	EA		12



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops




NEW Automatic Safety Valve for Gas Appliances

Automatic Excess Flow Shut-off Connectors

In the case of a gas line rupture or a disconnect from the appliance, Easyflex's Gastop EFV detects the increase of gas flow and immediately shuts-off the supply of gas. Gas flow is controlled only at the appliance where the problem exists. The valve will remain activated until the gas line is replaced.

- Automatic Activation
- Simple Reset
- Battery Not Required
- 100% Performance Tested

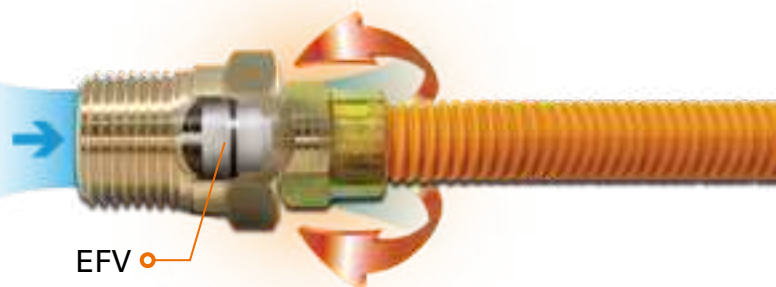

Excess Flow Valve (EFV)

Stainless Steel Flexible Gas Connectors



Product Testing

Strength Test	Withstands an internal hydrostatic pressure of 250 psi (17MPa) without bursting or leaking
Bending Test	Withstands 30 bends without leaking in depths less than 2 inches of water
Torsion Test	Withstands 15 applications of 90° twists
Durability at High Temperature Test	Withstands temperatures of up to 800°F
Strength of Fittings	Does not leak within a tightened torque of 1,040 inch-pounds

Certifications, Approvals, Listings and Compliance

United States | CSA USA Standards Association

- ANSI Z 21.24 Connectors for Gas Appliances
- ANSI Z 21.75 Connectors for Outdoor Appliances and Manufactured Homes
- ANSI Z 21.93 Excess Flow Valves for Natural and LP Gas with Pressures of Up to 5 psig

Canada | CSA Canadian Standards Association

- CSA 6.10 Connectors for Gas Appliances
- CSA 6.27 Connectors for Outdoor Appliances and Manufactured Homes
- Meets the requirements of CSA B149.1 National Gas and Propane Installation Code
- CSA 6.30 Excess Flow Valves for Natural and LP Gas with Pressures of Up to 5 psig



Sizing and Model Selection

Model No.	Connection		Rated Trip Flow Rate(kBtu/hr)			Maximum Flow Capacity(kBtu/hr)		
	Inlet	Outlet	Horizontal	Vertical Up	Vertical Down	Horizontal	Vertical Up	Vertical Down
G014-10A	1/2" MIP	3/8" OD Flare	107 @ 0.94	113 @ 0.99	103 @ 0.90	84 @ 0.50	83 @ 0.50	84 @ 0.50
G014-12A	3/8" MIP	3/8" OD Flare						
G014-11A	1/2" FIP	3/8" OD Flare						
G014-13A	3/8" FIP	3/8" OD Flare						
G038-10A	1/2" MIP	1/2" OD Flare	166 @ 0.87	149 @ 1.29	139 @ 0.63	133 @ 0.50	97 @ 0.50	123 @ 0.50
G038-12A	3/8" MIP	1/2" OD Flare						
G038-11A	1/2" FIP	1/2" OD Flare						
G038-13A	3/8" FIP	1/2" OD Flare						
G012-10A	1/2" MIP	5/8" OD Flare	202 @ 1.39	214 @ 1.24	178 @ 0.97	121 @ 0.50	105 @ 0.50	133 @ 0.50
G012-14A	3/4" MIP	5/8" OD Flare						
G012-11A	1/2" FIP	5/8" OD Flare						
G012-15A	3/4" FIP	5/8" OD Flare						

- Rated Trip Flow and Max Flow Capacity values are kBTU/max. "w.c PD (natural gas.0.64 s.g.. 1000 BTU/cu.ft.)
- A minimum of 5" w.c inlet pressure is required with a maximum inlet pressure of 14" w.c. (1/2 psig)
- Operating temperature range. -20°F ~ 150°F (-29°C ~ 66°C)
- EFV type: EFVNB
- Installation orientation: Multi-position (horizontal, vertical up, vertical down)



Certificate of Compliance

Certificate: 70056507 (238420)

Master Contract: 238420

Project: 70081678

Date Issued: 2016-08-09

Issued to: Kofulso Co., Ltd.
377-8 Gungok-Dong, Seo-Gu
Inchon City,
SOUTH KOREA
Attention: Steven Cho

The products listed below are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US' for Canada and US or with adjacent indicator 'US' for US only or without either indicator for Canada only.



Issued by: James Sekerak
James Sekerak

PRODUCTS

CLASS - C337187 - VALVES (GAS)-Excess Flow-Certified to U.S. Standards
CLASS - C337107 - VALVES (GAS)-Excess Flow

For details related to rating, size, configuration, etc. reference should be made to the CSA Certification Record or the descriptive report.

For Use With Natural and Propane Gas
For use with Natural and Liquefied Petroleum Gases

Trade Name: GASTOP

<u>Model</u>	<u>Pressure Rating</u>	<u>Inlet</u>	<u>Outlet</u>
G012-10V	1/2 psig	1/2" MIP	5/8" OD (15/16"-16 UNF-2A) flare
G012-11V	1/2 psig	1/2" FIP	5/8" OD (15/16"-16 UNF-2A) flare
G012-14V	1/2 psig	3/4" MIP	5/8" OD (15/16"-16 UNF-2A) flare
G012-15V	1/2 psig	3/4" FIP	5/8" OD (15/16"-16 UNF-2A) flare
G014-10V	1/2 psig	1/2" MIP	3/8" OD (5/8"-18 UNF-2A) flare
G014-11V	1/2 psig	1/2" FIP	3/8" OD (5/8"-18 UNF-2A) flare

Stainless Steel Flexible **Gas Connectors**



Parts Numbering System

EFGC - 012 - SS - 10A 10 - 12

TUBE ID

COATING

EFV

FITTINGS

LENGTH

TUBE ID

Part#	Size (ID)	Thread
014	1/4" ID (3/8" OD)	5/8"-18
038	3/8" ID (1/2" OD)	3/4"-16
012	1/2" ID (5/8" OD)	15/16"-16
034	3/4" ID (1" OD)	1-1/8"-16

COATING

Part#	
SS	Uncoated Stainless Steel 304
YE	Yellow Epoxy Coated Stainless Steel 304
BE	Black Epoxy Coated Stainless Steel 304

ADAPTERS/ VALVES

Part#	Size (ID)
10A	1/2" MIP EFV
11A	1/2" FIP EFV
12A	3/8" MIP EFV
13A	3/8" FIP EFV
14A	3/4" MIP EFV

LENGTH

Part#	Size (ID)	Part#
10	1/2" MIP	12"
11	1/2" FIP	18"
12	3/8" MIP	24"
13	3/8" FIP	30"
14	3/4" MIP	36"
		48"
		60"
		72"

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**




014-SS Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)

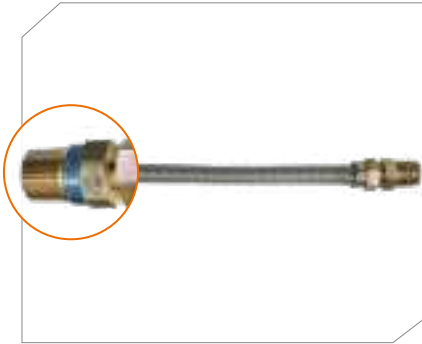


OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

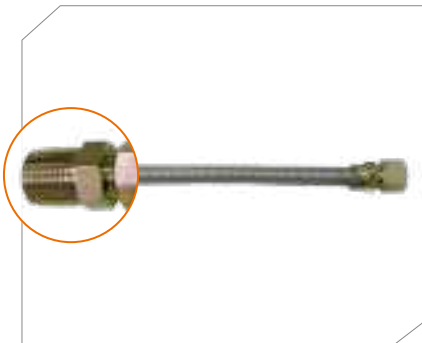

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

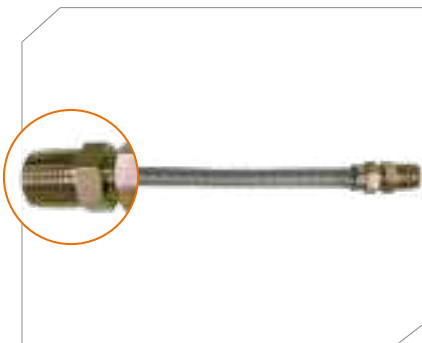

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-10A12-12	1/2" M.EFV x 3/8" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A12-18	1/2" M.EFV x 3/8" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A12-24	1/2" M.EFV x 3/8" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A12-30	1/2" M.EFV x 3/8" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A12-36	1/2" M.EFV x 3/8" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A12-48	1/2" M.EFV x 3/8" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A12-60	1/2" M.EFV x 3/8" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-10A12-72	1/2" M.EFV x 3/8" MIP, 72"	EA		12

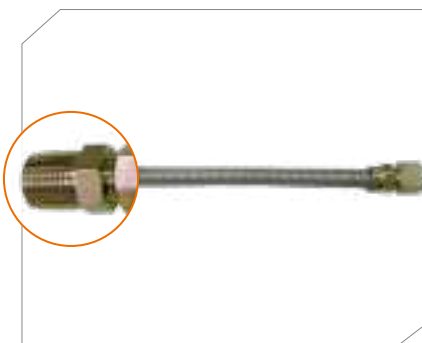

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-10A13-12	1/2" M.EFV x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A13-18	1/2" M.EFV x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A13-24	1/2" M.EFV x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A13-30	1/2" M.EFV x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A13-36	1/2" M.EFV x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A13-48	1/2" M.EFV x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-10A13-60	1/2" M.EFV x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-10A13-72	1/2" M.EFV x 3/8" FIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors




014-SS Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-12A13-12	3/8" M.EFV x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-18	3/8" M.EFV x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-24	3/8" M.EFV x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-30	3/8" M.EFV x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-36	3/8" M.EFV x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-48	3/8" M.EFV x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-60	3/8" M.EFV x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-12A13-72	3/8" M.EFV x 3/8" FIP, 72"	EA		12

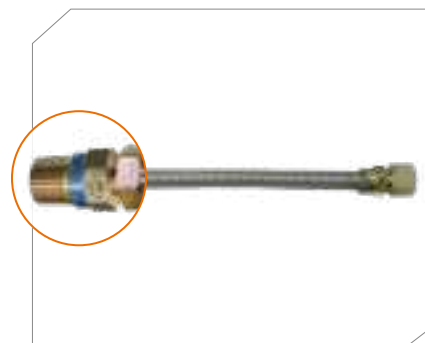

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas** Connectors




014-YE Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)

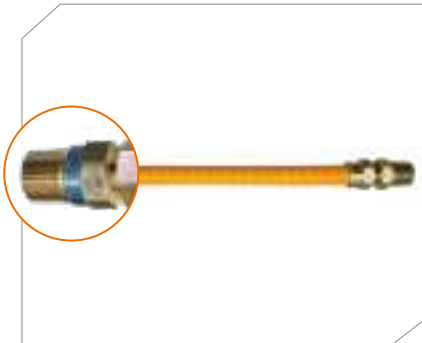


OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

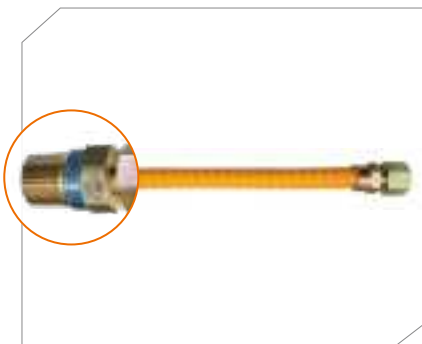

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

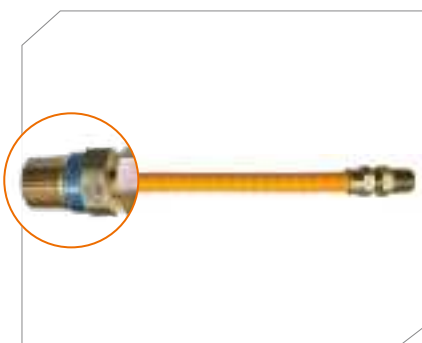

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-10A12-12	1/2" M.EFV x 3/8" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A12-18	1/2" M.EFV x 3/8" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A12-24	1/2" M.EFV x 3/8" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A12-30	1/2" M.EFV x 3/8" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A12-36	1/2" M.EFV x 3/8" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A12-48	1/2" M.EFV x 3/8" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A12-60	1/2" M.EFV x 3/8" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-10A12-72	1/2" M.EFV x 3/8" MIP, 72"	EA		12

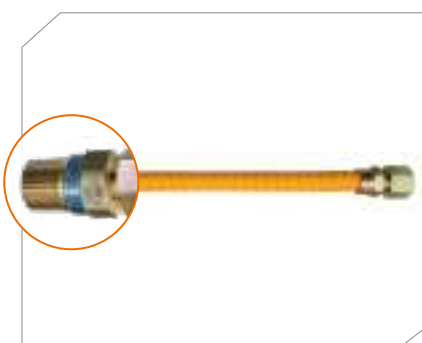

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-YE-10A13-12	1/2" M.EFV x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A13-18	1/2" M.EFV x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A13-24	1/2" M.EFV x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A13-30	1/2" M.EFV x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A13-36	1/2" M.EFV x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A13-48	1/2" M.EFV x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-YE-10A13-60	1/2" M.EFV x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-YE-10A13-72	1/2" M.EFV x 3/8" FIP, 72"	EA		12

Stainless Steel Flexible **Gas Connectors**




014-YE Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-SS-12A13-12	3/8" M.EFV x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-18	3/8" M.EFV x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-24	3/8" M.EFV x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-30	3/8" M.EFV x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-36	3/8" M.EFV x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-48	3/8" M.EFV x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-SS-12A13-60	3/8" M.EFV x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-SS-12A13-72	3/8" M.EFV x 3/8" FIP, 72"	EA		12

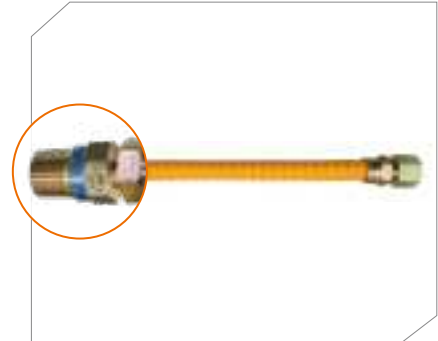

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**




014-BE Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)

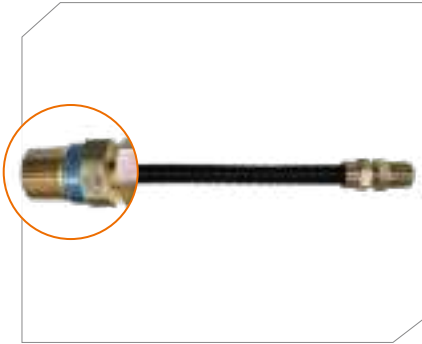


OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

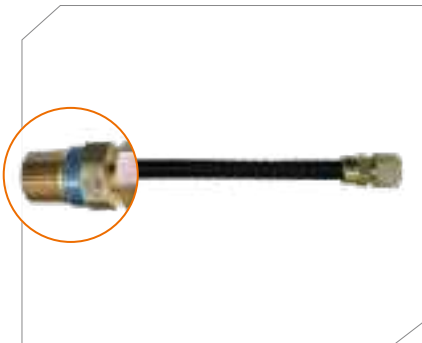

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

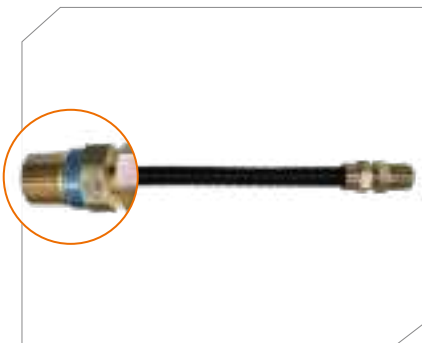

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-10A12-12	1/2" M.EFV x 3/8" MIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A12-18	1/2" M.EFV x 3/8" MIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A12-24	1/2" M.EFV x 3/8" MIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A12-30	1/2" M.EFV x 3/8" MIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A12-36	1/2" M.EFV x 3/8" MIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A12-48	1/2" M.EFV x 3/8" MIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A12-60	1/2" M.EFV x 3/8" MIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-10A12-72	1/2" M.EFV x 3/8" MIP, 72"	EA		12

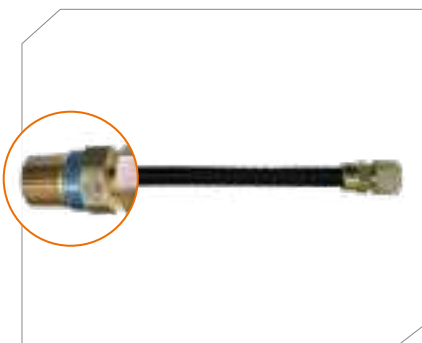

OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-10A13-12	1/2" M.EFV x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A13-18	1/2" M.EFV x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A13-24	1/2" M.EFV x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A13-30	1/2" M.EFV x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A13-36	1/2" M.EFV x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A13-48	1/2" M.EFV x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-10A13-60	1/2" M.EFV x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-10A13-72	1/2" M.EFV x 3/8" FIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors




014-BE Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
3/8" (1/4" ID)	EFGC-014-BE-12A13-12	3/8" M.EFV x 3/8" FIP, 12"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-12A13-18	3/8" M.EFV x 3/8" FIP, 18"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-12A13-24	3/8" M.EFV x 3/8" FIP, 24"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-12A13-30	3/8" M.EFV x 3/8" FIP, 30"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-12A13-36	3/8" M.EFV x 3/8" FIP, 36"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-12A13-48	3/8" M.EFV x 3/8" FIP, 48"	EA		25
3/8" (1/4" ID)	EFGC-014-BE-12A13-60	3/8" M.EFV x 3/8" FIP, 60"	EA		12
3/8" (1/4" ID)	EFGC-014-BE-12A13-72	3/8" M.EFV x 3/8" FIP, 72"	EA		12

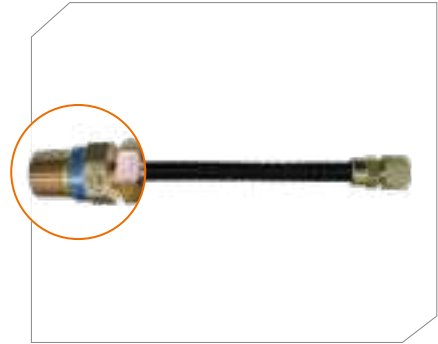

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**




038-SS Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)

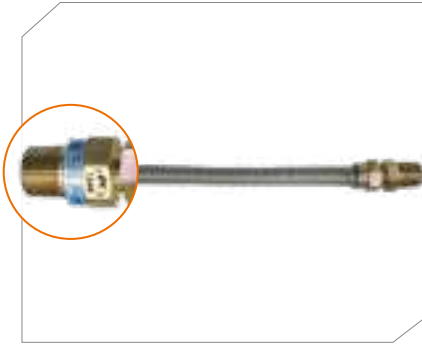

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

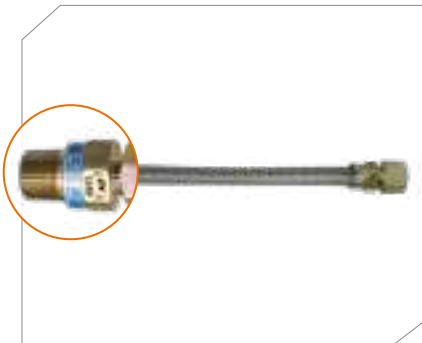

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

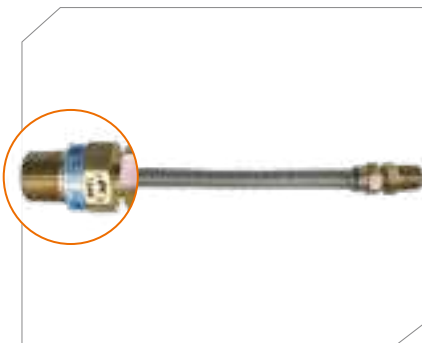

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8" ID)	EFGC-038-SS-10A12-12	1/2" M.EFV x 3/8" MIP, 12"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A12-18	1/2" M.EFV x 3/8" MIP, 18"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A12-24	1/2" M.EFV x 3/8" MIP, 24"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A12-30	1/2" M.EFV x 3/8" MIP, 30"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A12-36	1/2" M.EFV x 3/8" MIP, 36"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A12-48	1/2" M.EFV x 3/8" MIP, 48"	EA		25
1/2" (3/8" ID)	EFGC-038-SS-10A12-60	1/2" M.EFV x 3/8" MIP, 60"	EA		12
1/2" (3/8" ID)	EFGC-038-SS-10A12-72	1/2" M.EFV x 3/8" MIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors





038-SS Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-SS-10A13-12	1/2" M.EFV x 3/8" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-10A13-18	1/2" M.EFV x 3/8" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-10A13-24	1/2" M.EFV x 3/8" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-10A13-30	1/2" M.EFV x 3/8" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-10A13-36	1/2" M.EFV x 3/8" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-10A13-48	1/2" M.EFV x 3/8" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-10A13-60	1/2" M.EFV x 3/8" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-SS-10A13-72	1/2" M.EFV x 3/8" FIP, 72"	EA		12

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-SS-12A13-12	3/8" M.EFV x 3/8" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-12A13-18	3/8" M.EFV x 3/8" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-12A13-24	3/8" M.EFV x 3/8" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-12A13-30	3/8" M.EFV x 3/8" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-12A13-36	3/8" M.EFV x 3/8" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-12A13-48	3/8" M.EFV x 3/8" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-SS-12A13-60	3/8" M.EFV x 3/8" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-SS-12A13-72	3/8" M.EFV x 3/8" FIP, 72"	EA		12

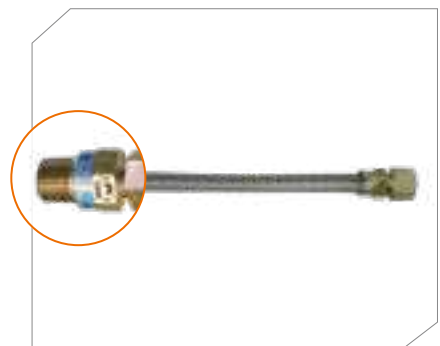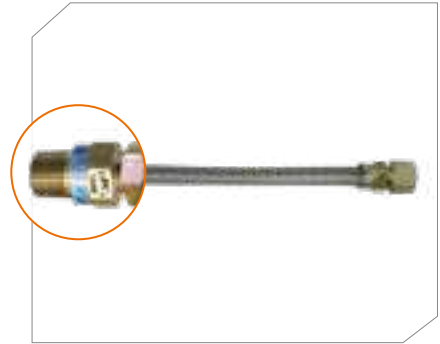

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**




038-YE Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)

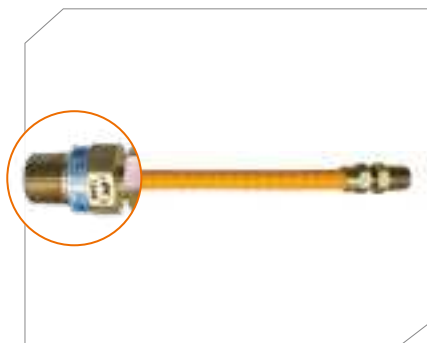

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-YE-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-YE-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

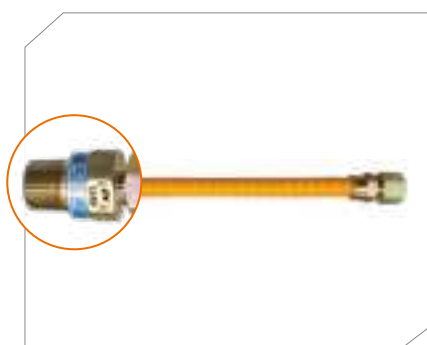

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-YE-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-YE-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

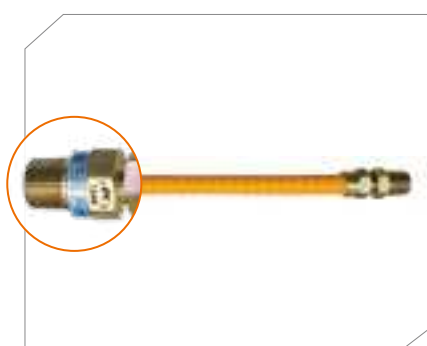

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-YE-10A12-12	1/2" M.EFV x 3/8" MIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A12-18	1/2" M.EFV x 3/8" MIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A12-24	1/2" M.EFV x 3/8" MIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A12-30	1/2" M.EFV x 3/8" MIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A12-36	1/2" M.EFV x 3/8" MIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A12-48	1/2" M.EFV x 3/8" MIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A12-60	1/2" M.EFV x 3/8" MIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-YE-10A12-72	1/2" M.EFV x 3/8" MIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors





038-YE Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-YE-10A13-12	1/2" M.EFV x 3/8" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A13-18	1/2" M.EFV x 3/8" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A13-24	1/2" M.EFV x 3/8" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A13-30	1/2" M.EFV x 3/8" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A13-36	1/2" M.EFV x 3/8" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A13-48	1/2" M.EFV x 3/8" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-10A13-60	1/2" M.EFV x 3/8" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-YE-10A13-72	1/2" M.EFV x 3/8" FIP, 72"	EA		12

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-YE-12A13-12	3/8" M.EFV x 3/8" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-12A13-18	3/8" M.EFV x 3/8" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-12A13-24	3/8" M.EFV x 3/8" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-12A13-30	3/8" M.EFV x 3/8" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-12A13-36	3/8" M.EFV x 3/8" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-12A13-48	3/8" M.EFV x 3/8" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-YE-12A13-60	3/8" M.EFV x 3/8" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-YE-12A13-72	3/8" M.EFV x 3/8" FIP, 72"	EA		12

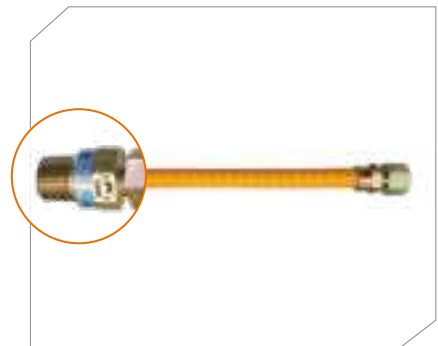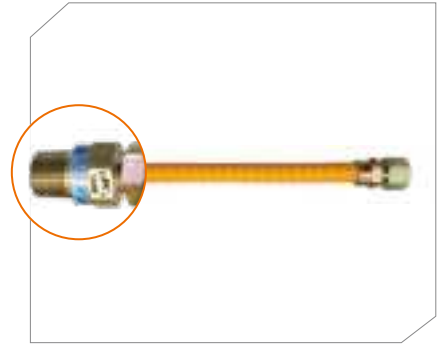

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas** Connectors




038-BE Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)

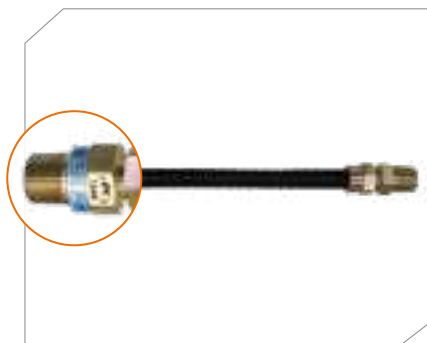

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-BE-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-BE-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

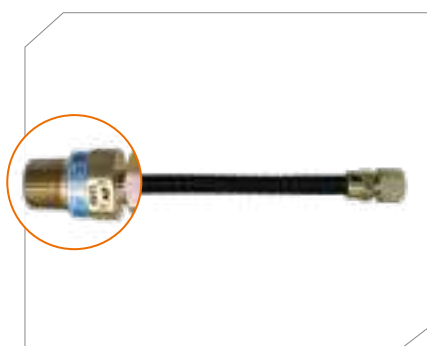

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-BE-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-BE-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

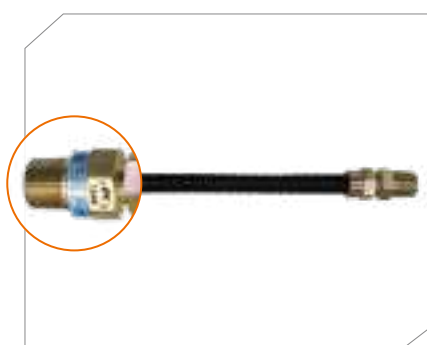

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-BE-10A12-12	1/2" M.EFV x 3/8" MIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A12-18	1/2" M.EFV x 3/8" MIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A12-24	1/2" M.EFV x 3/8" MIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A12-30	1/2" M.EFV x 3/8" MIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A12-36	1/2" M.EFV x 3/8" MIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A12-48	1/2" M.EFV x 3/8" MIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A12-60	1/2" M.EFV x 3/8" MIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-BE-10A12-72	1/2" M.EFV x 3/8" MIP, 72"	EA		12

Stainless Steel Flexible **Gas Connectors**





038-BE Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Coating : Black Epoxy
- Fitting : Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-BE-10A13-12	1/2" M.EFV x 3/8" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A13-18	1/2" M.EFV x 3/8" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A13-24	1/2" M.EFV x 3/8" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A13-30	1/2" M.EFV x 3/8" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A13-36	1/2" M.EFV x 3/8" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A13-48	1/2" M.EFV x 3/8" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-10A13-60	1/2" M.EFV x 3/8" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-BE-10A13-72	1/2" M.EFV x 3/8" FIP, 72"	EA		12

OD	Part #	Description	U/M	Price	Qty/ Box
1/2" (3/8 "ID)	EFGC-038-BE-12A13-12	3/8" M.EFV x 3/8" FIP, 12"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-12A13-18	3/8" M.EFV x 3/8" FIP, 18"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-12A13-24	3/8" M.EFV x 3/8" FIP, 24"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-12A13-30	3/8" M.EFV x 3/8" FIP, 30"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-12A13-36	3/8" M.EFV x 3/8" FIP, 36"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-12A13-48	3/8" M.EFV x 3/8" FIP, 48"	EA		25
1/2" (3/8 "ID)	EFGC-038-BE-12A13-60	3/8" M.EFV x 3/8" FIP, 60"	EA		12
1/2" (3/8 "ID)	EFGC-038-BE-12A13-72	3/8" M.EFV x 3/8" FIP, 72"	EA		12

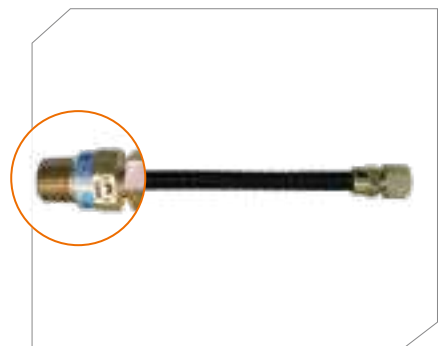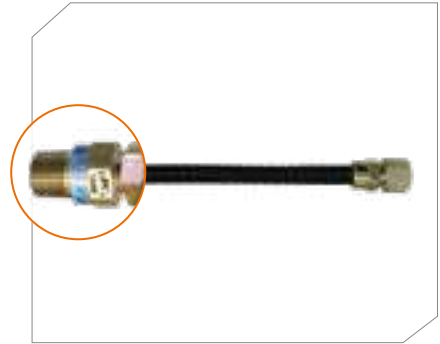

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings


Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**




012-SS Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)

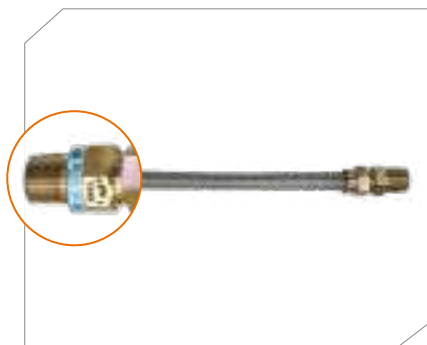

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

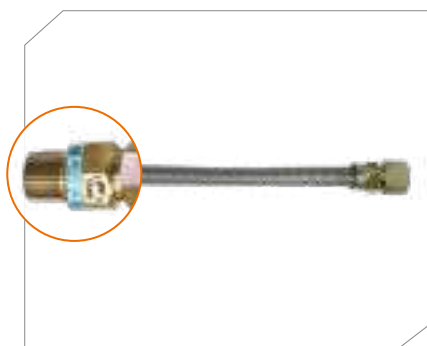

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

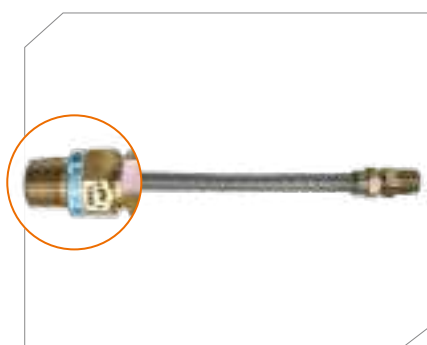

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-10A14-12	1/2" M.EFV x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A14-18	1/2" M.EFV x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A14-24	1/2" M.EFV x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A14-30	1/2" M.EFV x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A14-36	1/2" M.EFV x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A14-48	1/2" M.EFV x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A14-60	1/2" M.EFV x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-10A14-72	1/2" M.EFV x 3/4" MIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors




012-SS Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)




OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-10A15-12	1/2" M.EFV x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A15-18	1/2" M.EFV x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A15-24	1/2" M.EFV x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A15-30	1/2" M.EFV x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A15-36	1/2" M.EFV x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A15-48	1/2" M.EFV x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-10A15-60	1/2" M.EFV x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-10A15-72	1/2" M.EFV x 3/4" FIP, 72"	EA		12

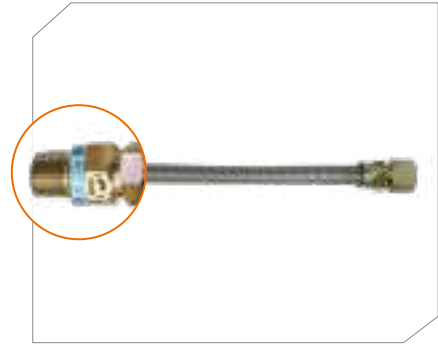

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-14A14-12	3/4" M.EFV x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A14-18	3/4" M.EFV x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A14-24	3/4" M.EFV x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A14-30	3/4" M.EFV x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A14-36	3/4" M.EFV x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A14-48	3/4" M.EFV x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A14-60	3/4" M.EFV x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-14A14-72	3/4" M.EFV x 3/4" MIP, 72"	EA		12

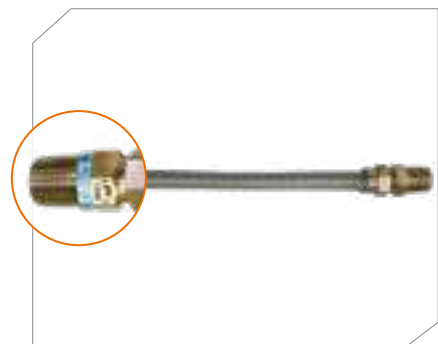

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-SS-14A15-12	3/4" M.EFV x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A15-18	3/4" M.EFV x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A15-24	3/4" M.EFV x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A15-30	3/4" M.EFV x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A15-36	3/4" M.EFV x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A15-48	3/4" M.EFV x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-SS-14A15-60	3/4" M.EFV x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-SS-14A15-72	3/4" M.EFV x 3/4" FIP, 72"	EA		12

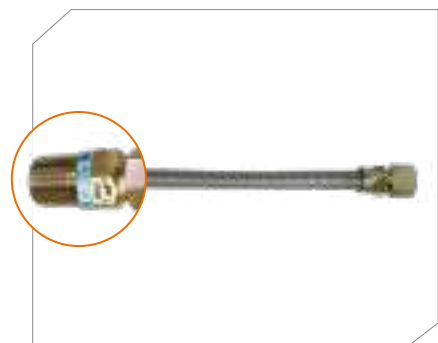

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings




Flexible
Sprinkler
Drops

Stainless Steel Flexible **Gas Connectors**



012-YE Series Connector with Fittings / EFV

- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)

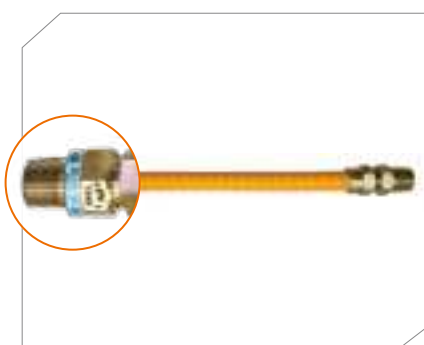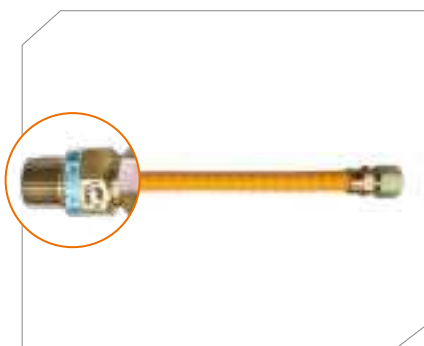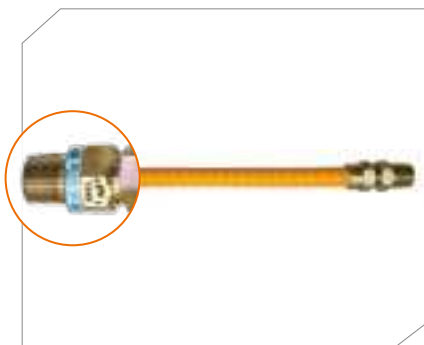

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-10A10-12	1/2" M.EFV x 1/2" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A10-18	1/2" M.EFV x 1/2" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A10-24	1/2" M.EFV x 1/2" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A10-30	1/2" M.EFV x 1/2" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A10-36	1/2" M.EFV x 1/2" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A10-48	1/2" M.EFV x 1/2" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A10-60	1/2" M.EFV x 1/2" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-10A10-72	1/2" M.EFV x 1/2" MIP, 72"	EA		12

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-10A11-12	1/2" M.EFV x 1/2" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A11-18	1/2" M.EFV x 1/2" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A11-24	1/2" M.EFV x 1/2" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A11-30	1/2" M.EFV x 1/2" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A11-36	1/2" M.EFV x 1/2" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A11-48	1/2" M.EFV x 1/2" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A11-60	1/2" M.EFV x 1/2" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-10A11-72	1/2" M.EFV x 1/2" FIP, 72"	EA		12

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-10A14-12	1/2" M.EFV x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A14-18	1/2" M.EFV x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A14-24	1/2" M.EFV x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A14-30	1/2" M.EFV x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A14-36	1/2" M.EFV x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A14-48	1/2" M.EFV x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A14-60	1/2" M.EFV x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-10A14-72	1/2" M.EFV x 3/4" MIP, 72"	EA		12

Stainless Steel Flexible **Gas** Connectors




012-YE Series Connector with Fittings / EFV


- Tube : Stainless Steel
- Coating : Yellow Epoxy
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)




OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-10A15-12	1/2" M.EFV x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A15-18	1/2" M.EFV x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A15-24	1/2" M.EFV x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A15-30	1/2" M.EFV x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A15-36	1/2" M.EFV x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A15-48	1/2" M.EFV x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-10A15-60	1/2" M.EFV x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-10A15-72	1/2" M.EFV x 3/4" FIP, 72"	EA		12

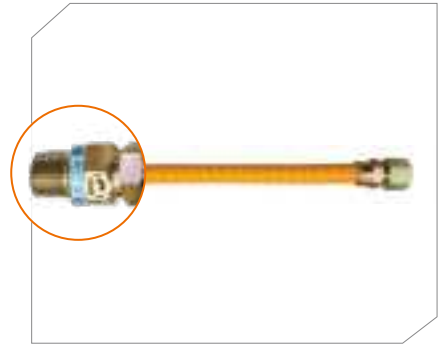

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-14A14-12	3/4" M.EFV x 3/4" MIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A14-18	3/4" M.EFV x 3/4" MIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A14-24	3/4" M.EFV x 3/4" MIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A14-30	3/4" M.EFV x 3/4" MIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A14-36	3/4" M.EFV x 3/4" MIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A14-48	3/4" M.EFV x 3/4" MIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A14-60	3/4" M.EFV x 3/4" MIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-14A14-72	3/4" M.EFV x 3/4" MIP, 72"	EA		12

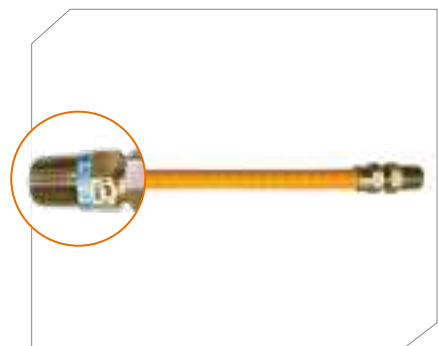

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-YE-14A15-12	3/4" M.EFV x 3/4" FIP, 12"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A15-18	3/4" M.EFV x 3/4" FIP, 18"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A15-24	3/4" M.EFV x 3/4" FIP, 24"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A15-30	3/4" M.EFV x 3/4" FIP, 30"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A15-36	3/4" M.EFV x 3/4" FIP, 36"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A15-48	3/4" M.EFV x 3/4" FIP, 48"	EA		25
5/8" (1/2" ID)	EFGC-012-YE-14A15-60	3/4" M.EFV x 3/4" FIP, 60"	EA		12
5/8" (1/2" ID)	EFGC-012-YE-14A15-72	3/4" M.EFV x 3/4" FIP, 72"	EA		12

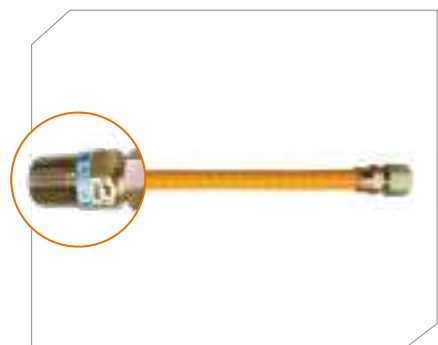

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Gas Fittings

3/8" OD Flare Gas Fittings | Flare Adapter

- Zinc-Plated Steel S45C
- 5/8-18 Thread
- 3/8" OD (1/4" ID)



OD	Part #	Description	U/M	Price	Qty/Box
3/8" (1/4" ID)	G014-10	3/8" OD Flare x 1/2" MIP	EA		
3/8" (1/4" ID)	G014-12	3/8" OD Flare x 3/8" MIP	EA		
OD	Part #	Description	U/M	Price	Qty/Box
3/8" (1/4" ID)	G014-11	3/8" OD Flare x 1/2" FIP	EA		
3/8" (1/4" ID)	G014-13	3/8" OD Flare x 3/8" FIP	EA		

1/2" OD Flare Gas Fittings | Flare Adapter

- Zinc-Plated Steel S45C
- 3/4-16 Thread
- 1/2" OD (3/8" ID)



OD	Part #	Description	U/M	Price	Qty/Box
1/2" (3/8" ID)	G038-10	1/2" OD Flare x 1/2" MIP	EA		
1/2" (3/8" ID)	G038-12	1/2" OD Flare x 3/8" MIP	EA		
1/2" (3/8" ID)	G038-14	1/2" OD Flare x 3/4" MIP	EA		
OD	Part #	Description	U/M	Price	Qty/Box
1/2" (3/8" ID)	G038-11	1/2" OD Flare x 1/2" FIP	EA		
1/2" (3/8" ID)	G038-13	1/2" OD Flare x 3/8" FIP	EA		

5/8" OD Flare Gas Fittings | Flare Adapter

- Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/Box
5/8" (1/2" ID)	G012-10	5/8" OD Flare x 1/2" MIP	EA		
5/8" (1/2" ID)	G012-14	5/8" OD Flare x 3/4" MIP	EA		
OD	Part #	Description	U/M	Price	Qty/Box
5/8" (1/2" ID)	G012-11	5/8" OD Flare x 1/2" FIP	EA		
5/8" (1/2" ID)	G012-15	5/8" OD Flare x 3/4" FIP	EA		

Gas Fittings

1" OD Flare Gas Fittings | Flare Adapter

- Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 1" OD (3/4" ID)

OD	Part #	Description	U/M	Price	Qty/Box
1" (3/4" ID)	G034-14	1" OD Flare x 3/4" MIP	EA		
1" (3/4" ID)	G034-16	1" OD Flare x 1" MIP	EA		
OD	Part #	Description	U/M	Price	Qty/Box
1" (3/4" ID)	G034-15	1" OD Flare x 3/4" FIP	EA		
1" (3/4" ID)	G034-17	1" OD Flare x 1" FIP	EA		



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Gas Fittings

3/8" OD Flare EFV Gas Fittings | Flare Excess Flow Valve



- Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 3/8" OD (1/4" ID)

OD	Part #	Description	U/M	Price	Qty/Box
3/8" (1/4" ID)	G014-10A	3/8" OD Flare x 1/2" M.EFV	EA		



OD	Part #	Description	U/M	Price	Qty/Box
3/8" (1/4" ID)	G014-13A	3/8" OD Flare x 3/8" FEFV	EA		



1/2" OD Flare EFV Gas Fittings | Flare Excess Flow Valve

- Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 1/2" OD (3/8" ID)

OD	Part #	Description	U/M	Price	Qty/Box
1/2" (3/8" ID)	G038-10A	1/2" OD Flare x 1/2" M.EFV	EA		



5/8" OD Flare Gas Fittings | Flare Excess Flow Valve

- Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 5/8" OD (1/2" ID)

OD	Part #	Description	U/M	Price	Qty/Box
5/8" (1/2" ID)	G012-10A	5/8" OD Flare x 1/2" M.EFV	EA		
5/8" (1/2" ID)	G012-14A	5/8" OD Flare x 3/4" M.EFV	EA		



Gas Valves

Straight Ball Valves | FIP x FIP

- Brass Body
- Lever Handle
- For use with liquified petroleum, LP and natural gas, and air mixtures up to 175 PSI
- FIP x FIP



OD	Part #	Description	U/M	Price	Qty/Box
5/8" (1/2" ID)	GV-012	1/2" FIP x 1/2" FIP, Red Handle	EA		
1" (3/4" ID)	GV-034	3/4" FIP x 3/4" FIP, Red Handle	EA		
1 1/4" (1" ID)	GV-100	1" FIP x 1" FIP, Red Handle	EA		
OD	Part #	Description	U/M	Price	Qty/Box
5/8" (1/2" ID)	GV-012-YE	1/2" FIP x 1/2" FIP, Yellow Handle	EA		
1" (3/4" ID)	GV-034-YE	3/4" FIP x 3/4" FIP, Yellow Handle	EA		
1 1/4" (1" ID)	GV-100-YE	1" FIP x 1" FIP, Yellow Handle	EA		

Gas Ball Valves | Flare x FIP

- Brass Body
- Lever Handle
- For use with liquified petroleum, LP and natural gas, and air mixtures up to 175 PSI



OD	Part #	Description	UM	Price	Qty/Box
3/8" (1/4" ID)	G014-31	3/8" OD Flare x 1/2" FIP	EA		
1/2" (3/8" ID)	G038-31	1/2" OD Flare x 1/2" FIP	EA		
1/2" (3/8" ID)	G038-33	1/2" OD Flare x 3/4" FIP	EA		
5/8" (1/2" ID)	G012-31	5/8" OD Flare x 1/2" FIP	EA		
5/8" (1/2" ID)	G012-33	5/8" OD Flare x 3/4" FIP	EA		

Gas Angle Valves | Flare x FIP

- Brass Body
- Lever Handle
- For use with liquified petroleum, LP and Natural gas, and air mixtures up to 175 PSI



OD	Part #	Description	U/M	Price	Qty/Box
1/2" (3/8" ID)	G038-41	1/2" OD Flare x 1/2" FIP	EA		
5/8" (1/2" ID)	G012-41	5/8" OD Flare x 1/2" FIP	EA		
5/8" (1/2" ID)	G012-43	5/8" OD Flare x 3/4" FIP	EA		

Easy to Use Handle

- Handles are ergonomically designed for smooth turns.
- Quarter-turn handle design allows for easy on/off operation.
- The forged brass body eliminates the possibility of leaks typically associated with cast products.
- All valves are 100% leak tested.

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops



MaxTrap

GAS CONNECTION SEDIMENT TRAP
REMOVES SOLID PARTICLES

Gas Connection **Sediment Trap**

Features and Benefits

- Removes solid particles
- Made from carbon steel
- Zinc-plated for corrosion resistance
- Full port for uninterrupted operation
- One piece design eliminates leak points
- 100% factory-tested for optimal performance

Materials

Body	Carbon Steel
Coating	Zinc-Plated



1/2" MaxTrap **Sediment Trap**

- Body: Carbon Steel
- Coating: Zinc
- Full Port

Part #	Description	U/M	Price	Qty/ Box
EFG-TP-012	MaxTrap 1/2"- Gas Pipe Connection Sediment Trap	EA		1



3/4" MaxTrap **Sediment Trap**

- Body: Carbon Steel
- Coating: Zinc
- Full Port

Part #	Description	U/M	Price	Qty/ Box
EFG-TP-034	MaxTrap 3/4"- Gas Pipe Connection Sediment Trap	EA		1

A close-up photograph of several yellow gas connectors. The connectors have a braided stainless steel inner tube and a yellow PVC outer coating. They feature hexagonal stainless steel fittings with threaded ends. One fitting in the foreground has a logo that reads "SPC[®] US". Another fitting in the background has "1/2\"/>

Commercial Food Service Gas Connectors

Braided Stainless Steel for durability, PVC coated for sanitation,
and 360° rotational fittings for free movement.



Commercial Food Service Gas Connectors

Applications

- Movable Caster-Mounted Gas Appliances
- Stationary Gas Appliances
- Stationary Countertop Gas Appliances

Benefits

- Braided Stainless Steel Construction
- PVC Coated
- 360° Rotational Fittings

Certifications & Approvals

- ANSI Z21.69 / CSA 6.16 Connectors for Movable Gas Appliances

NOTE: A restraining device is required for all movable gas equipment.



Materials

Tubing	Stainless Steel 304 (ASTM A240)
Braid	Stainless Steel 304 (ASTM A240)
Coating	Yellow or Black PVC
Fitting	Zinc-Plated Steel S45C

Pressure-Temperature

Rated Operating Temperature	-40°F to 150°F (-40°C to 65°C)
Rated Pressure	0.5 psi

Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Commercial Food Service **Gas Connectors**



Certificate of Compliance

Certificate: 1992377

Master Contract: 238420

Project: 1992377

Date Issued: 2008/02/19

Issued to: **Kofuho Co., Ltd.**
377-8 Gungok-Dong, Seo-Gu
Inchon City,
South Korea

The products listed below are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US'



Issued by: Russell Dworznik

Authorized by: Trevor Perera, Manager of
Certification Services

Trevor Perera

PRODUCTS

- CLASS 3303 86** - CONNECTORS (GAS) - Gas Appliances and - Manufactured Homes-Certified to US Standards
- CLASS 3303 06** - CONNECTORS (GAS) - Outdoor Gas Appliances - and Manufactured Homes
- CLASS 3303 85** - CONNECTORS (GAS) - For Moveable Appliances-Certified to U.S. Standards
- CLASS 3303 05** - CONNECTORS (GAS) - For Moveable Appliances
- CLASS 3303 81** - CONNECTORS (GAS) - Connectors For Gas Appliances-Certified to U.S. Standards
- CLASS 3303 01** - CONNECTORS (GAS) - Connectors For Gas Appliances

The 'C' and 'US' indicators adjacent to the CSA Mark signify that the product has been evaluated to the applicable CSA and ANSI/UL Standards, for use in Canada and the U.S., respectively. This 'US' indicator includes products eligible to bear the 'NRTL' indicator. NRTL, i.e. National Recognized Testing Laboratory, is a designation granted by the U.S. Occupational Safety and Health Administration (OSHA) to laboratories which have been recognized to perform certification to U.S. Standards.

Commercial Food Service **Gas Connectors**

Commercial Food Service Gas Connector Installation Guide


Please read the following instructions carefully. Failure to read, comply, and follow these instructions may result in severe injury or death.

CAUTIONS AND WARNINGS

- The installation **MUST BE** compliant with the National Fuel Gas Code (ANSI Z223.1) and local gas installation codes.
- Installation and testing **MUST BE** performed by qualified personnel. Make sure that the gas supply and all the appliance gas valves are shut-off before connecting to the gas supply.
- Gas outlet must be in the same room as the appliance and the connector must not be concealed within or run through any wall, floor, or partition. Gas connections shall not be in contact with surfaces of temperatures in excess of 110°C (230°F), sharp edges or wiring.
- The final assembly must be tested for leaks after installation. Open flame or any sources of ignition must not be used for the testing. Leak test solutions may cause corrosion and **WATER RINSE AFTER TESTING**. To check leakage on the gas supply piping system, see National Fuel Gas Code Z223.1, NFPA 54 or CSA B149.1, Natural Gas and Propane Gas Installation Code. If odor of gas is detected, turn off the gas to the appliance and have a qualified professional fix the source of the leak.
- **STRONG CLEANING SOLUTIONS OR CHEMICAL SUBSTANCES MUST NOT COME IN CONTACT WITH THE CONNECTOR.** These may include acids, solvents, fluxes with zinc chloride, or other chlorinated chemicals. In case of contact, rinse down the connector with water and dry thoroughly.
- An accessible manual shut-off valve must be installed at the outlet of the gas supply piping system upstream of the connector.
- Contact with foreign objects, wiring or substances must be avoided.
- Avoid movement after installation on fixed appliances.
- Bending or flexing of connectors on moveable appliances (e.g. those factory equipped with casters) should be limited to pulling and pushing the appliance in or out for cleaning or maintenance.
- Connectors are for use only on piping systems having fuel gas pressure not in excess of 1/2 psi (3.5 kPa). Flexible connections are suitable for use with 1st, 2nd and 3rd family gases only on piping systems operating at a pressure not exceeding 50 mbar.
- **DO NOT REUSE ON ANOTHER APPLIANCE OR AT ANOTHER LOCATION.**
In addition to the main gas supply shut-off valve, an approved accessible manual gas shut-off valve **MUST BE** installed upstream of the gas connector (within 6 feet of the equipment it serves). Each piece of equipment must have its own shut-off valve.
- **DO NOT USE** the quick-disconnect coupling as the primary gas Shut-off.
- The quick disconnect **MUST BE INSTALLED** so that the gas enters the coupling half and exits the nipple half. You must follow the flow direction arrows that are permanently marked on the coupling.
- **NEVER INSERT** screwdrivers, probes, etc. into the quick disconnect coupling. The valve seat can be damaged or forced off center.
- The connector shall not be kinked, twisted, or torqued when installed.
- Make sure that all fittings are tightened properly. When installing an Easyflex® connector, two 14 inch adjustable wrenches (minimum size) are recommended as installation tools.
- Adequate means must be provided to limit the movement of appliances with wheels. A restraining device is **REQUIRED** for all types of moveable gas appliances.
- When installing an equipment line-up with dual fed front manifold gas inlets, **DO NOT** use a quick-disconnect coupling.
- Appliance **MUST BE** disconnected prior to maximum movement. **DO NOT OVEREXTEND** the gas connector assembly.

Commercial Food Service **Gas Connectors**

Movable Appliance Gas Connectors

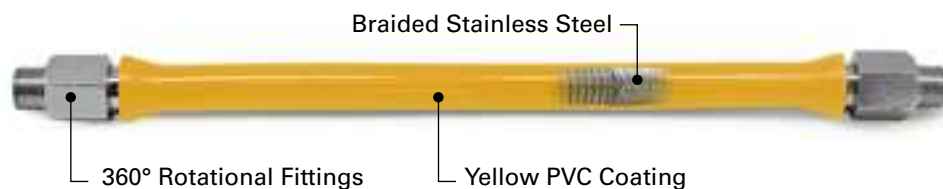

Specifications

- CSSTubing : Stainless Steel 304 (ASTM A 240)
- Fittings : Zinc-Plated Steel S45C
- Braid : Stainless Steel 304 (ASTM A 240)
- Coating : Non-Flammable Yellow PVC
- Max. Operating Pressure : 0.5 psi
- For Indoor Use Only

Certifications & Approvals

ANSI Z 21.69 / CSA 6.16 Connectors for Movable Gas Appliances.

NOTE: A restraining device is required for all movable gas equipment.



Connector Minimum Flow Capacity

Straight Length Capacity (BTU/Hr., 0.64 SpGr., 1,000 BTU per cubic ft. at 0.5" W.C. pressure drop)

Series	ID	OD	12"	18"	24"	30"	36"	48"	60"	72"
012	1/2"	5/8"	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
034	3/4"	1"	-	-	290,900	270,500	255,900	215,900	197,400	173,900
100	1"	1 1/4"	-	-	581,800	545,200	515,900	442,700	398,900	347,300

The above flow capacities are the minimum performance requirements.
Easyflex Gas Connectors exceed these minimum flow capacity requirements.

Commercial Food Service **Gas Connectors**

012-BJ Series Connector with Rotational Fittings

- Food Service Gas Connector
- Tube : Braided Stainless Steel Construction (ASTM A 240)
- Yellow PVC Coating
- Fittings : Zinc-Plated Steel S45C
- 360° Rotational Fittings
- 5/8" OD (1/2" ID)

OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-BJ-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		20
5/8" (1/2" ID)	EFGC-012-BJ-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		20
5/8" (1/2" ID)	EFGC-012-BJ-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		20
5/8" (1/2" ID)	EFGC-012-BJ-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		20



034-BJ Series Connector with Rotational Fittings

- Food Service Gas Connector
- Tube : Braided Stainless Steel Construction (ASTM A 240)
- Yellow PVC Coating
- Fittings : Zinc-Plated Steel S45C
- 360° Rotational Ends
- 1" OD (3/4" ID)

OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-BJ-1414-24	3/4" MIP x 3/4" MIP, 24"	EA		20
1" (3/4" ID)	EFGC-034-BJ-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		20
1" (3/4" ID)	EFGC-034-BJ-1414-48	3/4" MIP x 3/4" MIP, 48"	EA		20
1" (3/4" ID)	EFGC-034-BJ-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		20
1" (3/4" ID)	EFGC-034-BJ-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		20



100-BJ Series Connector with Rotational Fittings

- Food Service Gas Connector
- Tube : Braided Stainless Steel Construction (ASTM A 240)
- Yellow PVC Coating
- Fittings : Zinc-Plated Steel S45C
- 360° Rotational Ends
- 1-1/4" OD (1" ID)

OD	Part #	Description	U/M	Price	Qty/ Box
1 1/4" (1" ID)	EFGC-100-BJ-1616-24	1" MIP x 1" MIP, 24"	EA		20
1 1/4" (1" ID)	EFGC-100-BJ-1616-36	1" MIP x 1" MIP, 36"	EA		20
1 1/4" (1" ID)	EFGC-100-BJ-1616-48	1" MIP x 1" MIP, 48"	EA		20
1 1/4" (1" ID)	EFGC-100-BJ-1616-60	1" MIP x 1" MIP, 60"	EA		20



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Commercial Food Service **Gas Connectors**

Countertop Appliance Gas Connectors



Specifications

- CSST Tubing : Stainless Steel 304 (ASTM A 240)
- Fittings : Zinc-Plated Steel S45C
- Braid : Stainless Steel 304 (ASTM A 240)
- Coating : Yellow PVC

Certifications & Approvals

ANSI Z 21.24 / CSA 6.10
ANSI Z 21.75 / CSA 6.27



Connector Minimum Flow Capacity

Straight Length Capacity (BTU/Hr., 0.64 SpGr., 1,000 BTU per cubic ft. at 0.5" W.C. pressure drop)

Series	ID	OD	12"	18"	24"	30"	36"	48"	60"	72"
014	1/4"	3/8"	48,000	43,800	40,000	36,400	33,400	28,300	24,900	23,100
038	3/8"	1/2"	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
012	1/2"	5/8"	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
034	3/4"	1"	290,900	290,900	290,900	270,500	255,900	215,000	197,400	173,900

The above flow capacities are the minimum performance requirements per ANSI Z 21.24/ CSA 6.10 and ANSI Z 21.75/ CSA 6.27

Easyflex Gas Connectors exceed these minimum flow capacity requirements.

Commercial Food Service **Gas Connectors**

012-BJC Series Connector with Fittings


- Tube : Braided Stainless Steel Construction
- Yellow PVC Coating
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-BJC-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		20
5/8" (1/2" ID)	EFGC-012-BJC-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		20



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-BJC-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		20
5/8" (1/2" ID)	EFGC-012-BJC-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		20



034-BJC Series Connector with Fittings

- Tube : Braided Stainless Steel Construction
- Yellow PVC Coating
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 1" OD (3/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-BJC-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		20
1" (3/4" ID)	EFGC-034-BJC-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		20
1" (3/4" ID)	EFGC-034-BJC-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		20



Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks


No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Commercial Food Service **Gas Connectors**

Stationary Appliance Gas Connectors



Specifications

- CSST Tubing : Stainless Steel 304 (ASTM A 240)
- Fittings : Zinc-Plated Steel S45C
- Coating : Black PVC

Certifications & Approvals

ANSI Z 21.24 / CSA 6.10

ANSI Z 21.75 / CSA 6.27



Connector Minimum Flow Capacity

Straight Length Capacity (BTU/Hr., 0.64 SpGr., 1,000 BTU per cubic ft. at 0.5" W.C. pressure drop)

Series	ID	OD	12"	18"	24"	30"	36"	48"	60"	72"
014	1/4"	3/8"	48,000	43,800	40,000	36,400	33,400	28,300	24,900	23,100
038	3/8"	1/2"	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
012	1/2"	5/8"	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
034	3/4"	1"	290,900	290,900	290,900	270,500	255,900	215,900	197,400	173,900

The above flow capacities are the minimum performance requirements per ANSI Z 21.24/ CSA 6.10 and ANSI Z 21.75/ CSA 6.27

Easyflex Gas Connectors exceed these minimum flow capacity requirements.

Commercial Food Service **Gas Connectors**

012-BES Series Connector with Fittings

- Tube : Stainless Steel
- Black PVC Coating
- Fitting : Zinc-Plated Steel S45C
- 15/16-16 Thread
- 5/8" OD (1/2" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-BES-1010-24	1/2" MIP x 1/2" MIP, 24"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1010-36	1/2" MIP x 1/2" MIP, 36"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1010-48	1/2" MIP x 1/2" MIP, 48"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1010-60	1/2" MIP x 1/2" MIP, 60"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1010-72	1/2" MIP x 1/2" MIP, 72"	EA		20



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-012-BES-1011-24	1/2" MIP x 1/2" FIP, 24"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1011-36	1/2" MIP x 1/2" FIP, 36"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1011-48	1/2" MIP x 1/2" FIP, 48"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1011-60	1/2" MIP x 1/2" FIP, 60"	EA		20
5/8" (1/2" ID)	EFGC-012-BES-1011-72	1/2" MIP x 1/2" FIP, 72"	EA		20



034-BES Series Connector with Fittings

- Tube : Stainless Steel
- Black PVC Coating
- Fitting : Zinc-Plated Steel S45C
- 1-1/8-16 Thread
- 1" OD (3/4" ID)



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-BES-1414-24	3/4" MIP x 3/4" MIP, 24"	EA		20
1" (3/4" ID)	EFGC-034-BES-1414-36	3/4" MIP x 3/4" MIP, 36"	EA		20
1" (3/4" ID)	EFGC-034-BES-1414-48	3/4" MIP x 3/4" MIP, 48"	EA		20
1" (3/4" ID)	EFGC-034-BES-1414-60	3/4" MIP x 3/4" MIP, 60"	EA		20
1" (3/4" ID)	EFGC-034-BES-1414-72	3/4" MIP x 3/4" MIP, 72"	EA		20



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-BES-1415-24	3/4" MIP x 3/4" FIP, 24"	EA		20
1" (3/4" ID)	EFGC-034-BES-1415-36	3/4" MIP x 3/4" FIP, 36"	EA		20
1" (3/4" ID)	EFGC-034-BES-1415-48	3/4" MIP x 3/4" FIP, 48"	EA		20
1" (3/4" ID)	EFGC-034-BES-1415-60	3/4" MIP x 3/4" FIP, 60"	EA		20
1" (3/4" ID)	EFGC-034-BES-1415-72	3/4" MIP x 3/4" FIP, 72"	EA		20



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-034-BES-1515-24	3/4" FIP x 3/4" FIP, 24"	EA		20
1" (3/4" ID)	EFGC-034-BES-1515-36	3/4" FIP x 3/4" FIP, 36"	EA		20
1" (3/4" ID)	EFGC-034-BES-1515-48	3/4" FIP x 3/4" FIP, 48"	EA		20
1" (3/4" ID)	EFGC-034-BES-1515-60	3/4" FIP x 3/4" FIP, 60"	EA		20



Commercial Food Service **Gas Connector Kits**

BJ Kit 1	QD	1 Quick Disconnect	
	EL	2 Elbows	
	RC	1 Restraining Cable	
	V	1 Full Port Valve	
BJ Kit 2	QD	1 Quick Disconnect	
	EL	1 Elbow	
	SW	1 Swivel	
	RC	1 Restraining Cable	
	V	1 Full Port Valve	
BJ Kit 3	QD	1 Quick Disconnect	
	SW	2 Swivels	
	RC	1 Restraining Cable	
	V	1 Full Port Valve	

Commercial Food Service BJ Series Connector | **Kit 1**

- Food Service BJ Gas Connector (1), Quick Disconnect (1), Elbows (2), Restraining Cable (1), Full Port Valve (1)
- Fittings : Zinc-Plated Steel S45C
- Yellow PVC Coating
- 360° Rotational Ends



OD	Part #	Description	U/M	Price	Qty/ Box
5/8" (1/2" ID)	EFGC-FS-012-K1-24	BJ Kit 1, 24"	EA		1
5/8" (1/2" ID)	EFGC-FS-012-K1-36	BJ Kit 1, 36"	EA		1
5/8" (1/2" ID)	EFGC-FS-012-K1-48	BJ Kit 1, 48"	EA		1
5/8" (1/2" ID)	EFGC-FS-012-K1-60	BJ Kit 1, 60"	EA		1

OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-FS-034-K1-24	BJ Kit 1, 24"	EA		1
1" (3/4" ID)	EFGC-FS-034-K1-36	BJ Kit 1, 36"	EA		1
1" (3/4" ID)	EFGC-FS-034-K1-48	BJ Kit 1, 48"	EA		1
1" (3/4" ID)	EFGC-FS-034-K1-60	BJ Kit 1, 60"	EA		1

OD	Part #	Description	U/M	Price	Qty/ Box
1 1/4" (1" ID)	EFGC-FS-100-K1-24	BJ Kit 1, 24"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K1-36	BJ Kit 1, 36"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K1-48	BJ Kit 1, 48"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K1-60	BJ Kit 1, 60"	EA		1

Commercial Food Service **Gas Connector Kits**

Commercial Food Service BJ Series Connector | Kit 2

- Food Service BJ Gas Connector (1), Quick Disconnect (1), Elbow (1), Restraining Cable (1), Swivel (1), Full Port Valve (1)
- Fittings : Zinc-Plated Steel S45C
- Yellow PVC Coating
- 360° Rotational Ends



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-FS-034-K2-24	BJ Kit 2, 24"	EA		1
1" (3/4" ID)	EFGC-FS-034-K2-36	BJ Kit 2, 36"	EA		1
1" (3/4" ID)	EFGC-FS-034-K2-48	BJ Kit 2, 48"	EA		1
1" (3/4" ID)	EFGC-FS-034-K2-60	BJ Kit 2, 60"	EA		1

OD	Part #	Description	U/M	Price	Qty/ Box
1 1/4" (1" ID)	EFGC-FS-100-K2-24	BJ Kit 2, 24"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K2-36	BJ Kit 2, 36"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K2-48	BJ Kit 2, 48"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K2-60	BJ Kit 2, 60"	EA		1



Commercial Food Service BJ Series Connector | Kit 3

- Food Service BJ Gas Connector (1), Quick Disconnect (1), Swivels (2), Restraining Cable (1), Full Port Valve (1)
- Fittings : Zinc-Plated Steel S45C
- Yellow PVC Coating
- 360° Rotational Ends



OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-FS-034-K3-24	BJ Kit 3, 24"	EA		1
1" (3/4" ID)	EFGC-FS-034-K3-36	BJ Kit 3, 36"	EA		1
1" (3/4" ID)	EFGC-FS-034-K3-48	BJ Kit 3, 48"	EA		1
1" (3/4" ID)	EFGC-FS-034-K3-60	BJ Kit 3, 60"	EA		1

OD	Part #	Description	U/M	Price	Qty/ Box
1 1/4" (1" ID)	EFGC-FS-100-K3-24	BJ Kit 3, 24"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K3-36	BJ Kit 3, 36"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K3-48	BJ Kit 3, 48"	EA		1
1 1/4" (1" ID)	EFGC-FS-100-K3-60	BJ Kit 3, 60"	EA		1



Fully customized kits are available.
Contact your local sales rep or Easyflex for more information!

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Commercial Food Service **Gas Connector Kits**

BJC Kit 1	EL	2 Elbows	
	V	1 Full Port Valve	
BES Kit 1	EL	2 Elbows	
	V	1 Full Port Valve	

Countertop Gas Appliance Connector | **Kit 1**

- BJC Gas Connector (1) / EL (2) / V (1)
- Fittings : Zinc-Plated Steel S45C
- Yellow PVC Coating



OD	Part #	Description	U/M	Price	Qty/ Box
3/4" (1/2" ID)	EFGC-CC-012-K1-24	BJC Kit 1, 24"	EA		1
3/4" (1/2" ID)	EFGC-CC-012-K1-36	BJC Kit 1, 36"	EA		1

Stationary Gas Appliance Connector | **Kit 1**

- BES Gas Connector (1) / EL (2) / V (1)
- Fittings : Zinc-Plated Steel S45C
- Black PVC Coating



OD	Part #	Description	U/M	Price	Qty/ Box
3/4" (1/2" ID)	EFGC-CS-012-K1-24	BES Kit 1, 24"	EA		1
3/4" (1/2" ID)	EFGC-CS-012-K1-36	BES Kit 1, 36"	EA		1
3/4" (1/2" ID)	EFGC-CS-012-K1-48	BES Kit 1, 48"	EA		1

OD	Part #	Description	U/M	Price	Qty/ Box
1" (3/4" ID)	EFGC-CS-034-K1-24	BES Kit 1, 24"	EA		1
1" (3/4" ID)	EFGC-CS-034-K1-36	BES Kit 1, 36"	EA		1
1" (3/4" ID)	EFGC-CS-034-K1-48	BES Kit 1, 48"	EA		1
1" (3/4" ID)	EFGC-CS-034-K1-60	BES Kit 1, 60"	EA		1

Commercial Food Service **Gas Connector - Parts**

Full Port **Ball Valve**

- Lever Handle
- Brass

Part #	Description	U/M	Price	Qty/ Box
FV-012	1/2" FIP x 1/2" FIP, Full Port Ball Valve	EA		
FV-034	3/4" FIP x 3/4" FIP, Full Port Ball Valve	EA		
FV-100	1" FIP x 1" FIP, Full Port Ball Valve	EA		



90° **Elbow**

- Black Iron

Part #	Description	U/M	Price	Qty/ Box
EFG-L-012	1/2" FIP, 90° Elbow	EA		
EFG-L-034	3/4" FIP, 90° Elbow	EA		
EFG-L-100	1" FIP, 90° Elbow	EA		



Quick **Disconnect**

- Brass

Part #	Description	U/M	Price	Qty/ Box
FS-QD-012	1/2" Quick Disconnect	EA		
FS-QD-034	3/4" Quick Disconnect	EA		
FS-QD-100	1" Quick Disconnect	EA		



Swivel **Fitting**

- Carbon Steel

Part #	Description	U/M	Price	Qty/ Box
FS-SW-034	3/4" Swivel Fitting	EA		
FS-SW-100	1" Swivel Fitting	EA		



Restraining **Cable**

- Restraining Cable (1), Mounting Parts

Part #	Description	U/M	Price	Qty/ Box
FS-RC-24	Restraining Cable, 24"	EA		
FS-RC-36	Restraining Cable, 36"	EA		
FS-RC-48	Restraining Cable, 48"	EA		
FS-RC-60	Restraining Cable, 60"	EA		



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops



Braided Stainless Steel Water Connectors

Burst-free, lead-free, and hassle-free stainless steel braided water connectors for all plumbing fixture applications.



Braided Stainless Steel Water Connectors

Applications

- Faucets
- Toilets
- Dishwashers
- Refrigerators/Ice Makers
- Washing Machines

Benefits

- Reduced Labor Costs
- Burst-Free
- No Special Tools Required
- Full Range of Connections
- Environmentally Safe

Certifications & Approvals

- cUPC / NSF 61 Compliant for safe drinking water
- NSF 372 Compliant : Lead-Free
- ASME A 112.18.6-2009 / CSA B 125.6-2009
- AB 100 Compliant



Materials

Jacket	Braided Stainless Steel 304
Inner Hose	Reinforced PVC
Fittings	Chrome-Plated Brass

Technical Specifications

Rated Temperature	-40° F to 180° F (-40° C to 82° C)
Maximum Pressure	125 psi (8.6 bar)

Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks


No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Braided Stainless Steel Water Connectors

Easyflex braided water connectors can be used for commercial or residential applications. Easyflex offers a complete line of flexible water connectors that are built to last. Durable lead-free connectors are preferred by professional plumbers.

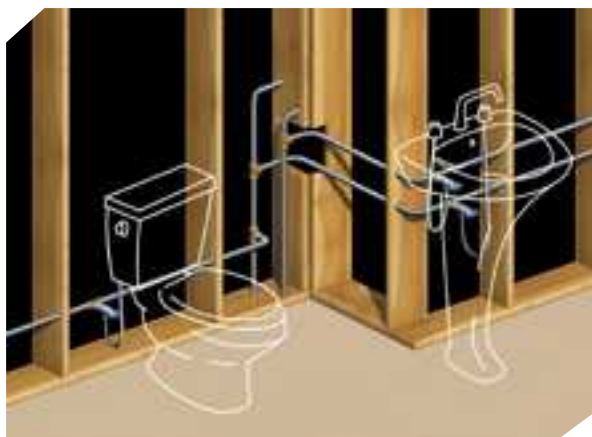

No Special Tools Required!

- Durable, flexible water connector features reinforced PVC inner hose, braided with stainless steel
- Requires no cutting or soldering during installation
- Chrome plated brass hex nuts for corrosion resistance
- Nut-to-hose connection with 12-point pneumatic crimp
- EPDM gasket helps provide a leak-free seal

Parts Numbering System

EF - FC - 38C12F - 12

APPLICATION

FITTINGS

LENGTH

APPLICATION

Part#	Size (ID)
FC	Faucet Connector
TC	Toilet Connector
IC	Ice Maker Connector
WM	Washing Machine Connector
DC	Dishwasher Connector

FITTINGS

Part#	Size (ID)
14C	1/4" Compression
38C	3/8" Compression
12C	1/2" Compression
12F	1/2" FIP
MBC	7/8" Metal Ballcock
BC	7/8" Ballcock
DT	Delta Type
34HB	3/4" Garden Hose Thread
38L	3/8" Elbow
HBL	3/4" Garden Hose Elbow

LENGTH

Standard Lengths

All In Inches Except Ice Maker (FT)

Braided Stainless Steel **Water Connectors**

IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-3816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org



CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is insured with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

Effective Date: October 2013 -Rev. 10/26/2013- Void After: October 2014
 Product: Flexible Metallic Water Connectors File No. K-8333
 Issued To: Easyflex
 1371 Santa Fe Drive
 Tustin, CA 92780

Identification: All connectors shall have the manufacturer's name or trademark on nuts and fittings. An acceptable label shall be placed on tubing showing size, model, manufacturer's name or trademark and the cUPC® certification mark. SPECIAL NOTE ON LABEL: "For use with water in accessible locations only."

Characteristics: Corrugated flexible metallic water connectors can be field fabricated or prefabricated for use in accessible locations with other IAPMO listed fittings. Connectors are manufactured with end fittings and dielectric bushings, or seat or barbed ends to connect water devices to the water supply. To be installed in accordance with the manufacturer's instructions, and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
 Uniform Plumbing Code (UPC®)
 National Plumbing Code of Canada

David McHenry
 Chairman, Product Certification Committee

Russ Chaney
 CEO, The IAPMO Group



This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing.

Connectors
 Gas
 MaxTrap
 Commercial
 Gas
 Connectors
 Braided
 Water
 Connectors
 Supply Stop
 Valves
 Water
 Heater
 Connectors
 Thermostatic
 Mixing
 Valves
 Isolation
 Valves
 Thermal
 Expansion
 Tanks
 No Hub
 Couplings
 Flexible
 Couplings
 Flexible
 Sprinkler
 Drops

Braided Stainless Steel *Water* Connectors

FAUCET Connector 1/2" FIP x 1/2" FIP



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-FC-12F12F-12	SS Braided Faucet Connector, 1/2"FIP x 1/2"FIP, 12"	EA		50
EF-FC-12F12F-16	SS Braided Faucet Connector, 1/2"FIP x 1/2"FIP, 16"	EA		50
EF-FC-12F12F-20	SS Braided Faucet Connector, 1/2"FIP x 1/2"FIP, 20"	EA		50
EF-FC-12F12F-24	SS Braided Faucet Connector, 1/2"FIP x 1/2"FIP, 24"	EA		50
EF-FC-12F12F-30	SS Braided Faucet Connector, 1/2"FIP x 1/2"FIP, 30"	EA		50

FAUCET Connector 1/2" Compression x 1/2" FIP



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-FC-12C12F-12	SS Braided Faucet Connector, 1/2"C x 1/2"FIP, 12"	EA		50
EF-FC-12C12F-16	SS Braided Faucet Connector, 1/2"C x 1/2"FIP, 16"	EA		50
EF-FC-12C12F-20	SS Braided Faucet Connector, 1/2"C x 1/2"FIP, 20"	EA		50

FAUCET Connector 3/8" Compression x 3/8" Compression



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-FC-38C38C-9	SS Braided Faucet Connector, 3/8"C x 3/8"C, 9"	EA		50
EF-FC-38C38C-12	SS Braided Faucet Connector, 3/8"C x 3/8"C, 12"	EA		50
EF-FC-38C38C-16	SS Braided Faucet Connector, 3/8"C x 3/8"C, 16"	EA		50
EF-FC-38C38C-20	SS Braided Faucet Connector, 3/8"C x 3/8"C, 20"	EA		50
EF-FC-38C38C-24	SS Braided Faucet Connector, 3/8"C x 3/8"C, 24"	EA		50
EF-FC-38C38C-30	SS Braided Faucet Connector, 3/8"C x 3/8"C, 30"	EA		50

FAUCET Connector 3/8" Compression x Delta Type



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-FC-38DT-12	SS Braided Faucet Connector, 3/8"C x Delta Type, 12"	EA		50
EF-FC-38DT-16	SS Braided Faucet Connector, 3/8"C x Delta Type, 16"	EA		50
EF-FC-38DT-20	SS Braided Faucet Connector, 3/8"C x Delta Type, 20"	EA		50

Braided Stainless Steel Water Connectors

FAUCET Connector

3/8" Compression x 1/2" FIP

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-FC-38C12F-9	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 9"	EA		50
EF-FC-38C12F-12	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 12"	EA		50
EF-FC-38C12F-16	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 16"	EA		50
EF-FC-38C12F-20	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 20"	EA		50
EF-FC-38C12F-24	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 24"	EA		50
EF-FC-38C12F-30	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 30"	EA		50
EF-FC-38C12F-36	SS Braided Faucet Connector, 3/8"C x 1/2"FIP, 36"	EA		50



ICE MAKER Connector

1/4" Compression x 1/4" Compression

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-IC-14C14C-5	SS Braided Ice Maker Connector, 1/4"C x 1/4" C, 5 ft	EA		50
EF-IC-14C14C-6	SS Braided Ice Maker Connector, 1/4"C x 1/4" C, 6 ft	EA		50
EF-IC-14C14C-10	SS Braided Ice Maker Connector, 1/4"C x 1/4" C, 10 ft	EA		25



WASHING MACHINE Connector

3/4" Hose Bibb (FHT)

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-WM-34HB-48	SS Braided Washing Machine Connector, 3/4"HB, 48"	EA		25
EF-WM-34HB-60	SS Braided Washing Machine Connector, 3/4"HB, 60"	EA		25
EF-WM-34HB-72	SS Braided Washing Machine Connector, 3/4"HB, 72"	EA		25



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Braided Stainless Steel *Water Connectors*

TOILET Connector 3/8" Compression x 7/8" Ballcock



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-TC-38CBC-9	SS Braided Toilet Connector, 3/8"C x 7/8"BC, 9"	EA		50
EF-TC-38CBC-12	SS Braided Toilet Connector, 3/8"C x 7/8"BC, 12"	EA		50
EF-TC-38CBC-16	SS Braided Toilet Connector, 3/8"C x 7/8"BC, 16"	EA		50
EF-TC-38CBC-20	SS Braided Toilet Connector, 3/8"C x 7/8"BC, 20"	EA		50

TOILET Connector 3/8" Compression x 7/8" Metal Ballcock



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-TC-38CMBC-9	SS Braided Toilet Connector, 3/8"C x 7/8" Metal BC, 9"	EA		50
EF-TC-38CMBC-12	SS Braided Toilet Connector, 3/8"C x 7/8" Metal BC, 12"	EA		50
EF-TC-38CMBC-16	SS Braided Toilet Connector, 3/8"C x 7/8" Metal BC, 16"	EA		50
EF-TC-38CMBC-20	SS Braided Toilet Connector, 3/8"C x 7/8" Metal BC, 20"	EA		50

TOILET Connector 1/2" FIP x 7/8" Ballcock



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-TC-12FBC-12	SS Braided Toilet Connector, 1/2"FIP x 7/8"BC, 12"	EA		50
EF-TC-12FBC-16	SS Braided Toilet Connector, 1/2"FIP x 7/8"BC, 16"	EA		50
EF-TC-12FBC-20	SS Braided Toilet Connector, 1/2"FIP x 7/8"BC, 20"	EA		50

Braided Stainless Steel Water Connectors

DISHWASHER Connector

3/8" Compression x 3/8" Compression

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-DC-38C38C-48	SS Braided Dishwasher Connector, 3/8"C x 3/8"C, 48"	EA		50
EF-DC-38C38C-60	SS Braided Dishwasher Connector, 3/8"C x 3/8"C, 60"	EA		50
EF-DC-38C38C-72	SS Braided Dishwasher Connector, 3/8"C x 3/8"C, 72"	EA		50



DISHWASHER Connector

3/8" Compression x 3/8" Elbow

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-DC-38C38L-48	SS Braided Dishwasher Connector, 3/8"C x 3/8"EL, 48"	EA		50
EF-DC-38C38L-60	SS Braided Dishwasher Connector, 3/8"C x 3/8"EL, 60"	EA		50
EF-DC-38C38L-72	SS Braided Dishwasher Connector, 3/8"C x 3/8"EL, 72"	EA		50
EF-DC-38C38L-96	SS Braided Dishwasher Connector, 3/8"C x 3/8"EL, 96"	EA		50



DISHWASHER Connector

1/2" Compression x 3/8" Elbow

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-DC-12C38L-60	SS Braided Dishwasher Connector, 1/2"C x 3/8"EL, 60"	EA		50



DISHWASHER Connector

3/8" Compression x 3/4" Hose Bibb (FHT) Elbow

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



Part #	Description	U/M	Price	Qty/ Box
EF-DC-38CHBL-48	SS Braided Dishwasher Connector, 3/8"C x 3/4" GH Elbow, 48"	EA		50
EF-DC-38CHBL-60	SS Braided Dishwasher Connector, 3/8"C x 3/4" GH Elbow, 60"	EA		50
EF-DC-38CHBL-72	SS Braided Dishwasher Connector, 3/8"C x 3/4" GH Elbow, 72"	EA		50



DISHWASHER Connector Kit

3/8" Compression x 3/8" Compression

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- 4 Extra Fittings Included



Part #	Description	U/M	Price	Qty/ Box
DC-KIT-48	SS Braided DC 3/8"Cx3/8"C + 3/8"C, 1/2"C, 3/8"EL, 3/4"HB Adapters, 48"L	EA		50
DC-KIT-60	SS Braided DC 3/8"Cx3/8"C + 3/8"C, 1/2"C, 3/8"EL, 3/4"HB Adapters, 60"L	EA		50
DC-KIT-72	SS Braided DC 3/8"Cx3/8"C + 3/8"C, 1/2"C, 3/8"EL, 3/4"HB Adapters, 72"L	EA		50



Gas Connectors

Max Trap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops




Lead -free

NEW Braided Stainless Steel Safe-flow Water Connector

Prevents unexpected water damage from a hose burst or excessive flow of water.

The Easyflex Safe-Flow EFV is our new supply line with a built-in excess flow valve that can be installed between the supply stop valve and the fixture. This unique valve automatically activates to prevent water damage caused by breakage, bursts or excessive water flow.

- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm
- UPC / NSF 61 Compliant
- NSF 372 Compliant : Lead-Free
- ASME A 112.18.6-2009 / CSA B 125.6-2009

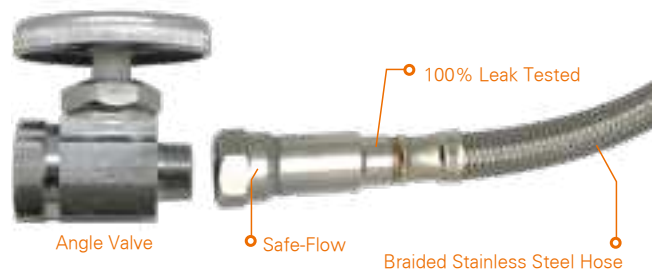

Resetting Safe-Flow

To reset the Safe-Flow EFV, first, make sure the supply line is not damaged, then simply open the water supply stop valve.

Available Applications

Faucets / Toilets / Dishwashers / Washing Machines / Refrigerators/Ice Makers

Braided Stainless Steel **Safe-flow** Water Connectors

Safe-flow



TEST REPORT

5001 East Philadelphia Street
Ontario, California - USA 91761-2816
Ph: 909.472.4100 | Fax: 909.472.4243
<http://www.iapmo.org>

Report Number: 885-13015
Report Issued: October 31, 2013
Client: Kofulso
377-8 Gam Gok-Dong Seo-Gu
Incheon City, South Korea 404-330
Project No.: 22347
Contact: Hun Kim
Source of Samples: The samples were shipped to IAPMO R&T Lab from Kofulso, and received in good condition on September 19, 2013.
Date of Testing: October 17, 2013 to October 30, 2013.
Sample Description: Flexible hoses with excess shut-off, refer to pages 2-3 for model numbers and descriptions.
Scope of Testing: The purpose of the testing was to determine whether the sample tested of the Flexible hoses with excess shut-off met the applicable requirements of CSA B125-5/Z600-2011, entitled, "Flexible water connectors with excess flow shut-off devices".
Conclusion: The samples, tested of the Flexible hoses with excess shut-off, models listed on pages 2-3, from Kofulso, COMPLIED with the applicable requirements of CSA B125-5/Z600-2011.
Pending: NSF61.

By our signatures below, we certify that all the testing and sample preparation for this report was performed under continuous, direct supervision of IAPMO R&T Lab, unless stated otherwise.

Tested By,

Reviewed by,

Vinh Nguyen, Test Technician

Sean Vu, P.E. Manager, Specialty Projects

This report may not be copied, except in its entirety, without the written permission of IAPMO R&T Lab

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Braided Stainless Steel **Safe-flow** Water Connectors



FAUCET Connector 1/2" FIP x 1/2" FIP

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Price	Qty/ Box
EF-FC-12F12F-12V	1/2" FIP x 1/2" FIP, Excess Flow Shut-off Valve, 12"	EA		50
EF-FC-12F12F-16V	1/2" FIP x 1/2" FIP, Excess Flow Shut-off Valve, 16"	EA		50
EF-FC-12F12F-20V	1/2" FIP x 1/2" FIP, Excess Flow Shut-off Valve, 20"	EA		50



FAUCET Connector 1/2" Compression x 1/2" FIP

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Price	Qty/ Box
EF-FC-12C12F-12V	1/2"C x 1/2" FIP, Excess Flow Shut-off Valve, 12"	EA		50
EF-FC-12C12F-16V	1/2"C x 1/2" FIP, Excess Flow Shut-off Valve, 16"	EA		50
EF-FC-12C12F-20V	1/2"C x 1/2" FIP, Excess Flow Shut-off Valve, 20"	EA		50



FAUCET Connector 3/8" Compression x 3/8" Compression

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Price	Qty/ Box
EF-FC-38C38C-12V	3/8"C x 3/8"C, Excess Flow Shut-off Valve, 12"	EA		50
EF-FC-38C38C-16V	3/8"C x 3/8"C, Excess Flow Shut-off Valve, 16"	EA		50
EF-FC-38C38C-20V	3/8"C x 3/8"C, Excess Flow Shut-off Valve, 20"	EA		50
EF-FC-38C38C-24V	3/8"C x 3/8"C, Excess Flow Shut-off Valve, 24"	EA		50
EF-FC-38C38C-30V	3/8"C x 3/8"C, Excess Flow Shut-off Valve, 30"	EA		50



FAUCET Connector 3/8" Compression x Delta Type

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Price	Qty/ Box
EF-FC-38DT-12V	3/8"C x Delta Type, Excess Flow Shut-off Valve, 12"	EA		50
EF-FC-38DT-16V	3/8"C x Delta Type, Excess Flow Shut-off Valve, 16"	EA		50
EF-FC-38DT-20V	3/8"C x Delta Type, Excess Flow Shut-off Valve, 20"	EA		50

Braided Stainless Steel **Safe-flow** Water Connectors

Safe-flow

FAUCET Connector 3/8" Compression x 1/2" FIP

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-FC-38C12F-9V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 9"	EA	50
EF-FC-38C12F-12V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 12"	EA	50
EF-FC-38C12F-16V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 16"	EA	50
EF-FC-38C12F-20V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 20"	EA	50
EF-FC-38C12F-24V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 24"	EA	50
EF-FC-38C12F-30V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 30"	EA	50
EF-FC-38C12F-36V	3/8"C x 1/2"FIP, Excess Flow Shut-off Valve, 36"	EA	50



ICE MAKER Connector 1/4" Compression x 1/4" Compression

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-IC-14C14C-5V	1/4"C x 1/4" C, Excess Flow Shut-off Valve, 5 ft	EA	50
EF-IC-14C14C-6V	1/4"C x 1/4" C, Excess Flow Shut-off Valve, 6 ft	EA	50
EF-IC-14C14C-10V	1/4"C x 1/4" C, Excess Flow Shut-off Valve, 10 ft	EA	25



WASHING MACHINE Connector 3/4" Hose Bibb (FHT)

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-WM-34HB-48V	3/4"HB, Excess Flow Shut-off Valve, 48"	EA	25
EF-WM-34HB-60V	3/4"HB, Excess Flow Shut-off Valve, 60"	EA	25
EF-WM-34HB-72V	3/4"HB, Excess Flow Shut-off Valve, 72"	EA	25



Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Braided Stainless Steel **Safe-flow** Water Connectors



TOILET Connector 3/8" Compression x 7/8" Ballcock



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-TC-38CBC-9V	3/8"C x 7/8"BC, Excess Flow Shut-off Valve, 9"	EA	50
EF-TC-38CBC-12V	3/8"C x 7/8"BC, Excess Flow Shut-off Valve, 12"	EA	50
EF-TC-38CBC-16V	3/8"C x 7/8"BC, Excess Flow Shut-off Valve, 16"	EA	50
EF-TC-38CBC-20V	3/8"C x 7/8"BC, Excess Flow Shut-off Valve, 20"	EA	50

TOILET Connector 3/8" Compression x 7/8" Metal Ballcock



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-TC-38CMBC-12V	3/8"C x 7/8" Metal BC, Excess Flow Shut-off Valve, 12"	EA	50
EF-TC-38CMBC-16V	3/8"C x 7/8" Metal BC, Excess Flow Shut-off Valve, 16"	EA	50
EF-TC-38CMBC-20V	3/8"C x 7/8" Metal BC, Excess Flow Shut-off Valve, 20"	EA	50

TOILET Connector 1/2" FIP x 7/8" Ballcock



- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-TC-12FBC-12V	1/2"FIP x 7/8"BC, Excess Flow Shut-off Valve, 12"	EA	50
EF-TC-12FBC-16V	1/2"FIP x 7/8"BC, Excess Flow Shut-off Valve, 16"	EA	50
EF-TC-12FBC-20V	1/2"FIP x 7/8"BC, Excess Flow Shut-off Valve, 20"	EA	50

Braided Stainless Steel **Safe-flow** Water Connectors

Safeflow

DISHWASHER Connector 3/8" Compression x 3/8" Elbow

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-DC-38C38L-48V	3/8"C x 3/8"EL, Excess Flow Shut-off Valve, 48"	EA	50
EF-DC-38C38L-60V	3/8"C x 3/8"EL, Excess Flow Shut-off Valve, 60"	EA	50
EF-DC-38C38L-72V	3/8"C x 3/8"EL, Excess Flow Shut-off Valve, 72"	EA	50
EF-DC-38C38L-96V	3/8"C x 3/8"EL, Excess Flow Shut-off Valve, 96"	EA	50



DISHWASHER Connector 1/2" Compression x 3/8" Elbow

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-DC-12C38L-60V	1/2"C x 3/8"EL, Excess Flow Shut-off Valve, 60"	EA	50



DISHWASHER Connector 3/8" Compression x 3/4" Hose Bibb (FHT) Elbow

- Tube-PVC
- Jacket-Braided Stainless Steel 304
- Excess Flow Shut-off Valve
- Nut-Chrome Plated Brass
- Max. Working Temperature 180°F (82°C)
- Max. Working Pressure 125 psi (8.6bar)
- Minimum Flow: 2.0 gpm
- Shut-off Flow: 2.5 - 3.5 gpm



Part #	Description	U/M	Qty/ Box
EF-DC-38CHBL-48V	3/8"C x 3/4" GH Elbow, Excess Flow Shut-off Valve, 48"	EA	50
EF-DC-38CHBL-60V	3/8"C x 3/4" GH Elbow, Excess Flow Shut-off Valve, 60"	EA	50
EF-DC-38CHBL-72V	3/8"C x 3/4" GH Elbow, Excess Flow Shut-off Valve, 72"	EA	50



Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops



*Lead Free / Quarter Turn
Supply Stop Valves*

Lead Free / Quarter Turn Supply Stop Valve

Features & Benefits

- Forged lead free brass body
- Chrome plated
- Pressure rating : 125 psi / 180°F
- Precision machined brass ball valve is specifically engineered and manufactured with PTFE seats to provide smooth operation without freeze-ups, even after long periods of non-use.
- Two high-performance o-rings withstand high temperatures and corrosion from harsh water environments.
- 100% leak tested

Connection Types

- Compression
- CPVC
- FIP
- Sweat
- Crimp PEX (F1807)
- Cold Expansion PEX (F1960)

1/4 - Turn Ball Valve

The 1/4-turn ball valve and stem are made of brass and built for longevity and smooth operation. Sweat, compression, or crimp fittings provide a quick and reliable connection option.

Certifications & Approvals

- NSF/ANSI 61 Lead Free
- cUPC Approved
- ASME A112.18.1 / CSA B125.1
- AB 100 Compliant



Specifications

Name	Material	Qty.
Compression Nut	Brass	1
Sleeve	Copper	1
Body	Lead Free Brass	1
Stem	Brass	1
O-ring	NBR	2
Handle	Zinc	1
Screw	Steel	1
Ball seat	PTFE	2
Ball	Lead Free Brass	1
Adapter	Lead Free Brass	1



Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Supply Stop Valve

Compression × Compression - Angle

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-58C14C	5/8" OD × 1/4" OD Comp	EA		
EFSV-AG-58C38C	5/8" OD × 3/8" OD Comp	EA		
EFSV-AG-58C12C	5/8" OD × 1/2" OD Comp	EA		



Compression × Compression - Straight

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-ST-38C38C	3/8" OD × 3/8" OD Comp	EA		
EFSV-ST-58C38C	5/8" OD × 3/8" OD Comp	EA		



FIP × Compression - Angle

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-38FT38C	3/8" FIP × 3/8" OD Comp	EA		
EFSV-AG-12FT14C	1/2" FIP × 1/4" OD Comp	EA		
EFSV-AG-12FT38C	1/2" FIP × 3/8" OD Comp	EA		
EFSV-AG-12FT12C	1/2" FIP × 1/2" OD Comp	EA		



FIP × Compression - Straight

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-ST-38FT38C	3/8" FIP × 3/8" OD Comp	EA		
EFSV-ST-12FT38C	1/2" FIP × 3/8" OD Comp	EA		



Supply Stop Valve

FIP x Compression x Compression - (Dual Outlet)

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-DU-58C38C-14C	5/8" OD x 3/8" OD Comp x 1/4" OD Comp	EA		
EFSV-DU-58C38C-38C	5/8" OD x 3/8" OD Comp x 3/8" OD Comp	EA		



FIP x Compression x Compression - (Dual Double Handle)

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-DH-58C38C-38C	5/8" OD x 3/8" OD Comp x 3/8" OD Comp	EA		



Sweat x Compression - Angle

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-12SW38C	1/2" NOM SWEAT x 3/8" OD Comp	EA		



Sweat x Compression - Straight

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-ST-12SW14C	1/2" NOM SWEAT x 1/4" OD Comp	EA		
EFSV-ST-12SW38C	1/2" NOM SWEAT x 3/8" OD Comp	EA		



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Supply Stop Valve

Loose Key Compression × Compression - Angle

- Lead Free Brass Body
- Lead Free Zinc Handle
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-58C38CK	5/8" OD × 3/8" OD Comp	EA		



Crimp PEX (F1807) Barb × Compression - Angle

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-12PX38C	1/2" NOM BARB × 3/8" OD Comp	EA		



Crimp PEX (F1807) Barb × Compression - Straight

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-ST-12PX38C	1/2" NOM BARB × 3/8" OD Comp	EA		



Sweat × Compression w/Bell Escutcheon - Angle

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Qty/Box
EFSV-AE-12SW38C	1/2" NOM SWEAT w/5" Extension × 3/8" OD Comp	EA	



Sweat × Compression w/Bell Escutcheon - Straight

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Qty/Box
EFSV-SE-12SW38C	1/2" NOM SWEAT w/5" Extension × 3/8" OD Comp	EA	



Supply Stop Valve

Cold Expansion PEX (F1960) Barb x Compression - **Angle**

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-12CX38C	1/2" NOM BARB x 3/8" OD COMP	EA		



Cold Expansion PEX (F1960) Barb x Compression - **Straight**

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-ST-12CX38C	1/2" NOM BARB x 3/8" OD COMP	EA		



CPVC Solvent Weld x Compression - **Angle**

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-AG-12CP38C	1/2" NOM CPVC x 3/8" OD Comp	EA		



CPVC Solvent Weld x Compression - **Straight**

- Lead Free Brass Body
- Pressure Rating : 125 psi / 180 °F
- Finish : Chrome

Part #	Description	U/M	Price	Qty/Box
EFSV-ST-12CP38C	1/2" NOM CPVC x 3/8" OD Comp	EA		



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops



Flexible Water Heater Connectors

High resistance to corrosion, maximum flexibility without kinking, and maintains optimal water flow.



Flexible Stainless Steel Water Heater Connectors

Applications

- Boilers
- Water Softeners
- Water Heaters
- Tankless Water Heaters

Benefits

- 100% Leak Tested
- Reduced Labor Costs
- Corrosion & Scaling Resistant
- No Special Tools Required
- Minimal Use of Fittings
- Environmentally Safe

Certifications and Approvals

- IAPMO/ cUPC Certified
- ASME A112.18.6-2009/ CSA B125.6-2009
- NSF 61 Compliant
- NSF 372 Compliant : Lead-Free
- AB 100 Compliant



Product Specifications

Tubing	Stainless Steel 304 (ASTM A 240)				
Tubing Thickness	0.01" and 0.012"				
Fittings	Chrome-Plated Brass 3771				
Gasket	High-Quality EPDM				
Lengths Available	12", 15", 18", 24", 36", 48"				
Sizes Available (ID)	3/4"	1"	1-1/4"	1-1/2"	2"
Thread Standard	ASME B1.20.1				

Technical Specifications

Working Pressure	Up to 125 psig
Intermittent Impulse Pressure	Up to 180 psig
Temperature Rating	-40° F to 180° F (-40° C to 82° C)
Min. Bend Radius	2.5" (Recommended)

Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

Flexible Stainless Steel Water Heater Connectors

Strength and Flexibility

Easyflex water connectors are made from durable and corrosion resistant 304 stainless steel. The annular corrugations allow maximum flexibility while maintaining the durability and strength of stainless steel. Easyflex water connectors can be tightly bent and still maintain the inner diameter without any kinks.

Variety

Easyflex offers sizes from 3/4" to 2" with a variety of connections - threaded, sweat, and push-fit to meet all your needs.



FIP



MIP



Push-Fit



PEX



Cold Expansion



Braided
Stainless Steel



Sweat



Copper

Parts Numbering System

EFWC - 034 - SS - 1010 - 12

TUBE ID

FITTINGS

TUBE TYPE

LENGTH

TUBE ID

Part#	Size (ID)
034	3/4"
034C	3/4"
100	1"
114	1-1/4"
112	1-1/2"
200	2"

TUBE TYPE

Part#	
SS	Stainless Steel
BR	Braided (Stainless Steel)
034C	Copper

FITTINGS

Part#	Size (ID)
10	3/4" FIP
11	3/4" MIP
12	1" FIP
13	1-1/4" FIP
14	1-1/2" FIP
15	2" FIP
50	3/4" Push-Fit
60	3/4" Sweat
70	3/4" PEX (F1807)
80	3/4" Cold Expansion PEX (F1960)

LENGTH

Standard Lengths


12", 15", 18", 24", 36", 48"

Flexible Stainless Steel Water Heater Connectors


FIP/ MIP Fitting | 3/4" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771


- Gasket-High Quality EPDM
- External Dielectric Sleeve

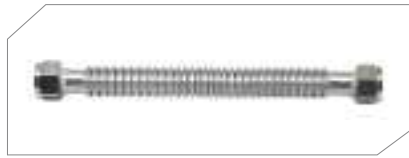

ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1010-12	3/4" FIP x 3/4" FIP, 12"	EA		25
3/4"	EFWC-034-SS-1010-15	3/4" FIP x 3/4" FIP, 15"	EA		25
3/4"	EFWC-034-SS-1010-18	3/4" FIP x 3/4" FIP, 18"	EA		25
3/4"	EFWC-034-SS-1010-24	3/4" FIP x 3/4" FIP, 24"	EA		25
3/4"	EFWC-034-SS-1010-36	3/4" FIP x 3/4" FIP, 36"	EA		25
3/4"	EFWC-034-SS-1010-48	3/4" FIP x 3/4" FIP, 48"	EA		25

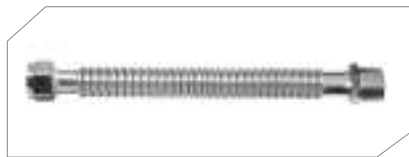

ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1011-15	3/4" FIP x 3/4" MIP, 15"	EA		25
3/4"	EFWC-034-SS-1011-18	3/4" FIP x 3/4" MIP, 18"	EA		25
3/4"	EFWC-034-SS-1011-24	3/4" FIP x 3/4" MIP, 24"	EA		25

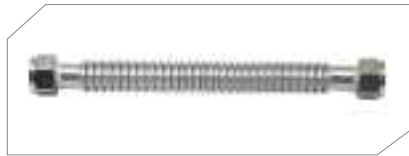

ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1012-18	3/4" FIP x 1" FIP, 18"	EA		25
3/4"	EFWC-034-SS-1012-24	3/4" FIP x 1" FIP, 24"	EA		25

BRAIDED / FIP Fitting | 3/4" ID

- Tube-Reinforced PVC
- Jacket-Braided Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Max. Working Temperature 180 °F (82°C)
- Max. Working Pressure 125 psi (8.6bar)



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-BR-1010-18	3/4" FIP x FIP 3/4", 18"	EA		25
3/4"	EFWC-034-BR-1010-24	3/4" FIP x FIP 3/4", 24"	EA		25



Flexible Stainless Steel Water Heater Connectors

FIP Fitting | 1" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
1"	EFWC-100-SS-1212-12	1" FIP x 1" FIP, 12"	EA		12
1"	EFWC-100-SS-1212-18	1" FIP x 1" FIP, 18"	EA		12
1"	EFWC-100-SS-1212-24	1" FIP x 1" FIP, 24"	EA		12



ID	Part #	Description	U/M	Price	Qty/ Box
1"	EFWC-100-SS-1213-12	1" FIP x 1-1/4" FIP, 12"	EA		12
1"	EFWC-100-SS-1213-15	1" FIP x 1-1/4" FIP, 15"	EA		12
1"	EFWC-100-SS-1213-18	1" FIP x 1-1/4" FIP, 18"	EA		12
1"	EFWC-100-SS-1213-24	1" FIP x 1-1/4" FIP, 24"	EA		12



FIP Fitting | 1-1/4" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
1-1/4"	EFWC-114-SS-1313-18	1-1/4" FIP x 1-1/4" FIP, 18"	EA		12
1-1/4"	EFWC-114-SS-1313-24	1-1/4" FIP x 1-1/4" FIP, 24"	EA		12



FIP Fitting | 1-1/2" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
1-1/2"	EFWC-112-SS-1414-18	1-1/2" FIP x 1-1/2" FIP, 18"	EA		12
1-1/2"	EFWC-112-SS-1414-24	1-1/2" FIP x 1-1/2" FIP, 24"	EA		12



FIP Fitting | 2" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
2"	EFWC-200-SS-1515-18	2" FIP x 2" FIP, 18"	EA		9
2"	EFWC-200-SS-1515-24	2" FIP x 2" FIP, 24"	EA		9




Flexible Stainless Steel Water Heater Connectors

PUSH-FIT Fitting | 3/4" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1050-15	3/4" FIP x 3/4" Push-Fit, 15"	EA		25
3/4"	EFWC-034-SS-1050-18	3/4" FIP x 3/4" Push-Fit, 18"	EA		25
3/4"	EFWC-034-SS-1050-24	3/4" FIP x 3/4" Push-Fit, 24"	EA		25




SWEAT Fitting | 3/4" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1060-18	3/4" FIP x 3/4" Sweat, 18"	EA		25
3/4"	EFWC-034-SS-1060-24	3/4" FIP x 3/4" Sweat, 24"	EA		25



PEX B Crimp (F1807) Fitting | 3/4" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1070-18	3/4" FIP x 3/4" PEX B Crimp, 18"	EA		25
3/4"	EFWC-034-SS-1070-24	3/4" FIP x 3/4" PEX B Crimp, 24"	EA		25




PEX A Cold Expansion (F1960) Fitting | 3/4" ID

- Tube-Stainless Steel 304 (ASTM A 240)
- Nut-Chrome-Plated Brass 3771
- Gasket-High Quality EPDM



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034-SS-1080-18	3/4" FIP x 3/4" PEX A Cold Expansion, 18"	EA		25
3/4"	EFWC-034-SS-1080-24	3/4" FIP x 3/4" PEX A Cold Expansion, 24"	EA		25



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves


Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

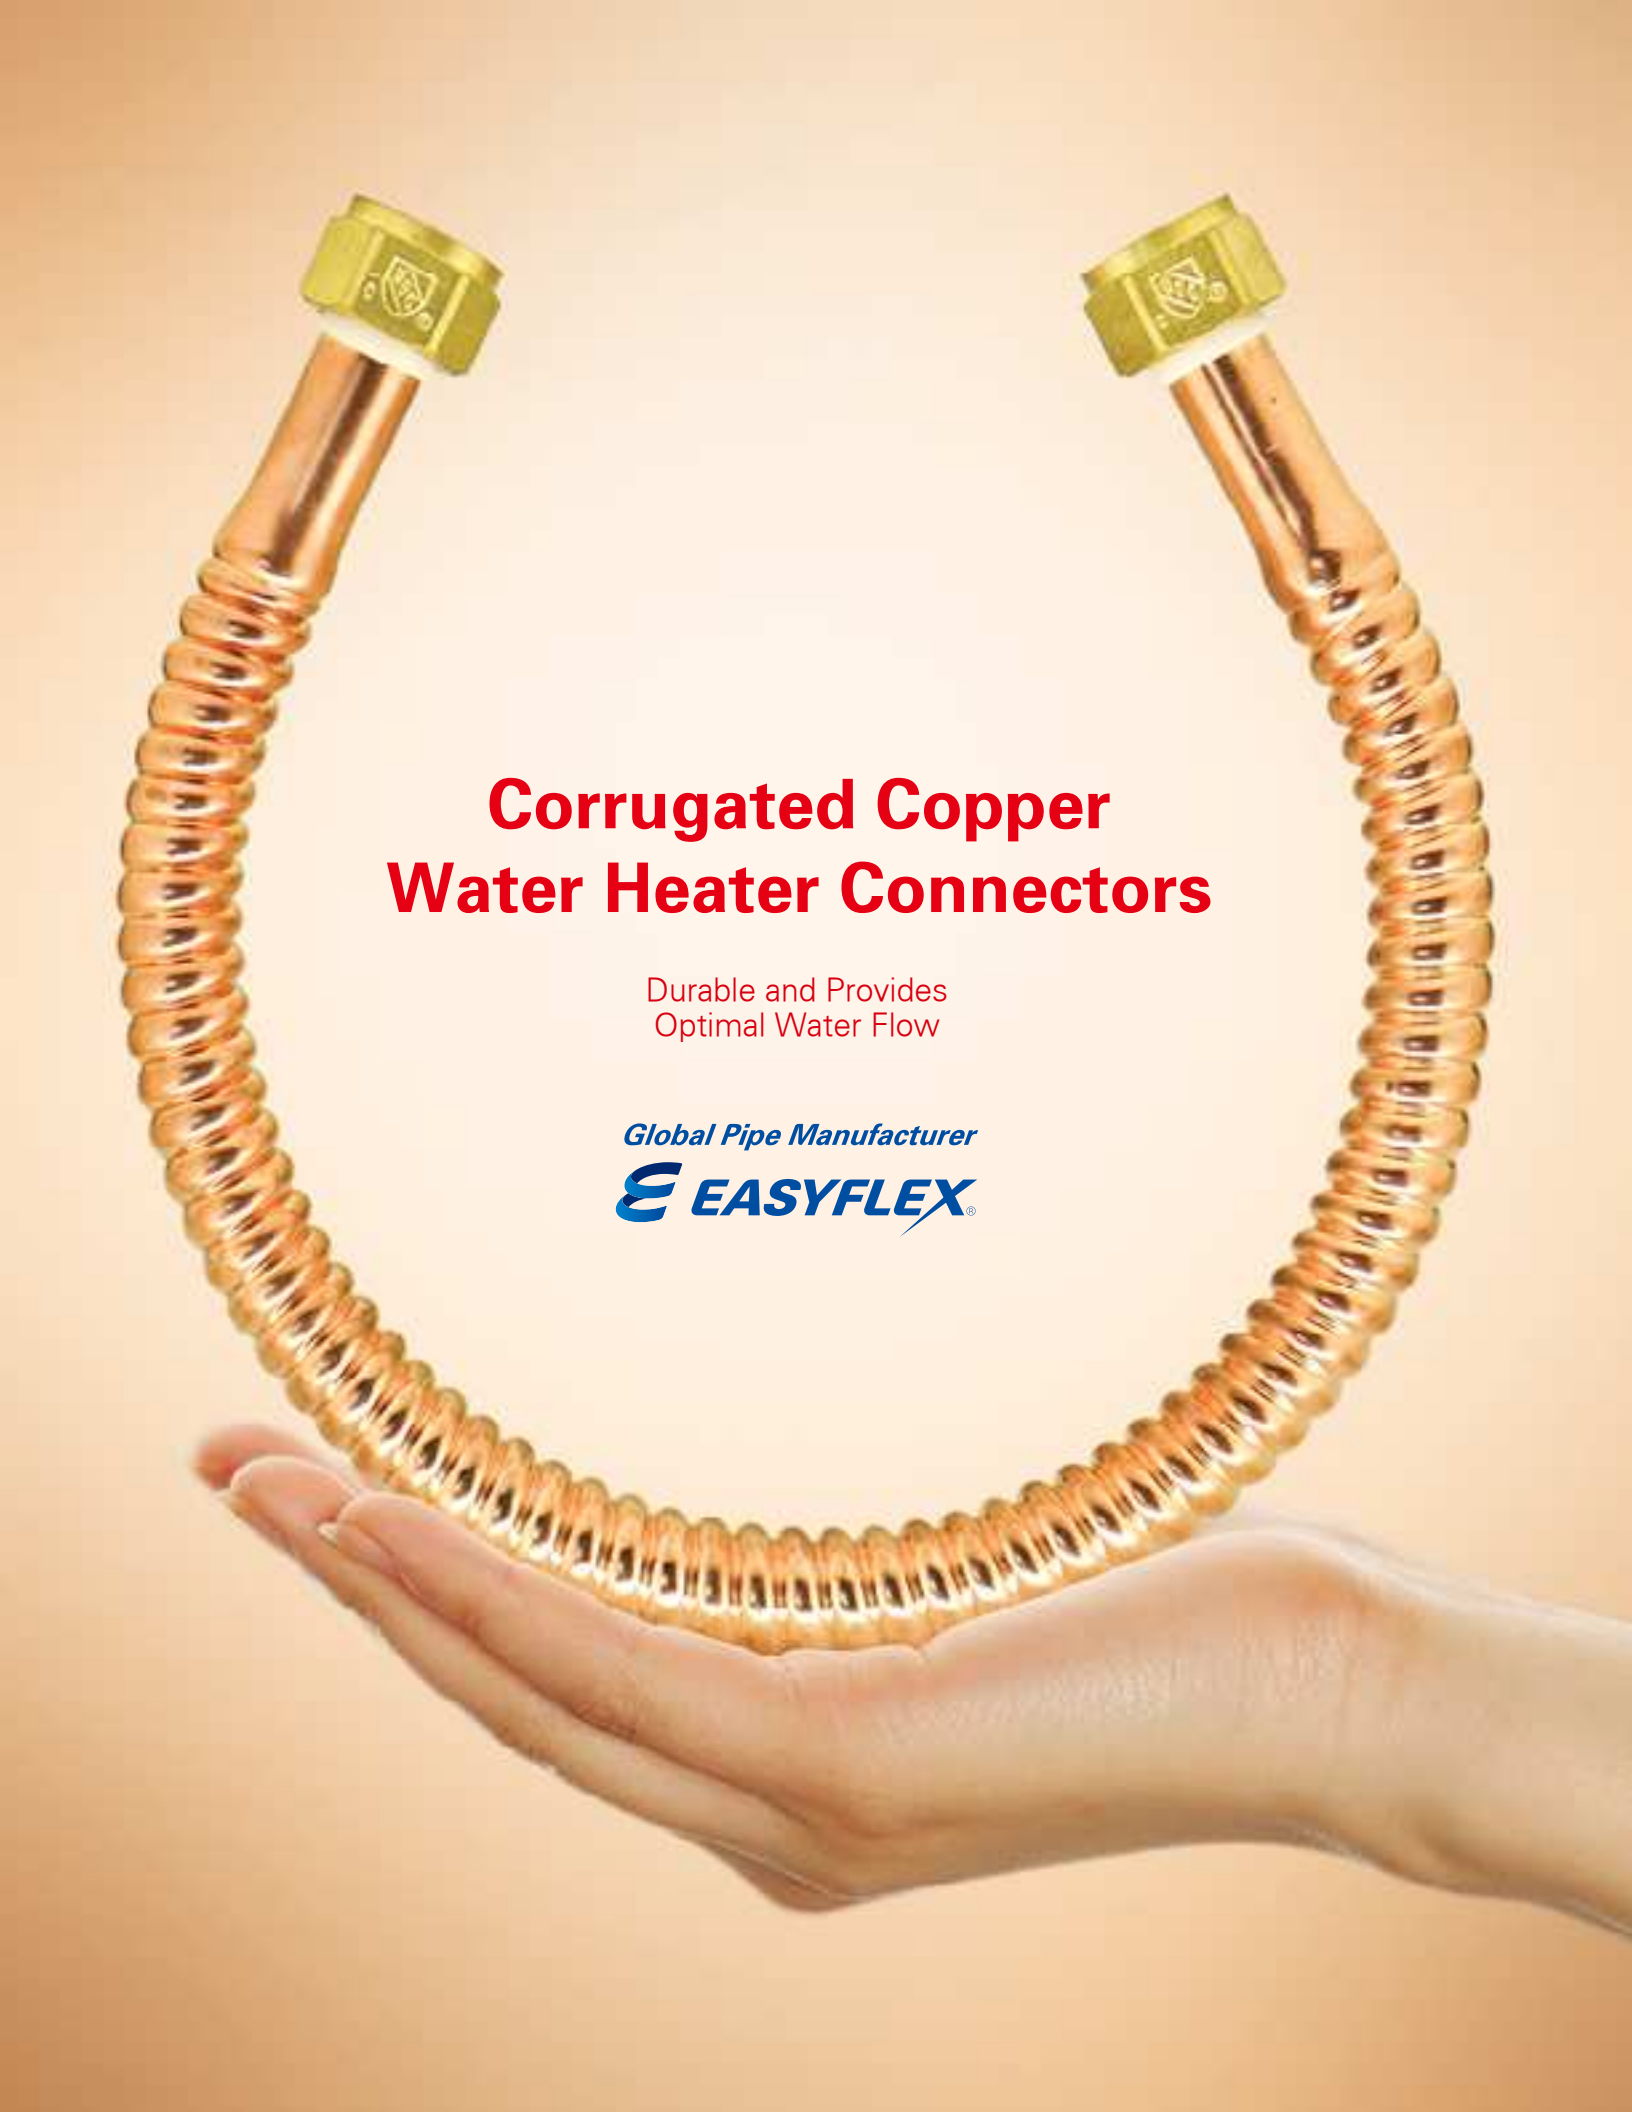A hand is shown from the bottom, holding a U-shaped corrugated copper water heater connector. The connector has two brass fittings at the top, each with a logo. The background is a solid light orange color.

Corrugated Copper Water Heater Connectors

Durable and Provides
Optimal Water Flow

Global Pipe Manufacturer

E EASYFLEX®

Corrugated Copper *Water Heater Connectors*



Applications

- Boilers
- Water Heaters
- Tankless Water Heaters

Benefits

- 100% Leak Tested
- Reduced Labor Costs
- Corrosion & Scaling Resistant
- No Special Tools Required
- Minimal Use of Fittings
- Environmentally-Safe

Certifications & Approvals

- IAPMO/ UPC Certified
- ASME A 112.18.6-2009 / CSA B 125.6-2009
- NSF 61 Compliant
- NSF 372 Compliant : Lead-Free



Materials

Tubing	Copper
Fittings	Brass 3771
Gasket	High-Quality EPDM

Size

Lengths	12", 15", 18", 24"
Size	3/4" ID

Technical Specifications

Operating Pressure	Up to 125 psig
Intermittent Impulse Pressure	Up to 180 psig
Temperature	-40° F to 180° F (-40° C to 82° C)
Minimum Bend Radius	8" (Recommended)

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Corrugated Copper **Water Heater Connectors**

IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2818 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org



CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

Effective Date: December 2013

Valid After: December 2014

Product: Lead Free Plumbing Products

File No. 6634

Issued To: Kofulso Co., Ltd.
377-8, Gum Gok-dong, Seo-gu
Incheon City 404-330,
Korea

Identification: Each product shall bear permanent and legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product and/or product packaging may also bear the term "Lead Plumbing Law", "Complies with Lead Plumbing Law", or either "Lead Free" or "Low Lead" above or in close proximity to the appropriate IAPMO R&T certification mark, or the term "Certified by IAPMO R&T". The product packaging may also bear a grey dot, a check mark with circle, or any other home centers marking requirements.

Characteristics: Products may include any pipe, pipe fitting, solder, flux, or other plumbing products providing water for human consumption. Products listed below are to be installed in accordance with the manufacturer's instruction. These products have been verified with weighted average lead content $\leq 0.25\%$; Solder and flux lead content $\leq 0.2\%$.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.


Chairman, Product Certification Committee


CEO, The IAPMO Group



This listing period is based upon the last date of the month indicated on the Effective Date and Valid After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing.

Corrugated Copper *Water Heater Connectors*

FIP Fittings

- Tube-Copper
- Nut-Brass 3771
- Gasket-High Quality EPDM
- External Dielectric Sleeve



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034C-1010-12	3/4" FIP x 3/4" FIP, Copper Flex, 12"	EA		25
3/4"	EFWC-034C-1010-15	3/4" FIP x 3/4" FIP, Copper Flex, 15"	EA		25
3/4"	EFWC-034C-1010-18	3/4" FIP x 3/4" FIP, Copper Flex, 18"	EA		25
3/4"	EFWC-034C-1010-24	3/4" FIP x 3/4" FIP, Copper Flex, 24"	EA		25



SWEAT Fittings

- Tube-Copper
- Nut-Brass 3771
- Gasket-High Quality EPDM
- External Dielectric Sleeve



ID	Part #	Description	U/M	Price	Qty/ Box
3/4"	EFWC-034C-1060-12	3/4" FIP x 3/4" Sweat, Copper Flex, 12"	EA		25
3/4"	EFWC-034C-1060-15	3/4" FIP x 3/4" Sweat, Copper Flex, 15"	EA		25
3/4"	EFWC-034C-1060-18	3/4" FIP x 3/4" Sweat, Copper Flex, 18"	EA		25
3/4"	EFWC-034C-1060-24	3/4" FIP x 3/4" Sweat, Copper Flex, 24"	EA		25



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

ThermaMIX PRO

WATER HEATER MIXING VALVE



ThermaMix Pro Water Heater Mixing Valve Kit

ThermaMix Pro Mixing Valve Kit

- Thermostatic Mixing Valve
- 18" L, 3/4" FIP x 3/4" FIP Stainless Steel Braided Connector
- Cold Water Tee Fitting
- Union Fitting
- Strainer Gaskets
- Temperature Gauge (optional)

Benefits

- Increases hot water capacity
- Prevents scalds and burns
- Fights legionella bacteria growth
- Clear view of outgoing water temperature
- All-In-One kit

Certifications and Listings

- ASSE 1017
- ASSE 1070 (for EF-MV-01G only)
- NSF/ANSI/CAN 61
- ASSE 1069,
- CSA B125.3 (for EF-MV-01G only)
- NSF/ANSI/CAN 372: Lead Free

Materials

Body	C46500 Brass
Snap Rings	Stainless Steel
Piston	PSU Polymer
Union/Tee Fittings	C46500 Brass
Top Cover	PSU Polymer
Plug Cap	C46500 Brass
Spring	Stainless Steel
Gear	PSU Polymer
O-Rings	EPDM

ThermaMix Pro Mixing Valve Kit + Temperature Gauge

- Body: Brass
- Factory Preset Temp: 105.8°F
- Max. Pressure : 145 psi
- Min/Max Flow Rate: 1 gpm / 12 gpm
- Temperature Gauge Included



Part #	Description	Qty/ Box
EF-MV-01G	3/4" Mixing Valve, 18"L SS Braided Connector, Brass Fittings, Temp Gauge	24



ASSE 1017 / ASSE 1070 / NSF 61 / NSF 372

LEAD FREE



***Thermostatic
Mixing Valve***

Thermostatic Mixing Valve

Specification

Factory Temp. Setting	105.8°F ± 3.6°F
Temp. Adjustment Range	86°F - 120.2°F
Cold Water Supply Temp.	39.2°F - 80.6°F
Hot Water Supply Temp.	120.2°F - 179.6°F
Mix Temp. Stability	35.06°F
Max. Supply Pressure	125psi
Temp. Differential	50°F
Max. Temp.	194°F
Flow Rate Min.	1gpm (1.06gal/min)
Finish	Polish and chrome plated or brass color

* Check valve can be disassembled and cleaned.

Designation Type

Pressure Code (High / Low)	Application	Max Temp.
HP-B / LP-B	Bidet	100.4°F
HP-S / LP-S	Shower	105.8°F
HP-W / LP-W	Wash basin	105.8°F
HP-T44 / LP-T44	Bath	111.2°F
HP-T46 / LP-T46	Bath	114.8°F (3/4")

Certifications

ASSE 1016, ASSE 1069, ASSE 1070, ASSE 1017, CSA B125.3, NSF/ANSI372, NSF/ANSI61 Certified and CSA Listed

Thermostatic Mixing Valve

- Body: Brass
- Factory Preset Temp: 105.8°F ± 3.6°F
- Max. Pressure: 125 psi
- Temperature Adjustment Range: 86°F - 120.2°F
- Max. Temperature: 194°F

Part #	Description	Qty/ Box
EF-MV-12CX	1/2" PEX A Expansion (F1960) MIXING VALVE	12

Part #	Description	Qty/ Box
EF-MV-12PX	1/2" PEX B Crimp(F1807) MIXING VALVE	12



Lead-Free



Tankless Water Heater Isolation Valve Kits

Lead-free compact isolation valves for tankless water heaters.
Drain, purge, and testing applications in one kit.

Tankless Water Heater Isolation Valve Kits

Tankless Water Heater Isolation Valve Kit

- Cold Water Valve
- Hot Water Valve
- Pressure Relief Valve

Features

- Full Port
- 200K-Rated
- 3/4" Female Threaded Connection or Sweat Connection
- Integrated Drain & Purge Port with Cap
- 600 WOG
- Brass (Lead-Free)
- PTFE Seats

Certifications

- NSF 372 Compliant : Lead-Free

Materials

Body	Brass UNS C 46500(ASTM B171)
Ball Valves	Stainless Steel
Ball Disc Packing	PTFE

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Tankless Water Heater *Isolation Valves*



TEST REPORT

5001 East Philadelphia Street
Ontario, California - USA 91761-2810
Ph: 909.472.4100 | Fax: 909.472.4243
<http://www.iapmo.org>

Report Number: 885-14018

Report Issued: February 14, 2014

Project No.: 22839

Client: Kofulso Co., Ltd.
377-8 Gum Gok-Dong Seo-Gu
Incheon City
404-330, South Korea

Source of Samples: The samples were shipped to IAPMO R&T Lab from Kofulso Co., Ltd. and received in good condition on October 16, 2013. Updated PMI received on February 13, 2014.

Date of Evaluation: January 25, 2014 and February 14, 2014

Product Description: Tankless Water Heater Isolation Valves

Model: EF-ISV-HC-LF

Note: The above model includes 1 set of model EF-ISV-H-LF (1ea) and EF-ISV-C-LF (1ea)


Scope of Evaluation: The purpose of the evaluation/testing was to determine whether the samples evaluated ☒ tested met the requirement of NSF/ANSI 372-2011, entitled "Drinking Water System Components-Lead Content"

Conclusion: The samples evaluated/tested of model EF-ISV-HC-LF, Tankless Water Heater Isolation Valves from Kofulso Co., Ltd. met the requirements of NSF/ANSI 372-2011.

By our signatures below we certify that all evaluation, testing and sample preparation for this report was performed under continuous, direct supervision of IAPMO R&T Lab, unless otherwise stated.

Tested By,

Reviewed By,


Frank Lopez, Test Technician


Michael N. Briggs, Manager, Analytical Lab

Page 1 of 3

This report may not be copied, except in its entirety, without the written permission of IAPMO R&T Lab.

Tankless Water Heater *Isolation Valves*

Isolation Valve Kits (FIP Threaded)

Lead-Free

- Hot & Cold Valves
- Optional Pressure Relief Valve (PRV)
- NSF 372 Compliant: Lead-Free
- 3/4" and 1" Size (**FIP Threaded**)
- Brass UNS C46500 (ASTM B171)
- 600 WOG

Part #	Description	UM	Qty/ Box
EFLF-ISV-HC	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold)	EA	16
EFLF-ISV-HCTP	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16
EFLF-ISV-100-HC	1" Lead-Free Tankless Water Heater Service Valves (Hot/Cold)	EA	16
EFLF-ISV-100-HCTP	1" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16



Compact Isolation Valve Kits (FIP Threaded)

Lead-Free

- Hot & Cold **Compact** Valves
- Optional Pressure Relief Valve (PRV)
- NSF 372 Compliant: Lead-Free
- 3/4" Size (**FIP Threaded**)
- Brass UNS C46500 (ASTM B171)
- 600 WOG

Part #	Description	UM	Qty/ Box
EFLF-ISVC-HC	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold)	EA	16
EFLF-ISVC-HCTP	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16



Isolation Valve Kits (Sweat)

Lead-Free

- Hot & Cold Valves
- Optional Pressure Relief Valve (PRV)
- NSF 372 Compliant: Lead-Free
- 3/4" Size (**Sweat**)
- Brass UNS C46500 (ASTM B171)
- 600 WOG

Part #	Description	UM	Qty/ Box
EFLF-ISV-SW-HC	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold)	EA	16
EFLF-ISV-SW-HCTP	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16



Isolation Valve Kits (Press)

Lead-Free

- Hot & Cold Valves
- Optional Pressure Relief Valve (PRV)
- NSF 372 Compliant: Lead-Free
- 3/4" and 1" Size (**Press**)
- Brass UNS C46500 (ASTM B171)
- 600 WOG

Part #	Description	UM	Qty/ Box
EFLF-ISV-P-HC	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold)	EA	16
EFLF-ISV-P-HCTP	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16
EFLF-ISV-100P-HC	1" Lead-Free Tankless Water Heater Service Valves (Hot/Cold)	EA	16
EFLF-ISV-100P-HCTP	1" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16



Isolation Valve Kits (PEX A [F1960] & PEX B [F1807])

Lead-Free

- Hot & Cold Valves
- Pressure Relief Valve (PRV)
- NSF 372 Compliant: Lead-Free
- 3/4" Size (**PEX**)
- Propex End Conform To ASTM F1960
- Large Drain Port Outlets (Full Port)

Part #	Description	UM	Qty/ Box
EFLF-ISV-HCTP-PA	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16
EFLF-ISV-HCTP-PB	3/4" Lead-Free Tankless Water Heater Service Valves (Hot/Cold + PRV)	EA	16



Gas
Connectors

MaxiTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

SOFT-urn

HASSLE FREE **BI-DIRECTIONAL TURN** Tankless Water Heater Isolation Valve



Lead - Free

New lead-free compliant tankless water heater isolation valves featuring a smooth bi-directional turn knob for a smooth, drip tight seal.


- IPS connections
- Rated pressure : 125 psi
- Burst pressure : 500 psi
- Rated supply temperature : 160°F
- Maintains optimal water flow



Lead-Free Tankless Water Heater Isolation Valve Kits

Lead-Free Compact Isolation Valves for Tankless Water Heaters

New Lead-Free compliant tankless water heater isolation valve featuring a smooth bi-directional turn knob for easy maintenance.

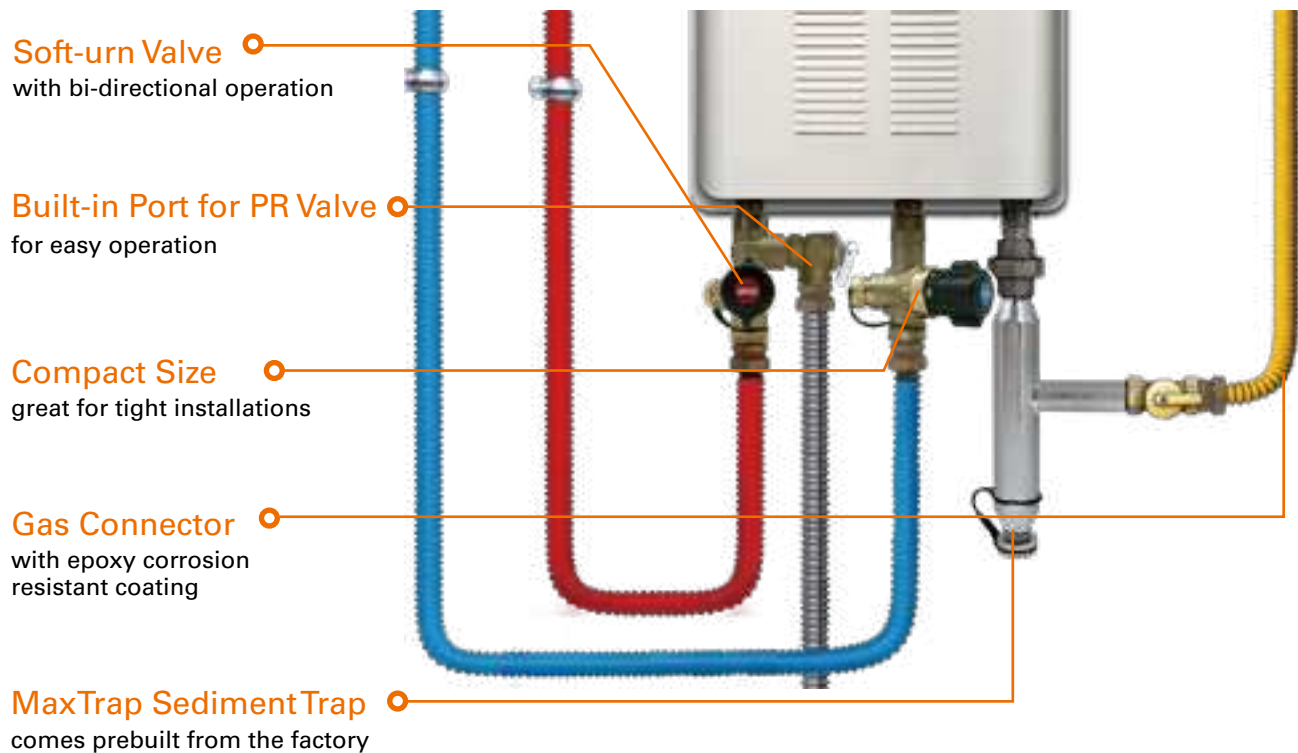

Installation

Easy two-step installation for your tankless water heater with safety features and notable benefits. This is a complete inlet/outlet valve system that provides everything you need for a secure installation, including full port testing and flushing of the system with easy-to-install union connections.



Lead-Free Tankless Water Heater Isolation Valves



TEST REPORT

5001 East Philadelphia Street
Ontario, California - USA 91761-2816
Ph: 909.472.4100 | Fax: 909.472.4243
<http://www.iapmorli.org>

Report Number: 885-14017 Project No.: 22830

Report Issued: February 11, 2014

Client: Kofulso
377-8 Gam Gok-Dong Seo-Gu
Incheon City, South Korea 404-330

Contact: Hun Kim

Source of Samples: The samples were sent by Kofulso, and received by IAPMO R&T Lab in good condition on January 08, 2014.

Date of Testing: January 16, 2014 through February 11, 2014

Sample Description: Isolation valves for Instantaneous Water Heaters.

Model number	Description
EF-ISV-H2	Tankless Water Heater Hot service valve
EF-ISV-C2	Tankless Water Heater Cold service valve

Scope of Testing: The purpose of the testing was to determine if the samples tested of the isolation valves met the applicable requirements of ASME A112.18.1-2012/CSA B125.1-12, entitled, "Plumbing Supply Fittings".

Conclusion: the samples tested of the isolation valves, models listed above, from Kofulso COMPLIED with the applicable requirements of ASME A112.18.1-2012/CSA B125.1-12.

Pending: NSF61/372

By our signatures below, we certify that all the testing and sample preparation for this report was performed under continuous, direct supervision of IAPMO R&T Lab, unless otherwise stated.

Tested by,

Reviewed by,

Vinh Nguyen, Test Technician

Sean Vu, P.E., Manager, Specialty Projects

This report may not be copied, except in its entirety, without the written permission of IAPMO R&T Lab.

Lead-Free Tankless Water Heater Isolation Valve Kits

Lead-Free Tankless Water Heater Isolation Valve Kit 1

- Hot & Cold Valve
- Complies to NSF 61 and 372
- 3/4" Size (FIP Threaded)
- Brass
- Rated pressure: 125 psi
- Burst pressure: 500 psi
- Rated supply temperature: 160° F



Part #	Description	U/M	Price	Qty/ Box
EF-ISV-2	Lead-Free Tankless Water Heater Service Valves, Hot & Cold Valve	EA		12



Lead-Free Tankless Water Heater Isolation Valve Kit 2

- Hot & Cold Valve
- Pressure Relief Valve
- Complies to NSF 61 and 372
- 3/4" Size (FIP Threaded)
- Brass
- Rated pressure: 125 psi
- Burst pressure: 500 psi
- Rated supply temperature: 160° F



Part #	Description	U/M	Price	Qty/ Box
EF-ISV-2PR	Lead-Free Tankless Water Heater Service Valves, Hot & Cold Valve w/ Pressure Relief Valve	EA		12



Lead-Free Tankless Water Heater Isolation Valve Kit 3 (Sweat)

- Hot & Cold Valve
- Complies to NSF 61 and 372
- 3/4" Size (Sweat Threaded)
- Brass
- Rated pressure: 125 psi
- Burst pressure: 500 psi
- Rated supply temperature: 160° F



Part #	Description	U/M	Price	Qty/ Box
EF-ISV-2-SW	Lead-Free Tankless Water Heater Service Valves, Hot & Cold Valve (Sweat Type)	EA		12



Lead-Free Tankless Water Heater Isolation Valve Kit 4 (Sweat)

- Hot & Cold Valve
- Pressure Relief Valve
- Complies to NSF 61 and 372
- 3/4" Size (Sweat Threaded)
- Brass
- Rated pressure: 125 psi
- Burst pressure: 500 psi
- Rated supply temperature: 160° F



Part #	Description	U/M	Price	Qty/ Box
EF-ISV-2SW-PR	Lead-Free Tankless Water Heater Service Valves, Hot & Cold Valve w/ Pressure Relief Valve (Sweat Type)	EA		12



Gas Connectors

MaxiTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops



CUSTOMIZE YOUR KIT

Tankless Water Heater *Connection Kit*

Tankless Water Heater Connection Kit




- Soft-urn or Ball Valve Type Isolation Valves
- PRV (Pressure Relief Valve)
- 3/4" Water Connectors (FIP×FIP/MIP×FIP)
- 3/4"×1/2" Gas Connector (MIP×MIP/MIP×FIP)

Part #	Description	Qty/ Box
EF-TWH-Kit-1	(2) Isolation Valves / (1) PRV / (2) Water Connectors / (1) Gas Connector	1



Tankless Water Heater **Connection Kit**

Contents

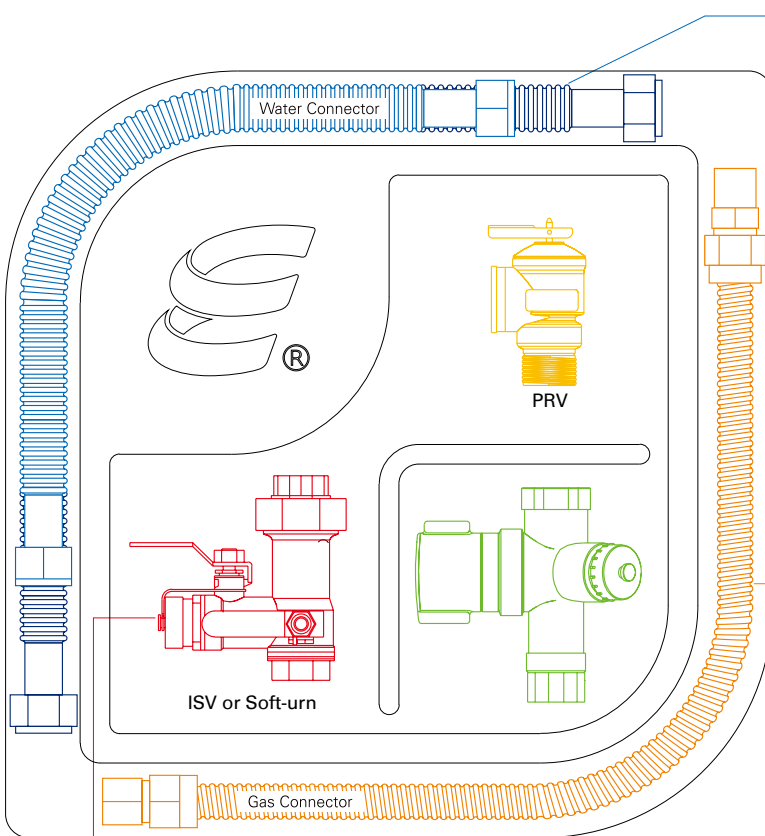


2 Water Connectors



ID(OD)	Length
☐ 3/4" ☐ 1"	☐ 18" ☐ 24"
Fittings	
☐ FIP x FIP	☐ FIP x SWEAT
☐ FIP x MIP	☐ FIP x Pex Barb

1 Gas Connector

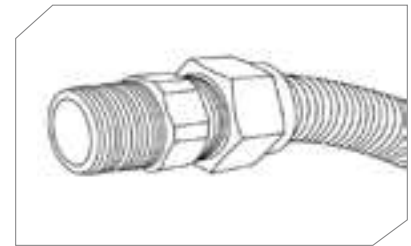


ID(OD)	Type
☐ 1/2" (5/8" OD)	☐ SS (Stainless steel)
☐ 3/4" (1" OD)	☐ YE (Yellow coated)
Length	Fittings
☐ 18"	☐ 3/4" MIP x 3/4" FIP
☐ 24"	☐ 1/2" MIP x 1/2" MIP
	☐ 1/2" MIP x 3/4" MIP
	☐ 1/2" MIP x 1/2" FIP
	☐ 3/4" MIP x 3/4" MIP

Isolation Valve



☐ **Soft-urn** (Dial - knob type)

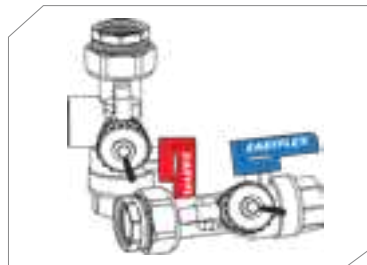

☐ **Isolation Valves** (Ball valve type)

- Customizable Tankless Water Heater Connection Kits
- Traditional Ball Valves or Easyflex Soft-urn Valves
- 2 Flexible Water Heater Connections - Your Choice of Size and Fittings
- 1 Flexible Gas Connector - Your Choice of Size and Fittings
- Everything You Need In One Box

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops



Thermal Expansion Tanks

Designed to protect potable water heater systems while maintaining operational efficiency.



Thermal Expansion Tanks

Features

- Stainless Steel 3/4" MIP with Hex
- Butyl Rubber Diaphragm
- NSF 61 Compliant
- Factory Pre-Charged to 40 psig
- Limited 6-Year Warranty

Benefits

- Protects water heaters, fixtures and appliances
- Prevents dangerous pressure build up
- Stainless steel connector
- Provides a reservoir for expanded water volume

Certifications

- cUPC



Materials

Shell	16 gauge, cold rolled steel
Diaphragm	100% butyl rubber, lined with polypropylene
Connection	Stainless steel

Pressure-Temperature

Connection Size	3/4" MIP
Tank Volume	2 Gallons / 4.5 Gallons
Factory Pre-Charge	40 psi
Max. Pressure	150 psi
Max. Temperature	200°F

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Thermal Expansion Tanks



Thermal Expansion Tank (Water Heater Safety)

Built with a heavy duty butyl diaphragm system to absorb the expansion of water volume and helps prevent dangerous pressure build-up.

Stainless Steel

water connection to
reduce corrosion

100% Pressure Tested

16 Gauge Solid Steel Shell

is finished with high quality
urethane paint

Steel Clench Ring Regulates Movement

and prevents the diaphragm
from rubbing against the
tank wall



Easyflex Tank One water expansion tanks are designed to maintain safe pressures in a domestic water heating system that utilizes a backflow preventer or check valve. Tank One tanks feature a butyl rubber diaphragm and plastic liner to separate the system water from the tank's air charge. The system connection has a stainless steel nipple to help prevent corrosion. High quality coating on the shell helps prevent external corrosion. Every Tank One tank is comprehensively tested and backed by an Easyflex 6 year limited warranty.

Materials

- Shell: 16 Gauge Cold Rolled Steel
- Finish: High Quality Coating Prevents Corrosion
- Diaphragm: 100% Butyl Rubber, Lined w/ Polypropylene
- Connection: Stainless Steel 3/4" MIP
- Air Charging Port: Brass Port with O-ring Seal

Thermal Expansion Tanks and Mounting Bracket



Thermal Expansion Tank

- Shell: 16 Gauge Steel
- Stainless Steel Connection : 3/4" MIP
- Max. Pressure : 150 psi
- Max. Temperature : 200°F



Part #	Description	U/M	Price	Qty/ Box
EF-TET-2	Thermal Expansion Tank, 2.1 Gallons	EA		1



Thermal Expansion Tank

- Shell: 16 Gauge Steel
- Stainless Steel Connection : 3/4" MIP
- Max. Pressure : 150 psi
- Max. Temperature : 200°F



Part #	Description	U/M	Price	Qty/ Box
EF-TET-4	Thermal Expansion Tank, 4.5 Gallons	EA		1



Thermal Expansion Tank Mounting Bracket

- Support Straps: Stainless Steel
- Mounting Rail: Galvanized Steel
- Easy to Install
- Corrosion Resistant
- Fits 2.1 and 4.5 Gallon Tanks

Part #	Description	U/M	Price	Qty/ Box
EF-TET-MT	Thermal Expansion Tank Mounting Bracket	EA		1



No Hub Couplings Cast Iron Soil Pipe Connections

Standard, Heavy Duty, and Reducing No-hub Couplings for all types of pipe connections.



No-Hub Couplings

Cast Iron Soil Pipe Connections

Applications

Provides a fast and easy fit for joining hubless cast iron soil pipes and fittings in drain waste and vent applications.

Benefits

- Soft Rubber Gaskets that Mold to the Pipes
- Water Tight Seal
- Low Expansion and Contraction
- Resistance to Vibrations

Certifications & Approvals

- UPC
- CSA
- NSF
- Conforms to CISPI 310, ASTM C1277 (Super Shield ASTM C1540)



Materials

Clamp	304 Stainless Steel
Housing	304 Stainless Steel
Screw	5/16" Hex, SS 304 Stainless Steel
Shield	Thickness: 0.007" 304 Stainless Steel
Gasket	Elastomeric compound conforming to ASTM C564

Technical Specifications

Installation Torque	60 in-lbs (Super Shield 80 in-lbs)
---------------------	------------------------------------

Gas Connectors

MaxTrap

Commercial Gas Connectors

Braided Water Connectors

Supply Stop Valves

Water Heater Connectors

Thermostatic Mixing Valves

Isolation Valves

Thermal Expansion Tanks

No Hub Couplings

Flexible Couplings

Flexible Sprinkler Drops

No-Hub Couplings **Cast Iron Soil Pipe Connections**

Submittal No-Hub Couplings

Easyflex No-Hub Couplings meet CISPI 310-2011 and ASTM C 1277-2012 standards. Couplings consist of a stainless steel shield, clamp assembly and a gasket manufactured from a properly vulcanized virgin compound in which the primary elastomer is polychloroprene conforming to ASTM C 564.



Coupling sizes range 1-1/2" through 15" diameters. The stainless steel shield and clamp assemblies are corrosion resistant.

Sleeve Test

Test	Physical Tests Min or Max Requirements	ASTM
Tensile Strength	1500 psi min.	D412
Elongation	250 min.	D412
Durometer	70 ± 5 @ 76° F ± 5° F	D2240
Accelerated aging	15% maximum tensile and 20% maximum elongation deterioration, 10 points maximum increase in hardness, all determinations after oven aging for 96 hours at 158°F	D573
Compression Set	25% maximum after 22 hours at 158° F	D395
Oil Immersion	80% maximum volume change after immersion in IRM 903 for 70 hours at 212° F	D471
Ozone Cracking	No visible cracking at 2 times magnification of the gasket after 100 hours exposure in 1.5ppm ozone concentration at 100°F. Testing and inspection to be on gasket which is loop mounted to give approximately 20% elongation of outer surface.	D1149
Tear Resistance	150 lbs. minimum per inch of thickness	D624
Water Absorption	20% maximum by weight after 7 days at 158° F	D471

	Size	Shield Width	No. of Camps	Torque (Inch Pounds)
Standard	1-1/2", 2", 3", 4"	2-1/8"	2	60
	5", 6"	3"	4	60
	8", 10"	4"	4	60
	12", 15"	4"	6	60
Standard NSF	1-1/2", 2", 3", 4"	-	2	60
	5", 6", 8", 10"	-	4	60
Heavy Duty	2", 3", 4"	3"	4	60
	5", 6", 8", 10", 12", 15"	4"	6	60
Super Shielded	1-1/2", 2", 3", 4"	-	4	80
	5", 6", 8", 10"	-	6	80
Reducing	2" x 1-1/2", 3" x 2", 4" x 2", 4" x 3"	2-1/8"	2	60

No-Hub Couplings **Cast Iron Soil Pipe Connections**



Descriptive and Test Report

MASTER CONTRACT: 219663

REPORT: 1467490

PROJECT: 2260094

- Edition 1:** September 09, 2003; Project 1467490 - Cleveland
Issued by Steve Tucky; Reviewed by Trevor Perera
- Edition 2:** September 23, 2008; Project 2078602 - Toronto
Issued by Ramiro Mata; Reviewed by Matthew Tomasic
- Edition 3:** February 9, 2010; Project 2260094 - Toronto
Issued by Kelly Yaremko; Reviewed by Gabriel Lipka

Contents: Certificate of Compliance - Page 1
Supplement to Certificate of Compliance - Page 1
Description and Tests - Pages 1 to 3
Figures - 1 to 18

PRODUCTS

CLASS 7021 01 - PIPE AND PIPE FITTINGS- Mechanical Joints (Non-Transitional Type)

CLASS 7021 02 - PIPE AND PIPE FITTINGS- Mechanical Coupling Mechanical joint (MJ) couplings, for use with plain-end cast iron soil pipe and pipe fittings

Same size pipe fittings: 1-1/2, 2, 3, 4, 5, 6, 8, 10 inch. (Corrugated Shield)

Reduced size pipe fittings: 2 x 1-1/2, 3 x 2, 4 x 3, 4 x 2 inch. (Corrugated Shield)

APPLICABLE REQUIREMENTS

CSA Standard CSA-B70-02 Cast Iron Soil Pipe, Fittings, and Means of Joining

CSA Standard CSA-B602-05 Mechanical Couplings for Drain, Waste, and Vent Pipe and Sewer Pipe

MARKINGS

The following permanent marking appears on the products in an acceptable manner.



Certification Marking: CSA Monogram. on rubber gasket and shield.

The test report shall not be reproduced, except in full, without the approval of CSA International.

178 Rexdale Boulevard, Toronto, ON, Canada M9W 1R3

Telephone: 416.747.4000 1.800.483.6727 Fax: 416.747.4149 www.csa-international.org

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

No-Hub Couplings *Cast Iron Soil Pipe Connections*

No-Hub Coupling | Standard

- Clamp / Housing : 304 Stainless Steel
- Screw : 304 Stainless Steel



Part #	Description	U/M	Price	Qty/ Box
EF-NHC-112	1-1/2" No-Hub Coupling, 2 Bands	EA		100
EF-NHC-200	2" No-Hub Coupling, 2 Bands	EA		100
EF-NHC-300	3" No-Hub Coupling, 2 Bands	EA		100
EF-NHC-400	4" No-Hub Coupling, 2 Bands	EA		100
EF-NHC-500	5" No-Hub Coupling, 4 Bands	EA		30
EF-NHC-600	6" No-Hub Coupling, 4 Bands	EA		30
EF-NHC-800	8" No-Hub Coupling, 4 Bands	EA		15
EF-NHC-1000	10" No-Hub Coupling, 4 Bands	EA		12
EF-NHC-1200	12" No-Hub Coupling, 6 Bands	EA		8
EF-NHC-1500	15" No-Hub Coupling, 6 Bands	EA		4



No-Hub Coupling | Reducing

- Clamp / Housing : 304 Stainless Steel
- Screw : 304 Stainless Steel



Part #	Description	U/M	Price	Qty/ Box
EF-NHC-R2112	2"x1-1/2" Reducing No-Hub Coupling, 2 Bands	EA		100
EF-NHC-R3200	3"x2" Reducing No-Hub Coupling, 2 Bands	EA		100
EF-NHC-R4200	4"x3" Reducing No-Hub Coupling, 2 Bands	EA		100
EF-NHC-R4300	4"x3" Reducing No-Hub Coupling, 2 Bands	EA		100



No-Hub Coupling | Heavy Duty

- Clamp / Housing : 304 Stainless Steel
- Screw : 304 Stainless Steel
- Shield : 0.007" 304 Stainless Steel



Part #	Description	U/M	Price	Qty/ Box
EF-NHC-200HD	2" Heavy Duty No-Hub Coupling, 4 Bands	EA		75
EF-NHC-300HD	3" Heavy Duty No-Hub Coupling, 4 Bands	EA		48
EF-NHC-400HD	4" Heavy Duty No-Hub Coupling, 4 Bands	EA		48
EF-NHC-500HD	5" Heavy Duty No-Hub Coupling, 6 Bands	EA		15
EF-NHC-600HD	6" Heavy Duty No-Hub Coupling, 6 Bands	EA		15
EF-NHC-800HD	8" Heavy Duty No-Hub Coupling, 6 Bands	EA		15
EF-NHC-1000HD	10" Heavy Duty No-Hub Coupling, 6 Bands	EA		12
EF-NHC-1200HD	12" Heavy Duty No-Hub Coupling, 8 Bands	EA		8
EF-NHC-1500HD	15" Heavy Duty No-Hub Coupling, 8 Bands	EA		4



No-Hub Couplings *Cast Iron Soil Pipe Connections*

No-Hub Coupling | NSF

- Clamp/ Housing : SS 304 Stainless Steel
- Screw : SS 304 Stainless Steel
- Shield : 0.007" SS 304 Stainless Steel



Part #	Description	U/M	Price	Qty/ Box
EF-NHC-112N	1-1/2" No-Hub Coupling, 2 Bands, NSF	EA		100
EF-NHC-200N	2" No-Hub Coupling, 2 Bands, NSF	EA		100
EF-NHC-300N	3" No-Hub Coupling, 2 Bands, NSF	EA		100
EF-NHC-400N	4" No-Hub Coupling, 2 Bands, NSF	EA		100
EF-NHC-500N	5" No-Hub Coupling, 4 Bands, NSF	EA		30
EF-NHC-600N	6" No-Hub Coupling, 4 Bands, NSF	EA		30
EF-NHC-800N	8" No-Hub Coupling, 4 Bands, NSF	EA		15
EF-NHC-1000N	10" No-Hub Coupling, 4 Bands, NSF	EA		12



No-Hub Coupling | Super Shielded

- Clamp/ Housing : 304 Stainless Steel
- Screw : 304 Stainless Steel
- Shield : 0.007" 304 Stainless Steel



Part #	Description	U/M	Price	Qty/ Box
EF-NHC-200SS	2" No-Hub Coupling, 4 Bands, 3/8" HEX-Head	EA		75
EF-NHC-300SS	3" No-Hub Coupling, 4 Bands, 3/8" HEX-Head	EA		48
EF-NHC-400SS	4" No-Hub Coupling, 4 Bands, 3/8" HEX-Head	EA		48
EF-NHC-500SS	5" No-Hub Coupling, 6 Bands, 3/8" HEX-Head	EA		15
EF-NHC-600SS	6" No-Hub Coupling, 6 Bands, 3/8" HEX-Head	EA		15
EF-NHC-800SS	8" No-Hub Coupling, 6 Bands, 3/8" HEX-Head	EA		15
EF-NHC-1000SS	10" No-Hub Coupling, 6 Bands, 3/8" HEX-Head	EA		10



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops



Flexible Couplings Cast Iron & Plastic Pipe

Standard, Reducing, and Shielded Couplings for underground sewage, drain, waste, and vent piping applications.

Flexible Couplings

Cast Iron & Plastic Pipe

Applications

Provides a fast and easy fit for joining cast iron and/or plastic pipes and fittings in underground drain waste and vent applications.

Benefits

- Soft Rubber Gaskets Connect Pipes Easily
- Water Tight Seal
- Low Expansion and Contraction
- Resistance to Vibrations, Chemicals, and Fungus
- Rust and Corrosion Proof Stainless Steel Clamps

Certifications & Approvals

- UPC
- CSA
- Conforms to ASTM C1173,D5926 & IAPMO 4933

Materials

Band/Clamp	Stainless Steel 300 Series
Housing	Stainless Steel 300 Series
Screw	5/16" Hex, Stainless Steel 305 and/or 304L
Shield/Rivet	Stainless Steel 300 Series
Gasket	Elastomeric PVC (ASTM D5926,C1173)

Technical Specifications

Installation Torque	60 in-lbs
---------------------	-----------



Flexible Couplings | Standard & Reducing

- Clamp / Band / Housing : Stainless Steel 300 Series
- Screw : 5/16" Hex, Stainless Steel 305 and/or 304L

Part #	Description	U/M	Qty/ Box
EF-FCP-112	1-1/2" Flexible Coupling, 2 Bands	EA	50
EF-FCP-114	1-1/4" Flexible Coupling, 2 Bands	EA	50
EF-FCP-200	2" Flexible Coupling, 2 Bands	EA	50
EF-FCP-300	3" Flexible Coupling, 2 Bands	EA	30
EF-FCP-400	4" Flexible Coupling, 2 Bands	EA	30
EF-FCP-600	6" Flexible Coupling, 2 Bands	EA	12
EF-FCP-R112114	1-1/2" to 1-1/4" Reducing Flexible Coupling, 2 Bands	EA	50
EF-FCP-R200112	2" to 1-1/2" Reducing Flexible Coupling, 2 Bands	EA	50
EF-FCP-R300112	3" to 1-1/2" Reducing Flexible Coupling, 2 Bands	EA	30
EF-FCP-R300200	3" to 2" Reducing Flexible Coupling, 2 Bands	EA	30
EF-FCP-R400300	4" to 3" Reducing Flexible Coupling, 2 Bands	EA	30
EF-FCP-R600400	6" to 4" Reducing Flexible Coupling, 2 Bands	EA	12



Part #	Description	U/M	Qty/ Box
EF-FCP-112SS	1-1/2" Shielded Flexible Coupling, 3 Bands	EA	50
EF-FCP-114SS	1-1/4" Shielded Flexible Coupling, 3 Bands	EA	50
EF-FCP-200SS	2" Shielded Flexible Coupling, 4 Bands	EA	50
EF-FCP-300SS	3" Shielded Flexible Coupling, 4 Bands	EA	30
EF-FCP-400SS	4" Shielded Flexible Coupling, 4 Bands	EA	30
EF-FCP-600SS	6" Shielded Flexible Coupling, 4 Bands	EA	12



Gas Connectors
MaxTrap
Commercial Gas Connectors
Braided Water Connectors
Supply Stop Valves
Water Heater Connectors
Thermostatic Mixing Valves
Isolation Valves
Thermal Expansion Tanks
No Hub Couplings
Flexible Couplings
Flexible Sprinkler Drops

A detailed 3D rendering of a commercial fire sprinkler system. Two flexible, braided metal hoses are shown, each connected to a stainless steel sprinkler head. The hoses are attached to a complex metal framework that allows for flexible movement. The background shows a grid of metal beams, suggesting a ceiling or floor structure. The overall design is sleek and industrial.

Commercial Flexible Fire Sprinkler Drops

The best solution for renovations and new construction.



Commercial Flexible Fire Sprinkler Drops

Features & Materials

Lengths Available	Unbraided	28", 40", 48", 60", 67"
	Braided	24", 36", 48", 60", 72"
Outlet	1/2", 3/4"(Straight or 90° Elbow)	
Types	Unbraided	Braided
Hose Type	Stainless Steel 304	
Nut & Nipple	Zinc-Plated Steel	
Sealing Gasket / Isolation Ring	EPDM / NYLON	

UNBRAIDED HOSE



BRAIDED HOSE



Certifications

- UL
- FM



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks


No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Commercial *Flexible Fire Sprinkler Drops*

Braided Flexible Hose (Standard: Nominal 1" ID)

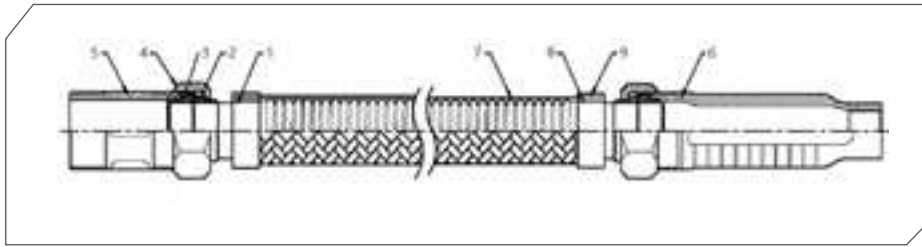

1. Tube
2. Isolation Ring
3. Sealing Gasket
4. Nut
5. Nipple (1")
6. Reducer
7. Braid
8. Press Ring (Inner)
9. Press Ring (Outer)

Specifications

Max.Temp.	225°F	
Max.Pressure.	175 psi	
Min. Bend Radius	4"	
K-Factors	1/2" Outlet	5.6
	3/4" Outlet	8.0

*DO NOT bend within 2.52" from the connection nuts

Size & Length

Outlet	1/2", 3/4"
Inlet	1" NPT
Length	24", 36", 48", 60", 72"

Friction Loss Data

EFB Series Braided Hose / TBS Bracket Systems



Lengths (in.)	Outlet Connection	Maximum Number of 90° Bends	Equivalent Length of 1in. Schedule 40 Pipe, ft.
24"	1/2"	1	18
	3/4"	1	18
36"	1/2"	2	31
	3/4"	2	34
48"	1/2"	3	48
	3/4"	3	51
60"	1/2"	4	60
	3/4"	4	65
72"	1/2"	4	71
	3/4"	4	72

* UL: 4" minimum bend radius, where C=120

Braided

- Materials : Stainless Steel 304




Part #	Description	U/M	Price	Qty/ Box
EFB 224	1/2" FIP x 1" MIP	EA		20
EFB 324	3/4" FIP x 1" MIP	EA		20
EFB 236	1/2" FIP x 1" MIP	EA		20
EFB 336	3/4" FIP x 1" MIP	EA		20
EFB 248	1/2" FIP x 1" MIP	EA		10
EFB 348	3/4" FIP x 1" MIP	EA		10
EFB 260	1/2" FIP x 1" MIP	EA		10
EFB 360	3/4" FIP x 1" MIP	EA		10
EFB 272	1/2" FIP x 1" MIP	EA		10
EFB 372	3/4" FIP x 1" MIP	EA		10



Commercial Flexible Fire Sprinkler Drops

Braided Flexible Hose (Standard: Nominal 1" ID)

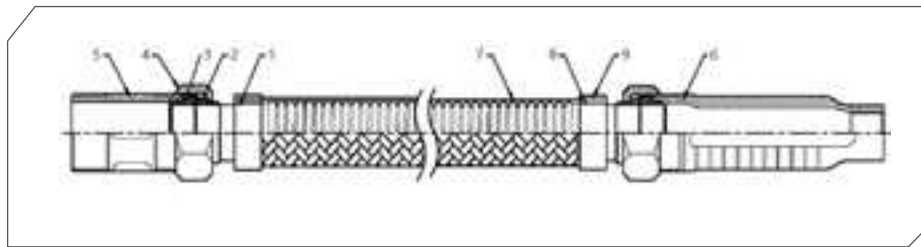

1. Tube
2. Isolation Ring
3. Sealing Gasket
4. Nut
5. Nipple (1")
6. Reducer
7. Braid
8. Press Ring (Inner)
9. Press Ring (Outer)

Specifications

Max. Temp.	225°F	
Max. Pressure.	175 psi	
Min. Bend Radius	8"	
K-Factors	1/2" Outlet	5.6
	3/4" Outlet	8.0

*DO NOT bend within 2.52" from the connection nuts

Size & Length

Outlet	1/2", 3/4"
Inlet	1" NPT
Length	24", 36", 48", 60", 72"

Friction Loss Data

EFB Series Braided Hose / OGSB, TBS Bracket Systems



Lengths (in)	Outlet Connection	Maximum Number of 90° Bends	Equivalent Length of 1 in. Schedule 40 Pipe, ft. (with straight outlet)	Equivalent Length of 1 in. Schedule 40 Pipe, ft. (with 90° outlet)
24"	1/2"	1	270	28.4
	3/4"	1	18.6	19.7
36"	1/2"	1	37.4	38.8
	3/4"	1	30.4	30.9
48"	1/2"	1	54.9	57.1
	3/4"	1	48.3	50.4
60"	1/2"	1	72.5	75.4
	3/4"	1	66.2	69.9
72"	1/2"	1	90.5	90.9
	3/4"	1	83.0	84.5

FM : 8" minimum bend radius, where C=120

Braided


- Materials : Stainless Steel 304



Part #	Description	U/M	Price	Qty/ Box
EFB 224	1/2" FIP x 1" MIP	EA		20
EFB 324	3/4" FIP x 1" MIP	EA		20
EFB 236	1/2" FIP x 1" MIP	EA		20
EFB 336	3/4" FIP x 1" MIP	EA		20
EFB 248	1/2" FIP x 1" MIP	EA		10
EFB 348	3/4" FIP x 1" MIP	EA		10
EFB 260	1/2" FIP x 1" MIP	EA		10
EFB 360	3/4" FIP x 1" MIP	EA		10
EFB 272	1/2" FIP x 1" MIP	EA		10
EFB 372	3/4" FIP x 1" MIP	EA		10

Commercial *Flexible Fire Sprinkler Drops*

Braided Flexible Hose (Ultra Performance: 1-1/4" ID)

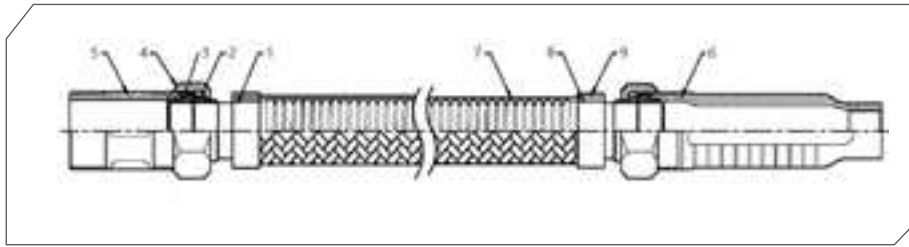

1. Tube
2. Isolation Ring
3. Sealing Gasket
4. Nut
5. Nipple (1")
6. Reducer
7. Braid
8. Press Ring (Inner)
9. Press Ring (Outer)

Specifications

Max. Temp.	300°F	
Max. Pressure	300 psi	
Min. Bend Radius*	2.5"	
Max. Allowable K-Factors	1/2" Outlet	8.0
	3/4" Outlet	14.0

*DO NOT bend within 2.52" from the connection nuts

Size & Length

Outlet	1/2", 3/4"
Inlet	1" NPT
Length	24", 36", 48", 60", 72"

Friction Loss Data

EFB UP Series Braided Hose / OGSB, TBSL Bracket Systems



Lengths (in)	Outlet Connection	K-Factor	Maximum Number of 90° Bends	Equivalent Length of 1in. Schedule 40 Pipe, ft.
24"	1/2"	5.6	2	3
	3/4"	8.0	2	10
36"	1/2"	5.6	5	12
	3/4"	8.0	5	22
48"	1/2"	5.6	8	19
	3/4"	8.0	8	34
60"	1/2"	5.6	10	26
	3/4"	8.0	10	40
72"	1/2"	5.6	12	37
	3/4"	8.0	12	46

UL : 2.5" minimum bend radius, where C=120

Braided


- Materials : Stainless Steel 304



Part #	Description	U/M	Price	Qty/ Box
EFB 224UP	1/2" FIP x 1" MIP	EA		20
EFB 324UP	3/4" FIP x 1" MIP	EA		20
EFB 236UP	1/2" FIP x 1" MIP	EA		20
EFB 336UP	3/4" FIP x 1" MIP	EA		20
EFB 248UP	1/2" FIP x 1" MIP	EA		10
EFB 348UP	3/4" FIP x 1" MIP	EA		10
EFB 260UP	1/2" FIP x 1" MIP	EA		10
EFB 360UP	3/4" FIP x 1" MIP	EA		10
EFB 272UP	1/2" FIP x 1" MIP	EA		10
EFB 372UP	3/4" FIP x 1" MIP	EA		10

Commercial Flexible Fire Sprinkler Drops

Braided Flexible Hose (Ultra Performance: 1-1/4" ID)

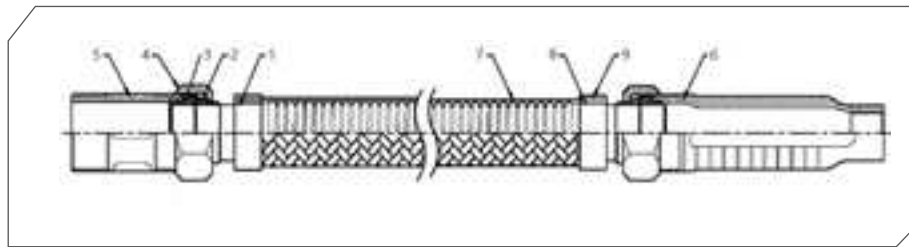

1. Tube
2. Isolation Ring
3. Sealing Gasket
4. Nut
5. Nipple (1")
6. Reducer
7. Braid
8. Press Ring (Inner)
9. Press Ring (Outer)

Specifications

Max.Temp.	225°F	
Max. Pressure	225 psi	
Min. Bend Radius	6.5"	
K-Factors	1/2" Outlet	5.6 / 8.0
	3/4" Outlet	8.0 / 14.0

*DO NOT bend within 2.52" from the connection nuts

Size & Length

Outlet	1/2", 3/4"
Inlet	1" NPT or 1-1/4" Grooved
Length	24", 36", 48", 60", 72"

Friction Loss Data

EFB UP Series Braided Hose / OGSB, TBS Bracket Systems



Lengths (in)	Outlet Connection	K-Factor	Maximum Number of 90° Bends	Equivalent Length of 1in. Schedule 40 Pipe, ft.
24"	1/2"	5.6 / 8.0	1	2.1 / 3.6
	3/4"	8.0 / 14.0	1	3.6 / 3.8
36"	1/2"	5.6 / 8.0	2	4.5 / 5.1
	3/4"	8.0 / 14.0	2	6 / 6
48"	1/2"	5.6 / 8.0	3	6.9 / 6.6
	3/4"	8.0 / 14.0	3	8.4 / 8.3
60"	1/2"	5.6 / 8.0	4	9.4 / 8.1
	3/4"	8.0 / 14.0	4	10.9 / 10.6
72"	1/2"	5.6 / 8.0	4	11.9 / 9.7
	3/4"	8.0 / 14.0	4	13.4 / 12.9

FM : 6.5" minimum bend radius, where C=120

Braided


- Materials : Stainless Steel 304



Part #	Description	U/M	Price	Qty/ Box
EFB 224UP	1/2" FIP x 1" MIP	EA		20
EFB 324UP	3/4" FIP x 1" MIP	EA		20
EFB 236UP	1/2" FIP x 1" MIP	EA		20
EFB 336UP	3/4" FIP x 1" MIP	EA		20
EFB 248UP	1/2" FIP x 1" MIP	EA		10
EFB 348UP	3/4" FIP x 1" MIP	EA		10
EFB 260UP	1/2" FIP x 1" MIP	EA		10
EFB 360UP	3/4" FIP x 1" MIP	EA		10
EFB 272UP	1/2" FIP x 1" MIP	EA		10
EFB 372UP	3/4" FIP x 1" MIP	EA		10

Commercial *Flexible Fire Sprinkler Drops*

Braided Flexible Hose (High Performance: 1" ID)



1. Tube
2. Isolation Ring
3. Sealing Gasket
4. Nut
5. Nipple (1")
6. Reducer
7. Braid
8. Press Ring (Inner)
9. Press Ring (Outer)

Specifications

Max.Temp.	225°F	
Max.Pressure.	175 psi	
Min. Bend Radius	8"	
K-Factors	1/2" Outlet	5.6
	3/4" Outlet	8.0 / 14.0

Size & Length

Outlet	1/2", 3/4"
Inlet	1" NPT
Length	24", 36", 48", 60", 72"

Friction Loss Data

EFB HP Series Braided Hose / OGSB, TBS Bracket Systems



Lengths (in)	Outlet Connection	K-Factor	Maximum Number of 90° Bends	Equivalent Length of 1in. Schedule 40 Pipe, ft.
24"	1/2"	5.6	1	17.8
	3/4"	8.0 / 14.0	1	8.3 / 8.3
36"	1/2"	5.6	2	23.0
	3/4"	8.0 / 14.0	2	13.9 / 13.7
48"	1/2"	5.6	3	30.2
	3/4"	8.0 / 14.0	3	21.7 / 21.6
60"	1/2"	5.6	4	37.4
	3/4"	8.0 / 14.0	4	29.5 / 29.5
72"	1/2"	5.6	4	43.3
	3/4"	8.0 / 14.0	4	34.5 / 33.2

FM : 8" minimum bend radius, where C=120

Braided

- Materials : Stainless Steel 304




Part #	Description	U/M	Price	Qty/ Box
EFB 224HP	1/2" FIP x 1" MIP	EA		20
EFB 324HP	3/4" FIP x 1" MIP	EA		20
EFB 236HP	1/2" FIP x 1" MIP	EA		20
EFB 336HP	3/4" FIP x 1" MIP	EA		20
EFB 248HP	1/2" FIP x 1" MIP	EA		10
EFB 348HP	3/4" FIP x 1" MIP	EA		10
EFB 260HP	1/2" FIP x 1" MIP	EA		10
EFB 360HP	3/4" FIP x 1" MIP	EA		10
EFB 272HP	1/2" FIP x 1" MIP	EA		10
EFB 372HP	3/4" FIP x 1" MIP	EA		10



Commercial *Flexible Fire Sprinkler Drops*

Unbraided Flexible Hose

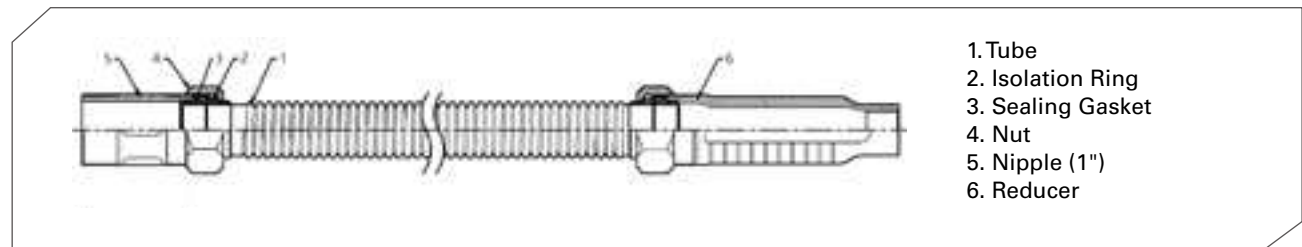

Specifications

Max. Temp.	150°F	
Max. Pressure.	203 psi	
Min. Bend Radius	4"	
K-Factors	1/2" Outlet	5.6
	3/4" Outlet	8.0

Size & Length

Outlet	1/2", 3/4"
Inlet	1" NPT
Length	28", 40", 48", 60", 67"

Friction Loss Data

EFU Series Unbraided Hose / TBSS



Lengths (in.)	Outlet Connection	Maximum Number of 90° Bends	Equivalent Length of 1in. Schedule 40 Pipe, ft.
28"	1/2"	2	23
	3/4"	2	28
40"	1/2"	3	39
	3/4"	3	40
48"	1/2"	3	48
	3/4"	3	51
60"	1/2"	4	60
	3/4"	4	65
67"	1/2"	4	68
	3/4"	4	70

* UL: 4" Minimum bend radius, where C=120

Unbraided

• Materials : Stainless Steel 304



Part #	Description	U/M	Price	Qty/ Box
EFU 228	1/2" FIP x 1" MIP	EA		20
EFU 328	3/4" FIP x 1" MIP	EA		20
EFU 240	1/2" FIP x 1" MIP	EA		20
EFU 340	3/4" FIP x 1" MIP	EA		20
EFU 248	1/2" FIP x 1" MIP	EA		10
EFU348	3/4" FIP x 1" MIP	EA		10
EFU 260	1/2" FIP x 1" MIP	EA		10
EFU 360	3/4" FIP x 1" MIP	EA		10
EFU 272	1/2" FIP x 1" MIP	EA		10
EFU 372	3/4" FIP x 1" MIP	EA		10

Commercial *Flexible Fire Sprinkler Drops*

Unbraided Flexible Hose

Image	Part #	Description	Part #	Description
	EFU 228	1/2"x28" Unbraided Hose	EFU 328	3/4"x28" Unbraided Hose
	EFU 240	1/2"x40" Unbraided Hose	EFU 340	3/4"x40" Unbraided Hose
	EFU 248	1/2"x48" Unbraided Hose	EFU 348	3/4"x48" Unbraided Hose
	EFU 260	1/2"x60" Unbraided Hose	EFU 360	3/4"x60" Unbraided Hose
	EFU 267	1/2"x67" Unbraided Hose	EFU 367	3/4"x67" Unbraided Hose

Braided Flexible Hose

Image	Part #	Description	Part #	Description
	EFB 224	1/2"x24" Braided Hose	EFB 324	3/4"x24" Braided Hose
	EFB 236	1/2"x36" Braided Hose	EFB 336	3/4"x36" Braided Hose
	EFB 248	1/2"x48" Braided Hose	EFB 348	3/4"x48" Braided Hose
	EFB 260	1/2"x60" Braided Hose	EFB 360	3/4"x60" Braided Hose
	EFB 272	1/2"x72" Braided Hose	EFB 372	3/4"x72" Braided Hose

Braided Flexible Hose (High Performance)

Image	Part #	Description	Part #	Description
	EFB 224 HP	1/2"x24" Braided Hose	EFB 324 HP	3/4"x24" Braided Hose
	EFB 236 HP	1/2"x36" Braided Hose	EFB 336 HP	3/4"x36" Braided Hose
	EFB 248 HP	1/2"x48" Braided Hose	EFB 348 HP	3/4"x48" Braided Hose
	EFB 260 HP	1/2"x60" Braided Hose	EFB 360 HP	3/4"x60" Braided Hose
	EFB 272 HP	1/2"x72" Braided Hose	EFB 372 HP	3/4"x72" Braided Hose

Braided Flexible Hose (Ultra Performance)

Image	Part #	Description	Part #	Description
	EFB 224 UP	1/2"x24" Braided Hose	EFB 324 UP	3/4"x24" Braided Hose
	EFB 236 UP	1/2"x36" Braided Hose	EFB 336 UP	3/4"x36" Braided Hose
	EFB 248 UP	1/2"x48" Braided Hose	EFB 348 UP	3/4"x48" Braided Hose
	EFB 260 UP	1/2"x60" Braided Hose	EFB 360 UP	3/4"x60" Braided Hose
	EFB 272 UP	1/2"x72" Braided Hose	EFB 372 UP	3/4"x72" Braided Hose

Commercial Flexible Fire Sprinkler Drops

Parts for Unbraided and Braided Hoses (Standard, High Performance, Ultra Performance)
Reducers and Nipples

Image	Part #	Description
	RDL 12	Reducer 1/2" x 6" TXT (MXF)
	RDL 34	Reducer 3/4" x 6" TXT (MXF)
	LRDS 12 or 34 LRDL 12 or 34	Elbow Reducer Short Elbow Reducer Long

Image	Part #	Description
	RD 127 or 347	7" Reducer
	RD 128 or 348	8" Reducer
	RD 129 or 349	9" Reducer
	NP 1	Nipple 1" x 2-3/8"
	SQ25	25" Stock Bar
	SQ50	50" Stock Bar

Center Brackets, End Brackets, and One Piece Brackets

Image	Part #	Description
	SSB	Snap Clamp Center Bracket For Stock Bar
	OSSB	Open Gate Snap Center Bracket For Stock Bar
	OSSBW	Open Gate Snap Side Wall Bracket For Stock Bar
	OSSBJ	Open Gate Bracket With Mounting Threaded Rod
	TBS	Snap-On T-Bar End Bracket (for recessed or concealed heads)
	HCB	Hat Furring Channel End Bracket

Image	Part #	Description
	MSB	Metal Stud End Bracket
	WSB	Wood Beam Stud End Bracket
	OTBS-PA	Pre-assembled 24" or 48"
	OTBSL-PA	Pre-assembled 24" or 48"
	OGSB-02	Open Gate Snap System Bracket

Image	Part #	Description
	GR	EPDM Gasket

Image	Part #	Description
	PR	NYLON Isolation Ring

A 3D architectural rendering showing a complex industrial ceiling structure. The ceiling is composed of a grid of wooden beams and large, white, curved duct-like components. Several flexible fire sprinkler drops are installed, featuring braided metal hoses and glass-enclosed sprinkler heads. A prominent red diagonal line runs across the scene, highlighting the installation. The background is dark, emphasizing the industrial components.

***Flexible Fire Sprinkler Drops for
Industrial Ducts & Cleanroom
Ceilings***



Flexible Fire Sprinkler Drops for Industrial Ducts / Cleanrooms

Applications

Industrial Ducts

Round or Square Metal Ducts

Cleanrooms

Specially Designed Ceilings

Materials

Tube & Nipples	Stainless Steel 304	
Flange	ABS (Duct)	Stainless Steel 304 (cleanroom)
O-ring	EPDM	No O-Ring

Specifications

Max. Pressure	175 psig	
Max. Temperature.	225°F	
Min. Bend Radius	8"	
K-Factor	1/2" Outlet	5.6

Features

Size	1/2" Outlet, 1" Inlet	
Length	30", 47", 67"	
Type	Braided	

Certification

- FM



Ducts



Cleanroom Ceilings



Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves



Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

Flexible Sprinkler Drops for *Industrial Ducts*

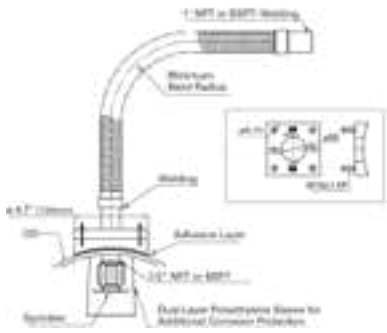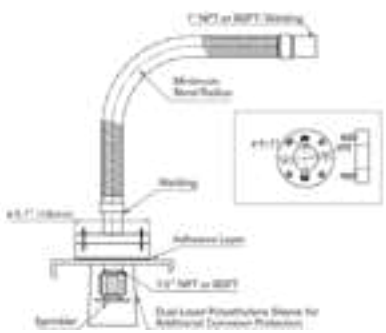 Round Duct Application	 Square Duct Application
Round Duct Application EFDS-01A ~ 03A	Square Duct Application EFDC-01A ~ 03A

- Applicable for round and square ducts
- Pre-installed double layer polybag protects the life of the sprinkler head.


Model Numbers and Friction Loss Data

Model#	Length	Outlet	Max. # of 90° Bend	Equivalent Length of 1" Sch. 40 pipe in ft.
EFDC/ EFDS-01A	30"	1/2"	1	8.7
EFDC/ EFDS-02A	47"	1/2"	3	16.7
EFDC/ EFDS-03A	67"	1/2"	4	22.5

- Data on maximum number of bends was provided as a test parameter by Easyflex and FM used maximum of 4 bends for their tests.

Polybag	Mounting Flange For Square Duct (ABS)	Mounting Flange for Round Duct (ABS)
		
Mounting Flange For Square Duct (STS) 		

Flexible Sprinkler Drops for **Cleanrooms**

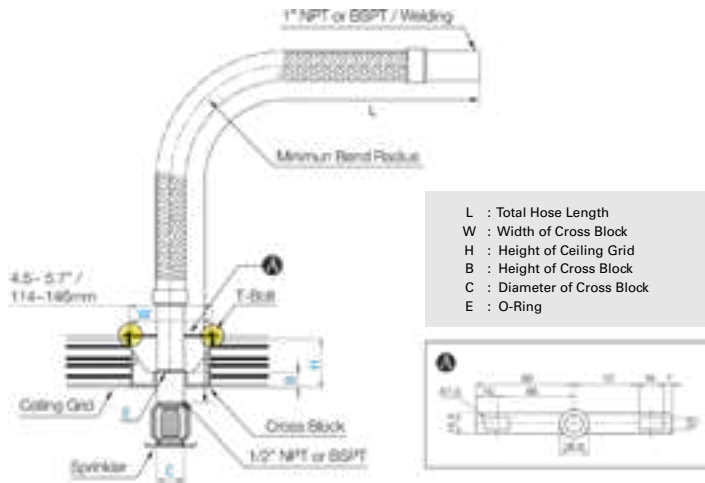

Sprinkler and escutcheon plate are not included

EFSPC-01A ~ 03A

Benefits

- Ready to install out of the box
- Accelerates cleanroom installation and certification
- Allows quick and easy relocations
- Dissipates any vibration even during seismic activities

Model Numbers and Friction Loss Data

Model#	Length	Outlet size	Max.# of 90° Bends	Equivalent Length of 1" Sch. 40 pipe in ft.
EFSPC-01A	30"	1/2"	1	1.6
EFSPC-02A	47"	1/2"	3	9.5
EFSPC-03A	67"	1/2"	4	13.6

- Data on maximum number of bends was provided as a test parameter by Easyflex. FM used a maximum of 4 bends for their test.

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

TERMS AND CONDITIONS

ACCEPTANCE

Buyers expressly agree to terms and conditions when submitting a purchase order.

PAYMENT TERMS

Prices are F.O.B Easyflex distribution center and are subject to change at Easyflex's discretion. Our terms are 1% or 2% discount (as determined by product line) applied with payment within 10 days of receipt of goods and full payment of purchase price and other charges is due within thirty (30) days after invoice date*. Orders must be in box quantity, minimum of \$300. Broken boxes or orders below the minimum amount will incur a \$20 handling fee. If full payment is not received by the applicable due date, Buyer will incur a monthly late charge equal to 1.5% of all outstanding amounts in addition to other related collection or legal fees. Buyer shall be responsible for the payment of all taxes, duties, customs and other fees of any nature imposed to this transaction.

*Terms for qualified credit-approved buyers only.

CREDIT APPROVAL

All orders are subject to approval of Buyer's credit. If Buyer's credit is not approved by Easyflex prior to shipment of the Products, Easyflex may require different terms of payment from those specified in this document, including, but not limited to, requiring first three orders to be C.O.D. or full payment before shipment, requiring Buyer to pay Easyflex C.O.D or to return the products to Easyflex at Buyer's expense.

ORDERS

All orders are subject to acceptance by Easyflex and cannot be cancelled once accepted. No orders can be amended except with Easyflex written approval, and upon terms except Easyflex against any losses including loss of profit on additional costs resulting there from.

DELIVERY

Easyflex shall ship the Products to the location designated by Buyer via commercial carrier or private delivery at the date provide by Buyer in purchase order or earliest available shipment date, by most economical means. Easyflex will notify Buyer of changes or delays in shipping when information becomes available. Changes in the shipping schedule by Buyer may, at Easyflex's discretion, result in an increase in the freight costs.

WARRANTY

All Products sold by Easyflex are warranted to be free from defects in material and workmanship to the extent, in the manner and during the period provided in the applicable express warranty extended to Easyflex by the manufacture of such Products and to the extent Easyflex is able to enforce such manufacturer's warranty. Warranty varies dependent upon product line. Please see product line warranty information for specific information.

TERMS AND CONDITIONS

RETURNS AND CLAIMS

All claims for Products damaged and or lost during shipping must be made within seven (7) days after receipt to Easyflex or, if a common carrier is used, made to the common carrier within their specified claims period. Buyer will report to Easyflex exactly how the Products were damaged and request a Return Authorization Number to return the damaged Products to Easyflex. After Easyflex has inspected the damaged Products, Easyflex may replace the damaged Products at no cost to the Buyer, or issue a credit memo to the Buyer's account, or may disallow Buyer's claim, or may refer claim to the common carrier, if used. When the product is damaged in shipment, the Buyer is responsible for recovering any and all damages from the common carrier.

No returns will be accepted without our Return Authorization Number and there will be a 15% restocking fee. Buyer is responsible for all shipping and freight charges for returning products to Easyflex. In the first fifteen (15) days after a purchase, the Buyer may return the Products for full account credit and or exchange for products of the same price or greater. Buyer must tell Easyflex the specific reason(s) why they want to return the item. Easyflex may, at its discretion, not accept non-damaged Products for credit to the Buyer's account. All non-damaged Product(s) must be in resalable condition. After Easyflex confirms that the non-damaged Products are resalable, Easyflex will credit the Buyer's account.

NON-CONFORMING PRODUCTS

Buyer shall notify Easyflex within writing seven (7) days after delivery of any deficiencies or shortages; otherwise all such claims shall be deemed waived by Buyer. The use or resale by Buyer of any Products claimed to be non-conforming or deficient shall constitute acceptance of such items by Buyer. Buyer shall have no right to withhold payment of the purchase price or to adjust the amount of the purchase price because of such claims; the sole remedy shall be the replacement or repair by Easyflex, at Easyflex's option, of non-conforming or deficient items in accordance with the Disclaimer and Limited Warranty below.

CONFIDENTIALITY

Buyer and its directors, officers, employees and agents shall not disclose to any third party any information pertaining to the goods provided or services performed hereunder, or pertaining to Easyflex's business or operations which obtains or has access to in connection herewith, without the prior written consent of Easyflex.

NO WAIVER OF DEFAULTS

No failure by Easyflex to enforce at any time any of the terms or conditions of this agreement shall constitute a waiver thereof or in any way impair Easyflex's right at any time to avail itself of such remedies as it may have to enforce such terms or conditions. No waiver by Easyflex hereunder will be effective unless in writing and signed by Easyflex.

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

TERMS AND CONDITIONS

RETURNS AND CLAIMS

All claims for Products damaged and or lost during shipping must be made within seven (7) days after receipt to Easyflex or, if a common carrier is used, made to the common carrier within their specified claims period. Buyer will report to Easyflex exactly how the Products were damaged and request a Return Authorization Number to return the damaged Products to Easyflex. After Easyflex has inspected the damaged Products, Easyflex may replace the damaged Products at no cost to the Buyer, or issue a credit memo to the Buyer's account, or may disallow Buyer's claim, or may refer claim to the common carrier, if used. When the product is damaged in shipment, the Buyer is responsible for recovering any and all damages from the common carrier.

No returns will be accepted without our Return Authorization Number and there will be a 15% restocking fee. Buyer is responsible for all shipping and freight charges for returning products to Easyflex. In the first fifteen (15) days after a purchase, the Buyer may return the Products for full account credit and or exchange for products of the same price or greater. Buyer must tell Easyflex the specific reason(s) why they want to return the item. Easyflex may, at its discretion, not accept non-damaged Products for credit to the Buyer's account. All non-damaged Product(s) must be in resalable condition. After Easyflex confirms that the non-damaged Products are resalable, Easyflex will credit the Buyer's account.

NON-CONFORMING PRODUCTS

Buyer shall notify Easyflex within writing seven (7) days after delivery of any deficiencies or shortages; otherwise all such claims shall be deemed waived by Buyer. The use or resale by Buyer of any Products claimed to be non-conforming or deficient shall constitute acceptance of such items by Buyer. Buyer shall have no right to withhold payment of the purchase price or to adjust the amount of the purchase price because of such claims; the sole remedy shall be the replacement or repair by Easyflex, at Easyflex's option, of non-conforming or deficient items in accordance with the Disclaimer and Limited Warranty below.

CONFIDENTIALITY

Buyer and its directors, officers, employees and agents shall not disclose to any third party any information pertaining to the goods provided or services performed hereunder, or pertaining to Easyflex's business or operations which obtains or has access to in connection herewith, without the prior written consent of Easyflex.

NO WAIVER OF DEFAULTS

No failure by Easyflex to enforce at any time any of the terms or conditions of this agreement shall constitute a waiver thereof or in any way impair Easyflex's right at any time to avail itself of such remedies as it may have to enforce such terms or conditions. No waiver by Easyflex hereunder will be effective unless in writing and signed by Easyflex.

TERMS AND CONDITIONS

SEVERABILITY

Any provision of this agreement that is unenforceable in any jurisdiction shall be ineffective to the extent of such unenforceability (but shall be enforced to the maximum extent permissible) without invalidating the remaining provisions hereof.

GOVERNING LAW

This agreement shall be governed by the laws of the state from which the Easyflex corporate office resides (California), without giving effect to its principles of conflicts of law.

FORCE MAJEURE

Easyflex shall not be liable for any breach hereunder, including the failure to deliver or delays in delivery for causes beyond the control of Easyflex or Easyflex's suppliers or subcontractors, including, but not limited to, unavailability or excessive cost of material, strikes, labor slowdowns and stoppages, labor shortages, lockouts, fires, floods, earthquakes, storms, drought, adverse weather, riots, thefts, accidents, embargoes, war (whether or not declared) or other outbreaks of hostility, civil strike, acts of government, acts of God, acts of the public enemy, machinery breakdowns, delay or unavailability of carriers of suppliers, shortages of labor, and government acts or regulation, order or injunctions, or other reasons, whether similar or dissimilar to the forgoing (together a "Force Majeure Event"). In addition, in the event of a Force Majeure Event (i) the time for Easyflex's performance shall be reasonably extended (ii) Easyflex and Buyer shall take reasonable steps to adjust all affected dates in the agreement and (iii) an adjustment in the purchase price may be made for the resulting additional costs to Easyflex upon proof provided to Buyer.

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

LIMITED WARRANTY

Subject to the conditions and limitations in this Limited Warranty, Easyflex warrants to the real owner as installed by qualified installers, sold by Easyflex, under normal conditions of use, gas connectors, water connectors and components will be free from failure caused by manufacturing defects in material and workmanship for the lifetime of the original installation.

**For all gas connectors, this limited warranty will be for two (2) years from the original date of purchase.
For all water connectors, this limited warranty will be for one (1) year from the original date of purchase.
For all no hubs, this limited warranty will be for one (1) year from the original date of purchase.**

Under this warranty, you only have a right to reimbursement if the failure or leak resulted from a manufacturing defect in the products covered by this warranty and occurred during the warranty period. You do not have a remedy or right of reimbursement under this warranty and this warranty does not apply if the failure or any resulting damage is caused by:

- Components other than those manufactured or sold by Easyflex
- Not designing, installing, inspecting or testing the connector in accordance with Easyflex's installation instructions at the time of the installation, applicable code requirements, and good plumbing/ piping/ fitting practices
- Improper handling and protection of the product prior to or during installation, inadequate freeze protection, exposure to pressures or temperatures in excess of the limitations on the tubing or fittings, or application of unauthorized solvents or chemicals
- Acts of nature such as earthquakes, fire, flood, or landslide
- Damage caused by lightning without proper grounding as per NFPA 780, NEC 2005 article 250.70 and clamps complying with UL 467 standards
- Exposure to abnormal environmental conditions relative to the norm for the installation site and outside manufacturer specified pressure and temperature range; including chemical and biological substance exposure
- Freezing during or after the installation or inadequate freeze protection
- Exposure to operating use and or conditions outside those specified by manufacturer

EASYFLEX SHALL NOT BE LIABLE FOR CONSEQUENTIAL ECONOMIC LOSS DAMAGES UNDER ANY LEGAL THEORY AND WHETHER ASSERTED BY DIRECT ACTION, FOR CONTRIBUTION OR INDEMNITY OR OTHERWISE. THE ABOVE LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Other than this limited warranty, Easyflex does not authorize any person or firm to create for it any other obligation or liability in connection with its products.

*Please request and read the full version of Easyflex Warranty explanation for more details.

PURCHASE ORDER

EASYFLEX®

Date

Customer Acct. #

E-mail Address

Bill To

Ship To

Phone

FAX

P.O.#	Payment Terms	Freight Terms	Ship Via	Ship Date	Salesman/ Buyer
		PPD / COL			

Item #	Qty	Part #	Description	Unit Price	Total
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

This order is only subject to approval by Easyflex. Any part or all is subject to cancellation or delay in delivery due to government regulation or contingencies beyond Easyflex's control. All prices subject to change without notice.

Gas
Connectors

MaxTrap

Commercial
Gas
Connectors

Braided
Water
Connectors

Supply Stop
Valves

Water
Heater
Connectors

Thermostatic
Mixing
Valves

Isolation
Valves

Thermal
Expansion
Tanks

No Hub
Couplings

Flexible
Couplings

Flexible
Sprinkler
Drops

COMPARE **BIDETS**

EF-BM-4000



EF-BM-4001



EF-BM-5000



EF-BM-6000



Seat Type	Elongated	Round	Elongated	Elongated
Stainless Steel Nozzle	✓	✓	✓	✓
Adjustable Water Temp & Pressure	✓	✓	✓	✓
Self Cleaning Nozzle	✓	✓	✓	✓
Adjustable Heated Seat	✓	✓	✓	✓
Adjustable Air Dryer	✓	✓	✓	✓
Warm Water	Preheated Reservoir	Preheated Reservoir	Hybrid	Hybrid
Control Panel	Attached	Attached	Attached	Remote
Soft Close Lid	✓	✓	✓	✓
Child Mode	✓	✓	✓	✓
Energy Save Mode	✓	✓	✓	✓
UL Certification	✓	✓	✓	✓
Night Light			✓	✓

FEATURES AND BENEFITS



Self-Cleaning Spray Wand

Barumi bidets can be automatically cleaned with a simple press of a button.



Pulsating and Massaging Water Spray

During the washing cycle, enjoy a pulsating massaging effect.



Adjustable Dryer Temperature

The dryer has 5 adjustable temperature levels for maximum comfort.




Adjustable Water Temp. & Pressure

Water temperature and spray pressure has 5 adjustable levels.



Heated Seat

The heated seat has 5 adjustable temperature levels.



Night Light

The night light will guide you through the dark. (EF-BM-5000 / EF-BM-6000)

ELECTRIC BIDET TOILET SEAT

FEEL CLEAN, STAY FRESH



UPGRADE YOUR LIFE
WITH A BARUMI BIDET

Barumi[®]
BY EASYFLEX



info@barumiusa.com • barumiusa.com