

4-295
Institutional Showerhead
Specification Submittal

Location:



Model Numbers		Feature Highlights
4-295	Showerhead at 30 degree spray angle with mounting bracket and fasteners	 Single mode showerhead at 30 degree spray angle. Adjustable spray pattern. Vandal resistant. Standard flow rate is 2.0 GPM (7.6 L/min).
Options/Modifications		Polished Chrome finish.Solid Brass Construction.
ПА	Anchor plate for use with ceramic tile	
1.5	1.5 (5.7 L/min) Flow rate restrictor	
□В	Through bolt with back plate mounting	Warranty
Note: Append appropriate -suffix to model number.		Limited Lifetime - for residential installations.
Compliance		10 Years - for commercial/industrial

installations.

Refer to www.symmons.com/warran-

ty for complete warranty information.


Architectural/Engineering Specification

Symmons Institutional Showerhead ______ Includes single mode showerhead at 30 degree spray angle, adjustable spray pattern, vandal resistant, standard flow rate is 2.0 GPM (7.6 L/min), Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 GPM compliant. Available options: A = Anchor plate for use with ceramic tile, 1.5 = 1.5 (5.7 L/min) Flow rate restrictor, and B = Through bolt with back plate mounting.

Dimensions

ASME A112.18.1/CSA B125.1

WaterSense 1.5 GPM

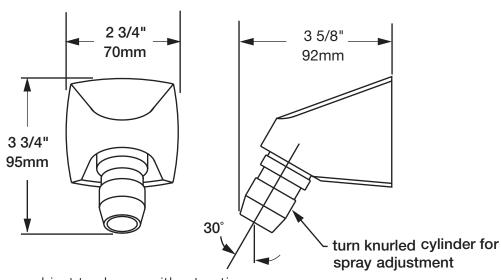

Note: Dimensions subject to change without notice.