


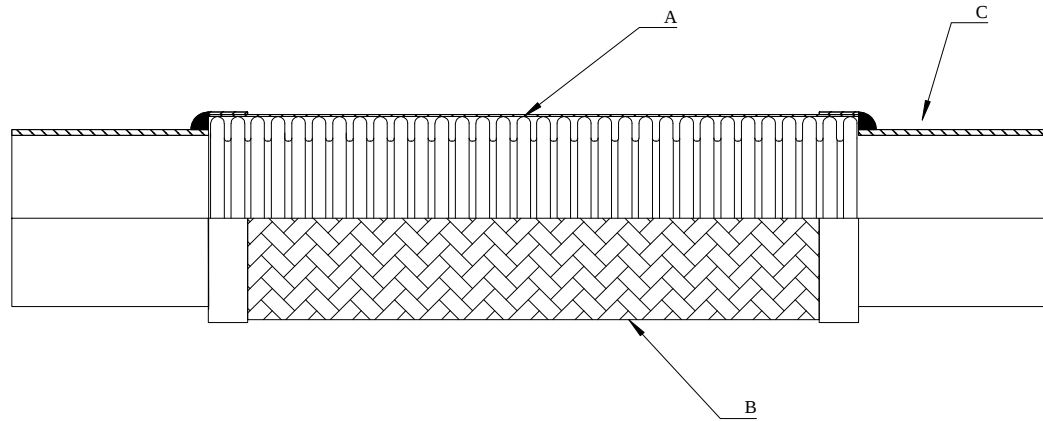

Special Notes:
NSF-61 LEAD FREE COMPLIANT

Design:

A) Tube 316 Stainless Steel
B) Braid 304 Stainless Steel
C) Ends: Copper Sweat Ends

Misc.:

Temp: 450 Degrees F

Axial: 0.0"

Lateral Length depended

This document is the property of Global-Flex Mfg, and can not be distributed without Global-Flex Mfg. authorization

Global-Flex Mfg.

Qty	GFM Part Number	Size Inches	Overall Length	WORKING PRESSURE		Weight
				AT 70F	AT 250F	
	PAC-3SN050SWT-9.0	½	9.0"	1100	1012.00	
	PAC-3SN050SWT-18.0	½	18.0"	1100	1012.00	
	PAC-3SN075SWT-11.5	¾	11.5"	898	826.16	
	PAC-3SN075SWT-18.0	¾	18.0"	898	826.16	
	PAC-3SN100SWT-8.0	1.0	8.0"	718	660.56	
	PAC-3SN100SWT-13.0	1.0	13.0"	718	660.56	
	PAC-3SN125SWT-12.0	1-1/4	12.0"	645	593.40	
	PAC-3SN125SWT-14.0	1-1/4	14.0"	645	593.40	
	PAC-3SN150SWT-17.0	1-1/2	17.0"	531	488.53	
	PAC-3SN200SWT-14.0	2.0	14.0"	449	413.08	
	PAC-3SN200SWT-20.0	2.0	20.0"	449	413.08	
	PAC-3SN250SWT-18.0	2-1/2	18.0"	400	368.00	
	PAC-3SN300SWT-18.0	3.0	18.0"	288	264.96	