


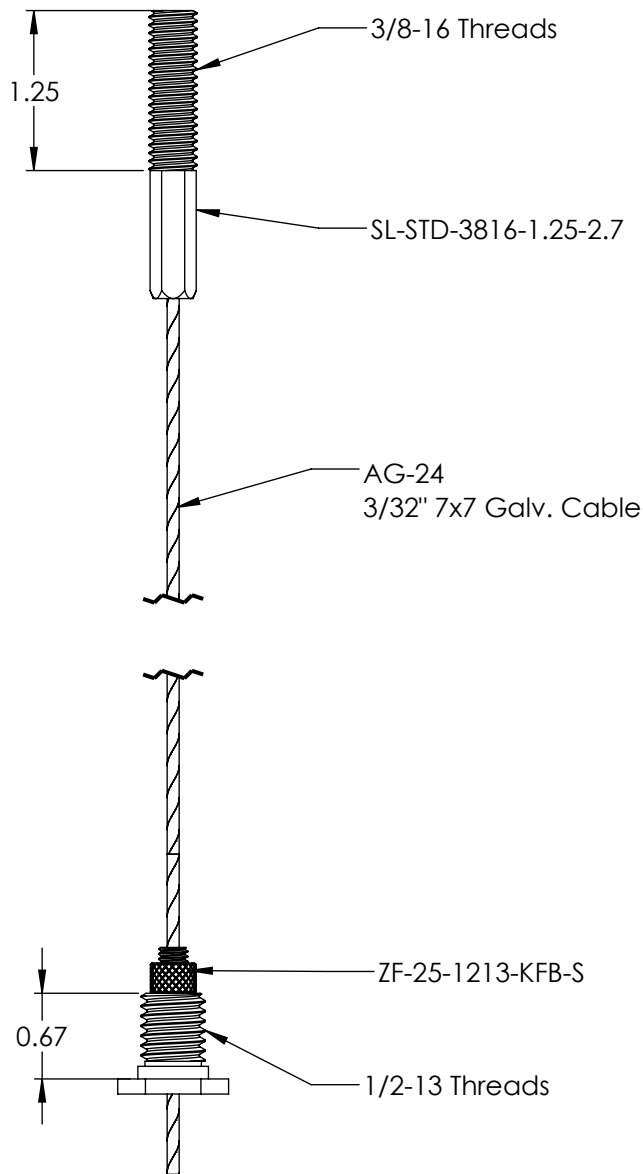

Length ft.	Griplock P/N
5	GH-AG24-3816-ST1-60
10	GH-AG24-3816-ST1-120
15	GH-AG24-3816-ST1-180
20	GH-AG24-3816-ST1-240

Working Load: 100lbs

Unless otherwise specified
 1. Dimensions are in inches
 2. Tolerances are:
 .XX ±.01 .XXX ±.005 Angles 1°
 3. Break all edges .005 min
 4. Finish 63 micro inches
 5. Dimensions apply after finish
 6. Concentricity = .025 TIR

DRAWN BY: NRB REV: INT

CHECKED BY:

PROPRIETARY AND CONFIDENTIAL

This drawing and these specifications are the exclusive property of GRIPLOCK SYSTEMS LLC and shall not be divulged, reproduced, copied, or used as the basis for the manufacture or sale of apparatus without the express written authorization of GRIPLOCK SYSTEMS LLC.

REF: DATE: 4/26/2023

MATERIAL: VARIOUS

SCALE: 1:1.5 FILE: GH-AG24-3816-ST1-xxx

**GRIP
LOCK**
SYSTEMS

GRIPLOCK SYSTEMS

793 Duncan Reidville Rd., Duncan, SC 29334
 Phone (805) 566-0064

GRIPLOCK P/N: GH-AG24-3816-ST1-xxx

DESCRIPTION:

3/32" Strut 1 Grip. Kit w/ 3/8-16 Stud