CLEANOUT PLUG

878 & 879 SERIES

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 878 & 879 Series Cleanout Plug shall be used where necessary in drainage systems. Plug shall be made from glass-fiber reinforced polypropylene material for durability and chemical resistance. Plugs shall have open slots in the top surface to facilitate installation and removal. Designed in accordance with ASTM F1498-08.

MATERIALS

Plug: Glass-fiber reinforced polypropylene.
Thread Insert: Brass (optional)

878-030

INSTALLATION

For use in PVC/ABS or cast iron DWV systems. Use compatible thread sealing compound or PTEF tape. Install into female threads.
Do not overtighten.

DIMENSIONS

A: Nominal size	1½"	2"	3"	4"	5"	6"
B: Plug thickness	11/16"	11/16"	⅞"	⅞"	1"	1"

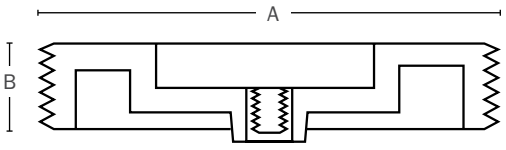

Create Item Number

87A-BC

e.g. 878-30: 3" White polypro cleanout plug with brass thread insert

PLUG COLOR A
- ☑ **8** = White Polypro
- ☐ **9** = Black Polypro

BRASS INSERT B
- ☑ **0** = No brass insert
- ☐ _ = With brass insert

SIZE C
- ☐ **15** = 1½" MIP Thread
- ☐ **20** = 2" MIP Thread
- ☑ **30** = 3" MIP Thread
- ☐ **40** = 4" MIP Thread
- ☐ **50** = 5" MIP Thread*
- ☐ **60** = 6" MIP Thread*

*Only available with brass insert