

THREADED EXTENSION ADAPTER

» 832 SERIES

FinishLine™

| | |
|------------------|-----------------|
| ITEM # SUBMITTED | _____ |
| JOB NAME | _____ |
| LOCATION | _____ |
| ENGINEER | _____ |
| CONTRACTOR | _____ |
| PO# | _____ TAG _____ |


SPECIFICATION

Sioux Chief 832 Series threaded extension adapter shall be used where necessary in drainage systems. Adapter shall be enamel-coated ductile iron and designed to install between the Coring Sleeve and Finish Fixture of FinishLine drains and cleanouts. Adapter shall be stacked when necessary for additional height. Adapters can be used with FinishLine items having either iron or polymer components.

MATERIALS

Enamel-coated ductile iron

INSTALLATION

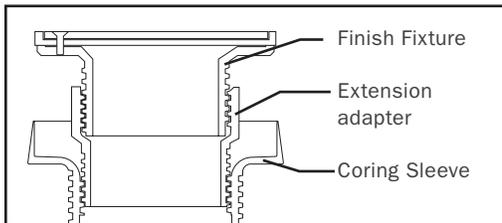


Install adapter into female threads of Coring Sleeve. Install Finish Fixture into female threads of adapter. Adjust to proper height. Apply silicone adhesive to threads if desired.



832-EX3

DIMENSIONS

- A:** Adjustment 2 1/8" min – 3 3/4" max
- B:** Outer diameter 3 7/8" / 4 5/8"
- C:** Height 2 7/8"
- D:** Inner diameter 3" / 4"

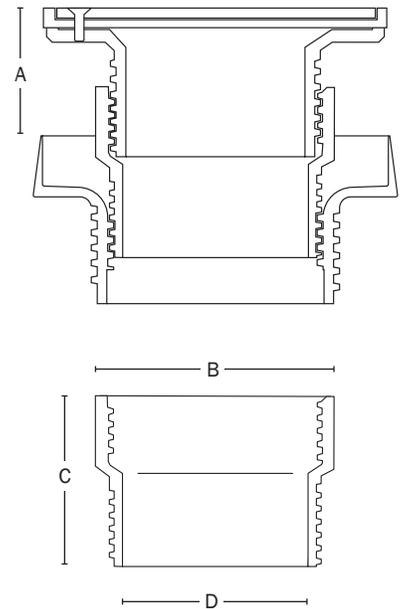

Create Item Number

832-A

e.g. **832-EX3**: Smaller model extension adapter for FinishLine drains/cleanouts

ADAPTER SIZE **A**

- EX3** = Smaller model¹
- EX4** = Larger model²

¹ Designed for heads with 5-1/2" round or 5-7/8" square tops
² Designed for heads with 6-1/2" round or 7" square tops