



Poise® | K-3161

18" undermount single-bowl bar sink

Features

- 21" (533 mm) minimum base cabinet width
- Single bowl
- 9" (229 mm) depth provides generous workspace
- Includes installation hardware, bottom sink rack, and bamboo cutting board



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

 NA Stainless Steel



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-07-2026 11:00 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.



ASME A112.19.3/CSA B45.4

ADA

ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Drain Hole Diameter:	3-5/8" (92 mm)
Minimum Base Cabinet Width:	21" (533 mm)
Basin Configuration:	Single Bowl
Basin Length:	14" (356 mm)
Basin Width:	14" (356 mm)
Basin Depth:	9-3/16" (233 mm)

Material

- Premium 16-gauge stainless steel

Included Combo Skus

- K-3391 18" undermount single-bowl bar sink
- K-3140 Hardwood cutting board for and kitchen and bar sinks
- K-3142 Stainless steel sink rack, 13-3/16" x 13-3/16", for kitchen and bar sinks

Recommended Products/Accessories

- K-23726 Drain treatment
- K-23729 Stainless steel cleaner
- K-8801 Sink drain and strainer with tailpiece
- K-8799 Sink drain and strainer basket, less tailpiece
- K-11352 Disposal flange with stopper

Warranty

See website for detailed warranty information.

KOHLER® Stainless Steel Sinks Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-07-2026 11:00 - US-CA

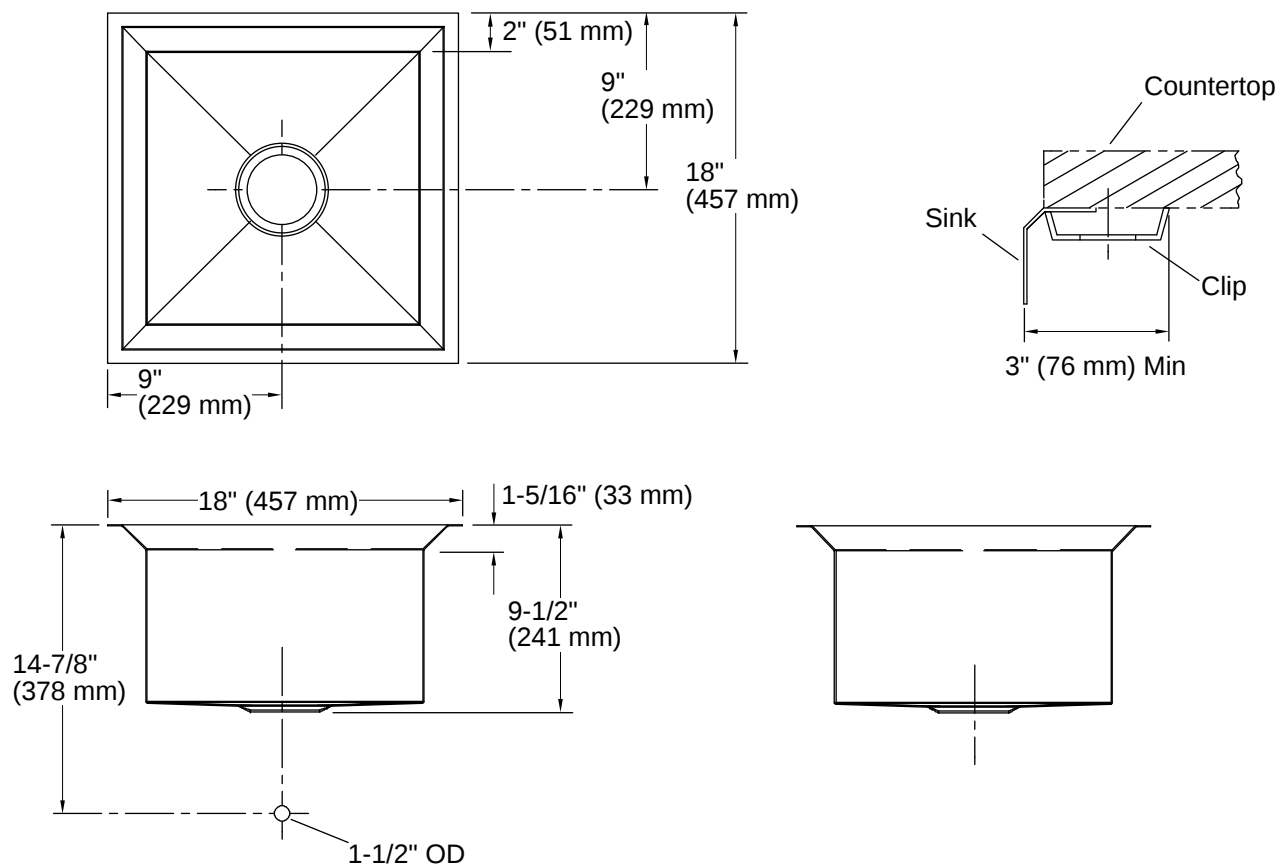

Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Allow a minimum of 3" (76 mm) clearance around the sink rim for clip attachment.

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.

