



Delta Limited
499B (500 MBH Input - 2 Stage Fire)

Tag: **RAYWH3499BNGBRZCNP8**
Project: **P8 Delta Stock**
Quantity: **1**

Unit Information

Model Series: **Delta Limited**
Size: **499B (500 MBH Input - 2 Stage Fire)**
Fuel:
Location: **Outdoor**
Altitude: **0** ft

Heating Performance

Input Temp: **55** F
Output Temp: **140** F
Design Capacity: **0** MBTUH
Input Capacity: **500** MBTUH
Output Capacity: **416** MBTUH
Thermal Efficiency: **83.1** %

Water Flow

Design Flow: gpm
Max Flow: **22** gpm
Min Flow: **90** gpm
Pressure Drop: ft. wg

General Unit Data

Unit Weight: **545** lbs.
Unit Length: **25** in.
Unit Width: **50** in.
Unit Height: **34** in.



Delta Limited



Product Data: Type WH Water Heater

Qty	Description
1	Type WH Water Heater

Tag(s): RAYWH3499BNGBRZCNP8**Selected Options**

Application : Domestic Water Heater
Location : Outdoor
Model Size / Input : 499B (500 MBH Input - 2 Stage Fire)
Fuel Type : Natural Gas
Efficiency : 83.1 %
Water Quality / Pump Selection Criteria : Hard (16 to 25 GPG) / P8 (P11 non-ferrous)
Pump Type : Mounted Pumps
Pump Material : Bronze \ Stainless Steel
Header Material : Bronze
Heat Exchanger Material : A-3 Cupronickel Heat Exchanger
Pressure Relief Valves : A-15 125 PSIG (Standard for Water Heater)
Ignition Module : Standard 3-Try Ignition - Auto Reset
Low Water Cut Off : None
Codes : G-12 California
4 inch Supply Gas Pressure Configuration (G-20) : None
High Limit - Manual Reset : None
High Limit - Combination : I-12 Adjustable Auto Limit / Adjustable Manual Limit - 200/200 F
Low Gas Pressure Switch : None
High Gas Pressure Switch : None
Low Water Pressure Switch : None
Surerack - Unit Stacking Kit : None
Mounting Location : Rear-Mounted
Mounted Pumps : P-8 Bronze Mounted Pump (Hard 16 to 25 GPG)
Cold Water Start Systems : None
Cold Water Run Pumps : None
Injector Pump : None
Flanges : None
Control / Valve : None
Controller (Not Included, See Accessories Section) : None
Elevation : Below 2000 ft (0 – 1999 ft)

Selected Accessories

Delta Limited WH Small Standard Features

Qty: 5 Tags: RAYWH1399BNGBRZCNP8, RAYWH3499BNGBRZCNP8, RAYWH3649BNGBRZCNP8, RAYWH3749BNGBRZCNP8, RAYWH3899BNGBRZCNP8

Standard Features**Heat Exchanger**

- ASME HLW Stamp
- ASME Inspected and Stamped
- 160 PSIG Working Pressure
- National Board Approved
- ASME Steel Tube Sheet
- Silicone High Temp O-Rings
- Temperature and Pressure Gauge

Control

- 120V, 60Hz, 1Ø, Power Supply
- 120/24V 60 Hz transformer
- 100% Shut-Off/Lockout
- Hot Surface Ignition
- Remote flame sensor
- High limit control, manual reset
- On/Off Power Switch
- Manual shut-off, front-mounted switch
- Flow Switch
- Blocked Vent Pressure Switch
- Combustion Air Proving Switch
- Pump Time Delay Relay, 5 Minute, Fixed
- Status Display Lights

Burner

- Ultra-Low NOx: Less than 20 PPM

Gas Train


- Manual Gas Shut-off Valve(s)
- Combination Valves
- Design Certified – ANSI Z21.10.3/CSA 4.3

Construction

- Indoor/outdoor construction
- Enclosed front controls
- CSA Low Lead Certified ($\leq 25\%$ Lead)
- 100% Factory Fire Tested
- Thermal Shock Proof Heat Exchanger
- Limited Twenty-Year Thermal Shock Warranty
- Limited Ten-Year Cupro-Nickel Heat Exchanger Warranty
- Limited Five-Year Copper Heat Exchanger Warranty
- PolyTuf Powder Coated Cabinet
- Combustible Floor Shield Required
- Fan-Assisted
- Patented Burner Security Blanket
- Proudly Assembled in the USA

Delta Limited WH Dimensions 499B

Qty: 1 Tags: RAYWH3499BNGBRZCNP8

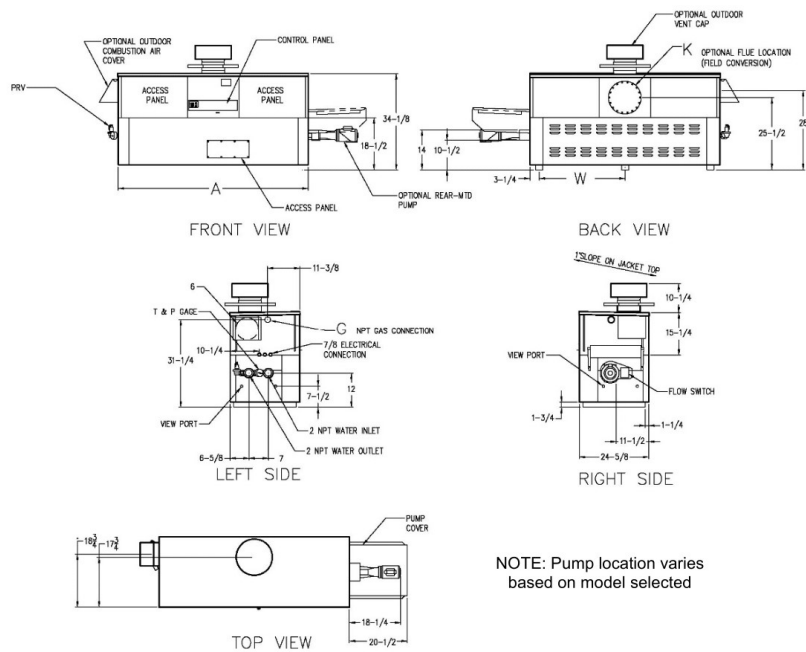

Model	SPECIFICATIONS								Approx. Shipping Wt. (lbs.)
	MBTUH			A Width	G NPT	K	W	Amp. Draw	
	Input	Output 85%	Output 83.1%						
499B	500	425	416	50	1-1/4	6	22	6	545

NOTES: 1. Rates shown are for natural or propane gas, and elevations up to 4,500 feet. For installation above 4,500 feet, please contact manufacturer.
2. Recommended natural gas supply pressure is 7 – 10.5" WC. Recommended propane gas supply pressure is 11 - 13" WC.
3. Amp draw is heater less pump

Model	83.1% System Flow and Head Loss													
	3-4 Grains Per Gallon					5-15 Grains Per Gallon					16-25** Grains Per Gallon			
	ΔT (°F)	GPM	ΔP (FT WC)	MTS (IN)	SHL (FT WC)	ΔT (°F)	GPM	ΔP (FT WC)	MTS (IN)	SHL (FT WC)	ΔT (°F)	GPM	ΔP (FT WC)	SHL (FT WC)
499B	21	40	2.1	2	5.2	16	52	3.5	2	8.6	9	90	10.4	24.2

Model	85% System Flow and Head Loss													
	3-4 Grains Per Gallon					5-15 Grains Per Gallon					16-25** Grains Per Gallon			
	ΔT (°F)	GPM	ΔP (FT WC)	MTS (IN)	SHL (FT WC)	ΔT (°F)	GPM	ΔP (FT WC)	MTS (IN)	SHL (FT WC)	ΔT (°F)	GPM	ΔP (FT WC)	SHL (FT WC)
499B	21	40	2.1	2	5.2	17	52	3.5	2	8.6	10	90	10.4	24.2

SHL includes 50 ft of tubing each way (100 total)
** Must use optional cupro-nickel tubes. For hardness exceeding 25 GPG, must use water softener
Basis for minimum flow is 40 GPM or 30°F ΔT, 90 GPM for maximum flow

Model	83.1 % Recovery Rates								
	20°	30°	40°	50°	60°	70°	80°	90°	100°
499B	2518	1679	1259	1007	839	709	630	560	504

Model	85 % Recovery Rates								
	20°	30°	40°	50°	60°	70°	80°	90°	100°
499B	2576	1717	1288	1030	859	736	644	572	515