



Contemporary | K-13689-G

Round 10" single-function rainhead, 1.75 gpm

Features

- Single-function rainhead
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Optimized sprayface for maximum performance
- 1.75 gpm (6.6 lpm) maximum flow rate



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite
DR	Deep Bronze



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-03-2026 01:47 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate
Shower/Rainhead Rated 1.75 gpm (6.6 l/min)
Maximum Flow:

Material

- Solid-brass construction for durability and reliability

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-7392 12" ceiling-mount single-function rainhead arm and flange

or

- K-7394 6" ceiling-mount single-function rainhead arm and flange

or

- K-7396 3" ceiling-mount single-function rainhead arm and flange

Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



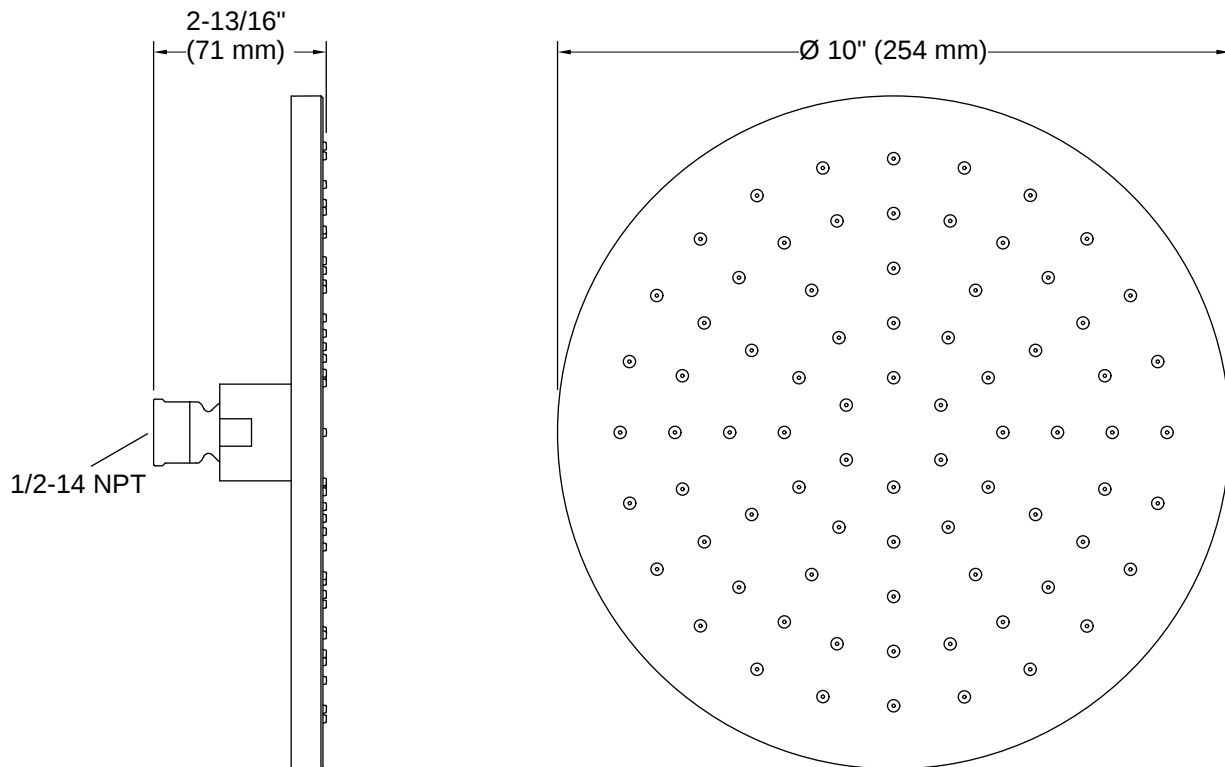

Installation

- 1/2" -14 NPT connection
- Ceiling-mount

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.4 gal/min (5.3 l/min) or less.

