



Coralais® | K-15199-4NDRA

Single-handle centerset bathroom sink faucet with 0.5 gpm vandal-resistant aerator and red/blue indicator, less drain

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows for both volume and temperature control
- Stationary spout
- Metal throat plate
- Flexible connections
- Less drain and lift rod
- Red/blue indexing
- Vandal-resistant aerator
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

■ CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-03-2026 06:50 - US-CA

THE BOLD LOOK
OF **KOHLER**



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 4-3/16" (106 mm)

Drain With Overflow: [object Object]

Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

Valves


Included Valves: Ceramic disc, Thermostatic, Volume Control

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner



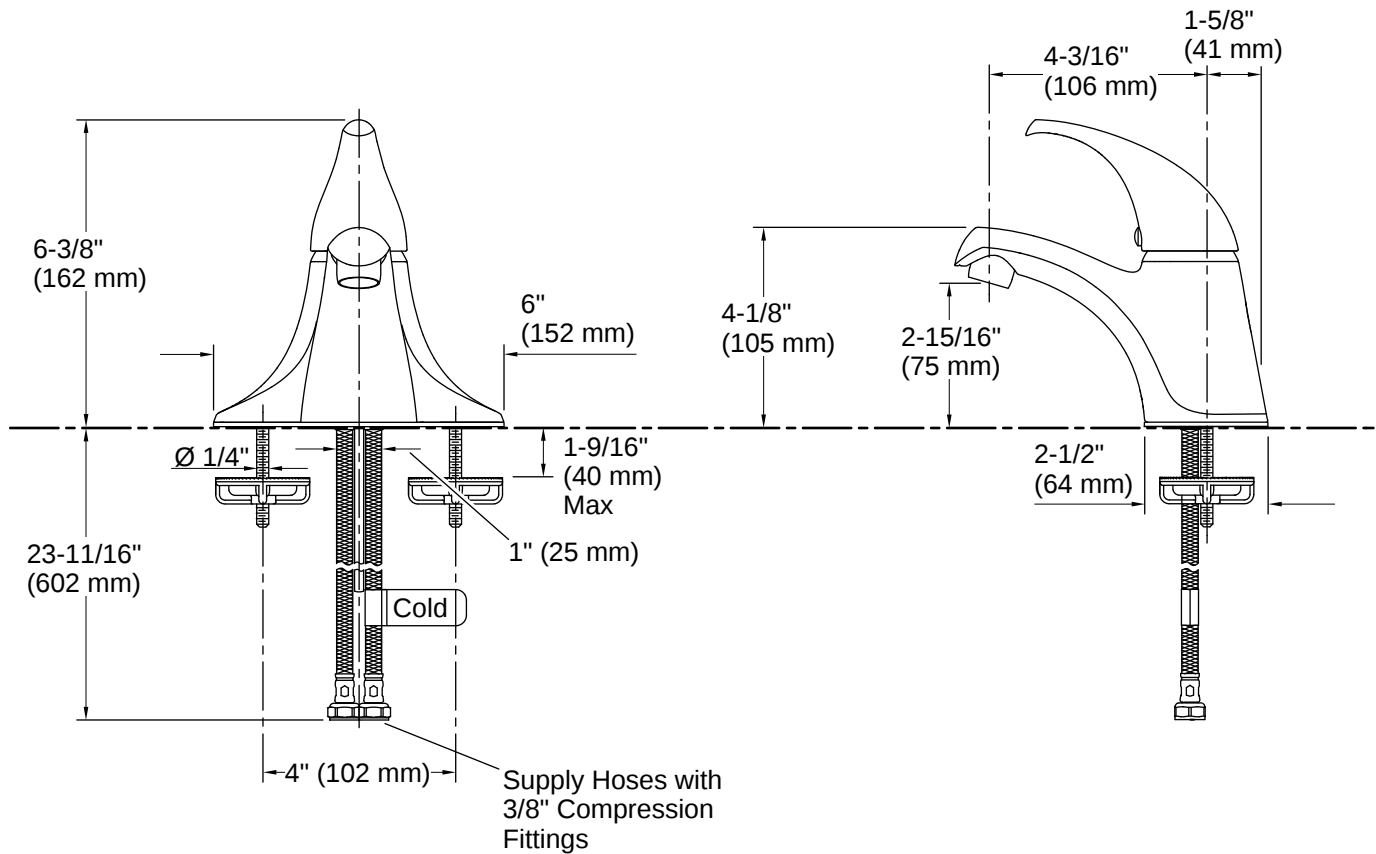

Installation

- For 4" (102 mm) centers

Installation Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

