



Aquifer® | K-22155

Reverse osmosis (RO) water filtration system

Features

- Four-stage filtration system reduces contaminants such as arsenic, fluoride, bacteria, virus, lead, mercury, chlorine, chloramine, select pharmaceuticals, and more
- Reduces over 95% of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) in drinking water
- 1:1 ratio high-recovery reverse osmosis membrane creating less waste water
- Provides up to 27.5 gallons per day, or the equivalent of over 200 16.9-oz. bottles of water (results may vary based on water pressure, temperature and incoming water quality)
- 0.5 gpm (1.9 l/min) maximum flow rate at 60 psi (4.1 bar).
- 3.2 gallon storage tank
- Filter head automatically turns off water supply when cartridge is removed
- Requires Kohler RO-compatible beverage faucet with air gap



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-03-2026 09:47 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

CSA B483.1
NSF Protocol P231
NSF/ANSI 42
NSF/ANSI 58
NSF/ANSI 401
NSF/ANSI 53

Technical Information

All product dimensions are nominal.

Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

Material

- High-impact plastic construction
-

Recommended Products/Accessories


K-22156 Reverse osmosis (RO) replacement membrane
K-22159 Reverse osmosis (RO) replacement filter 3-pack

Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty



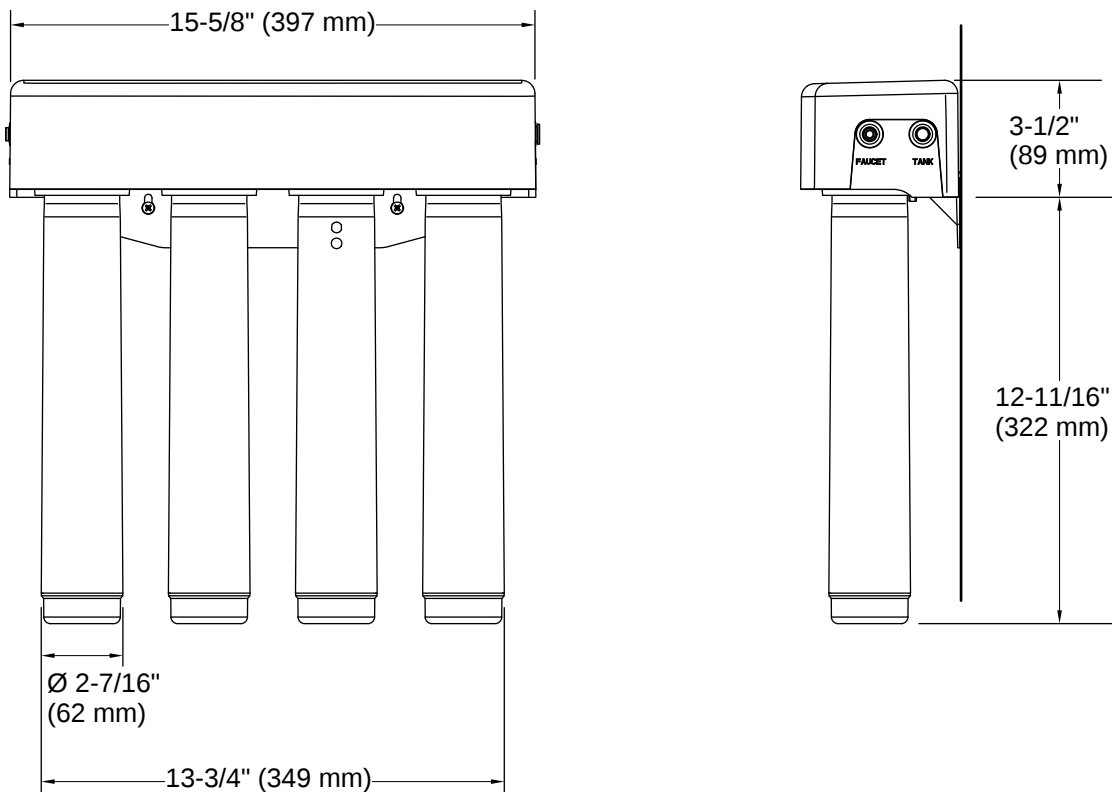

Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement

Installation Notes

Install this product according to the installation instructions.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters: Water

Pressure: 40-100 psi (276-689 kPa) Water Temperature: 40-100°F (4.4-37.8°C) Capacity: 230 gal (871 L)

