



Aquifer® | K-22156

Reverse osmosis (RO) replacement membrane

Features

- Reduces arsenic, fluoride, lead, TDS, bacteria, virus and more in drinking water
- Filter head automatically turns off water supply when cartridge is removed
- Replacing RO membrane every 12 months keeps filtration system performing effectively



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-03-2026 09:47 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

CSA B483.1
NSF Protocol P231
NSF/ANSI 58

Material


- High-impact plastic construction
-

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



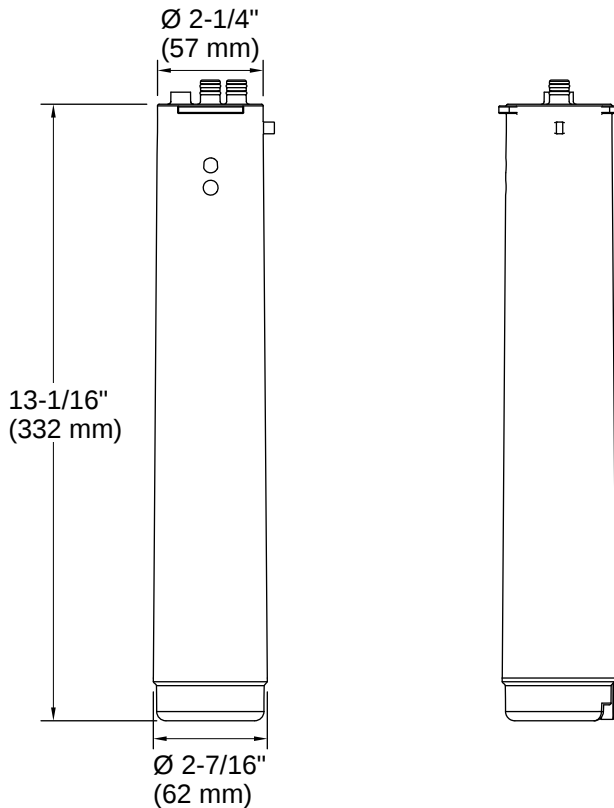

Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement

Installation Notes

Install this product according to the installation instructions.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 12 months.

Application guideline/water supply parameters: Water

Pressure: 40-100 psi (276-689 kPa) Water Temperature: 40-100°F (4.4-37.8°C).

