

KITCHEN SUPPLY OUTLET BOX

696 SERIES

OxBox™

SPECIFICATION

Sioux Chief 696 series supply OxBox™ shall be used where necessary in residential or commercial plumbing supply systems. Access box can be secured directly to vertical stud or between studs using galvanized bracket. Supply line(s) can be installed from above or below. Unit shall be available with plated, 1/4-turn valves. Metal support bracket shall install into top/bottom tracks of box. Outlet connections should generally be provided with a test/tamper-resistant cap. Every unit shall include a debris cover for protection during rough-in.

MATERIALS

Valve body: no-lead brass¹

Valve shank: no-lead brass¹/PPSU/CPVC, 304SS grip ring

Outlet box/frame/arrester clip: ABS

Arrester body: stainless steel, C69300 NL brass¹

Arrester piston: GFPP with EPDM o-rings

Bracket: galvanized steel

CERTIFICATIONS/APPROVALS

NSF-372 compliant, IAPMO listed box and valves

Valves meet ASME A112.18.1, ASSE 1010 Arresters

VALVE/ARRESTER WORKING LIMITS

Max working temperature: 200°F

Max air/water testing & working pressure: 150 PSIG

DIMENSIONS

A: Frame width*	5¾"
B: Frame height*	7¼"
C: Frame opening width	3⅝"
D: Frame opening height	5⅞"
E: Rough-in box width	4"
F: Rough-in box depth	3½"
G: Rough-in box height	5½"
H: Supply connections	½" nominal, 2" O.C.
I: Outlet connections	¼", ⅜" compression
J: Bracket length	18"

*Frame sold separately: 696-1F


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



696-G3011WR



696-G4021WR

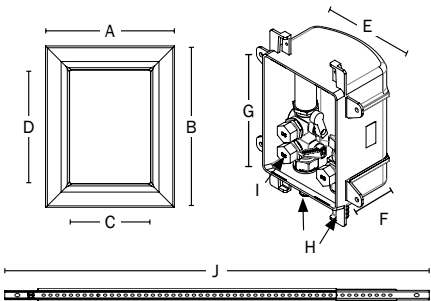

Create Item Number

696-GABCD

e.g. 696-G4024WR: Kitchen supply outlet box with TWO ¾" Hot Outlets, Hot-Side Arrester - ONE ¾" Cold Outlet and ONE ¼" Cold Outlet, Cold-Side Arrester - F1960 PEX connection

SUPPLY OUTLET NUMBER A

30 = 3 outlets

40 = 4 outlets

ARRESTER B

1 = Single arrester - for HOT side

2 = Dual arresters - for HOT/COLD side

SUPPLY OUTLET SIZE C

1 = All (3 or 4) outlets ¾" comp.

4 = ¾" outlets with one ¼" outlet*

SUPPLY CONNECTION D

CR = ½" Male CPVC

MR = ½" MIP/F.SWT

PR = ½" Male sweat/press/push

VR = ½" Viega® PureFlow® PEX

WR = ½" PEX F1960 Grip™

XR = ½" PEX F1807/F2159 Crimp™

Available Separately:

696-1F: Frame only

697-1F: Stainless steel frame only

696-SC1: Frame insert w/hose knockout

696-EX: Frame extension

¹C69300 material is DZR and SCC resistant, compliant with NSF-61 & 372, and compliant with California No Lead Plumbing Law

*¼" outlet is on cold side