



# Aquifer®+ | K-29638

Two-stage water filtration system

## Features

- Two-stage filtration system reduces contaminants such as bacteria, virus, lead, mercury, chlorine, chloramine, select pharmaceuticals, and more
- Reduces over 95% of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) in drinking water
- Two-cartridge system includes coconut shell-based carbon filter and hollow fiber membrane filter
- Hollow fiber membrane technology reduces bacteria and virus in the water
- 0.85 gpm maximum flow rate at 60 psi
- Provides the equivalent of over 2,900 standard 16.9-oz bottles of water
- Filter head automatically turns off water supply when cartridge is removed
- Includes K-77687 carbon block VOC and K-29639 hollow fiber membrane single replacement filter cartridges
- Recommended for use with KOHLER® beverage faucets



## Available Colors/Finishes

*Color tiles intended for reference only.*

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-03-2026 10:05 - US-CA

THE BOLD LOOK  
OF **KOHLER**

---

## Codes/Standards

CSA B483.1  
NSF Protocol P231  
NSF/ANSI 42  
NSF Protocol P473  
NSF/ANSI 401  
NSF/ANSI 53  
NSF/ANSI 42|NSF/ANSI 53|NSF/ANSI 401|NSF Protocol  
P231|NSF Protocol P473

---

## Technical Information

*All product dimensions are nominal.*

Flow Rate  
Faucet Flow Rate: 0.85 gpm (3.2 l/min)

---

## Material

- High-impact plastic construction
- 

## Recommended Products/Accessories

K-29651 Replacement filter cartridge two-pack with hollow  
fiber membrane and carbon block VOC  
K-26369 Beverage faucet


---

## Warranty

*See website for detailed warranty information.*

KOHLER® Water Filter Systems Five-Year Limited Warranty



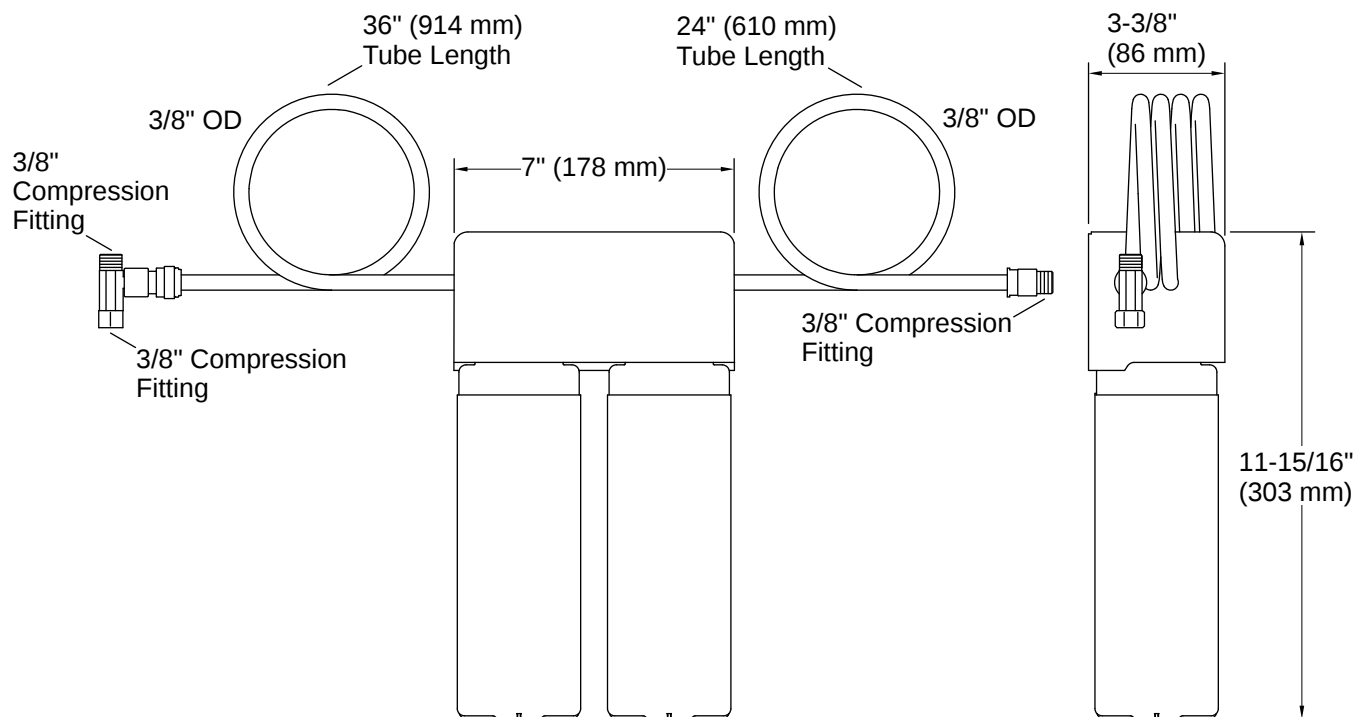

## Installation

- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement
- For cold water use only

## Installation Notes

*Install this product according to the installation instructions.*

To prevent the risk of property damage, protect from freezing.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters: Water Pressure: 40-120 psi (276-827 kPa) Water Temperature: 33-100°F (0.5-37.8°C) Capacity: 389 gal (1,472 L)

