



Steward® | K-4917

Half-stall waterless urinal

Features

- Waterless urinal
- 14-3/4" (375 mm) extended lip
- Cartridge-free integral trapway provides enhanced performance and less maintenance
- Optimized interior design virtually eliminates splashing
- Saves up to 40,000 gallons of water per fixture per year and significantly reduces sewage and maintenance costs
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System
- Touch-free design is vandal resistant and offers added hygiene to users



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| G9 | Sandbar |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-06-2026 23:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.19.2/CSA B45.1

ASME A112.19.19

ADA

ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Spud Size: Outlet, Rear

Trapway Type: Concealed

Material

- Vitreous china

Recommended Products/Accessories

1048656 Sealing liquid (1 Gallon)

1174866 3-Pack Waterless Urinal Cleaner

K-4929 Waterless urinal maintenance balls

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-06-2026 23:00 - US-CA

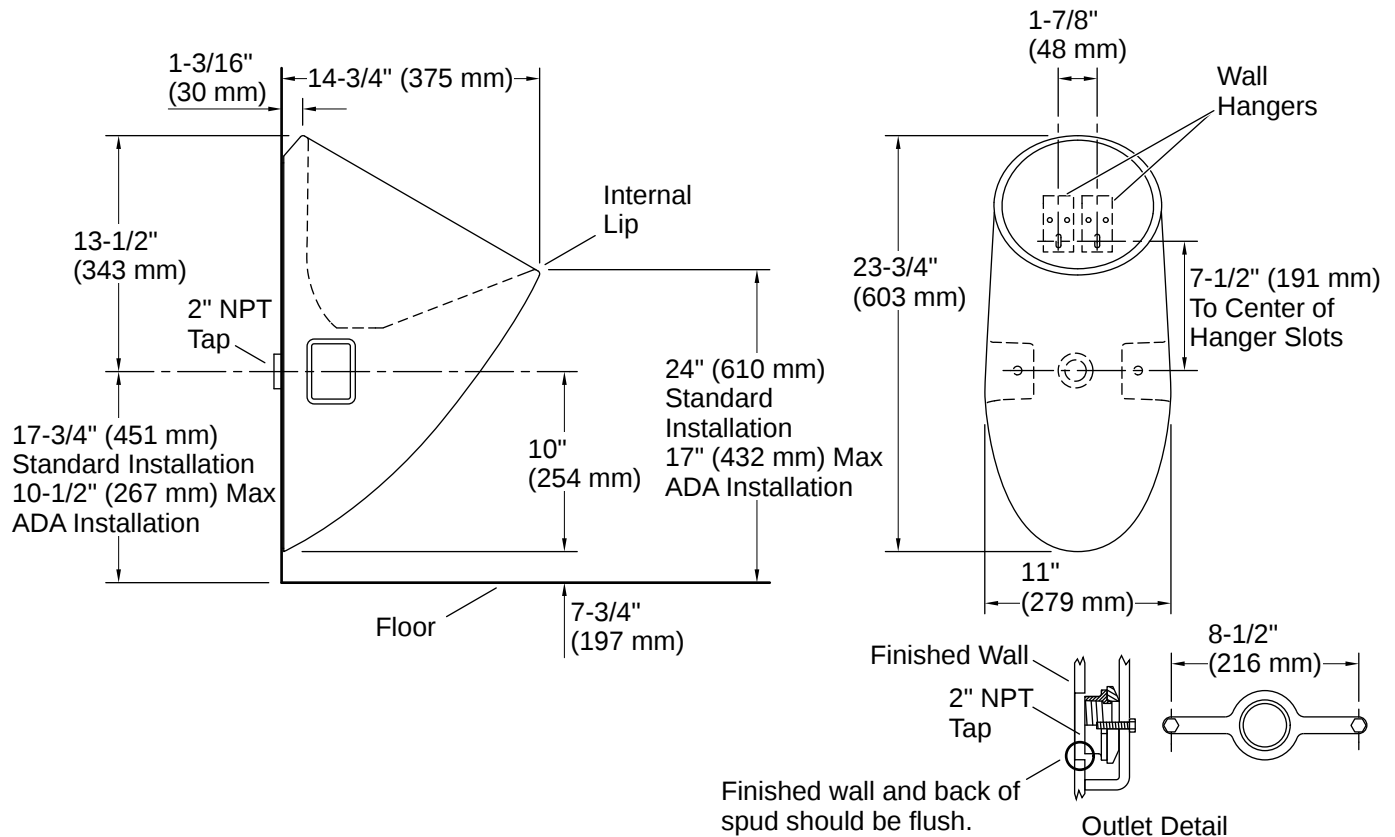

Installation Notes

Install this product according to the installation instructions.

CAUTION: Risk of property damage. When connecting waterless urinals to the building drain waste vent system, do not use copper pipe or copper tube connectors. The use of a copper connector will result in corrosion of the connector and potential building structure damage caused by leakage. Roughing-in remains the same when using the optional 3" outlet spud.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-06-2026 23:00 - US-CA