



Steward® | K-5244-ER

Washout half-stall 0.125 gpf urinal, rear spud

Features

- Revolutionary funnel design virtually eliminates splashback
- KOHLER-engineered water flushing spreader successfully rinses the inverted back wall, sides, and front of the urinal basin for a more sanitary customer experience
- Ultra-low consumption. Operates at 0.125 gpf (0.47 lpf)
- 1/2" (12.7 mm) flexible rear supply hose
- Includes removable strainer, 2" outlet spud, universal mounting bracket, and hangers
- Offers 80% water savings compared to standard 1.0-gpf urinals
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|---|-------------|
| 0 | White |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-03-2026 03:45 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.



ADA

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Spud Size:	Inlet, Rear
Spud Size:	Outlet, Rear
Trapway Type:	Concealed
Flush Rate:	0.125 gpf (0.5 lpf)

Designed for the above water use when installed with a water-saving flushometer.

Material


- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-4929 Waterless urinal maintenance balls



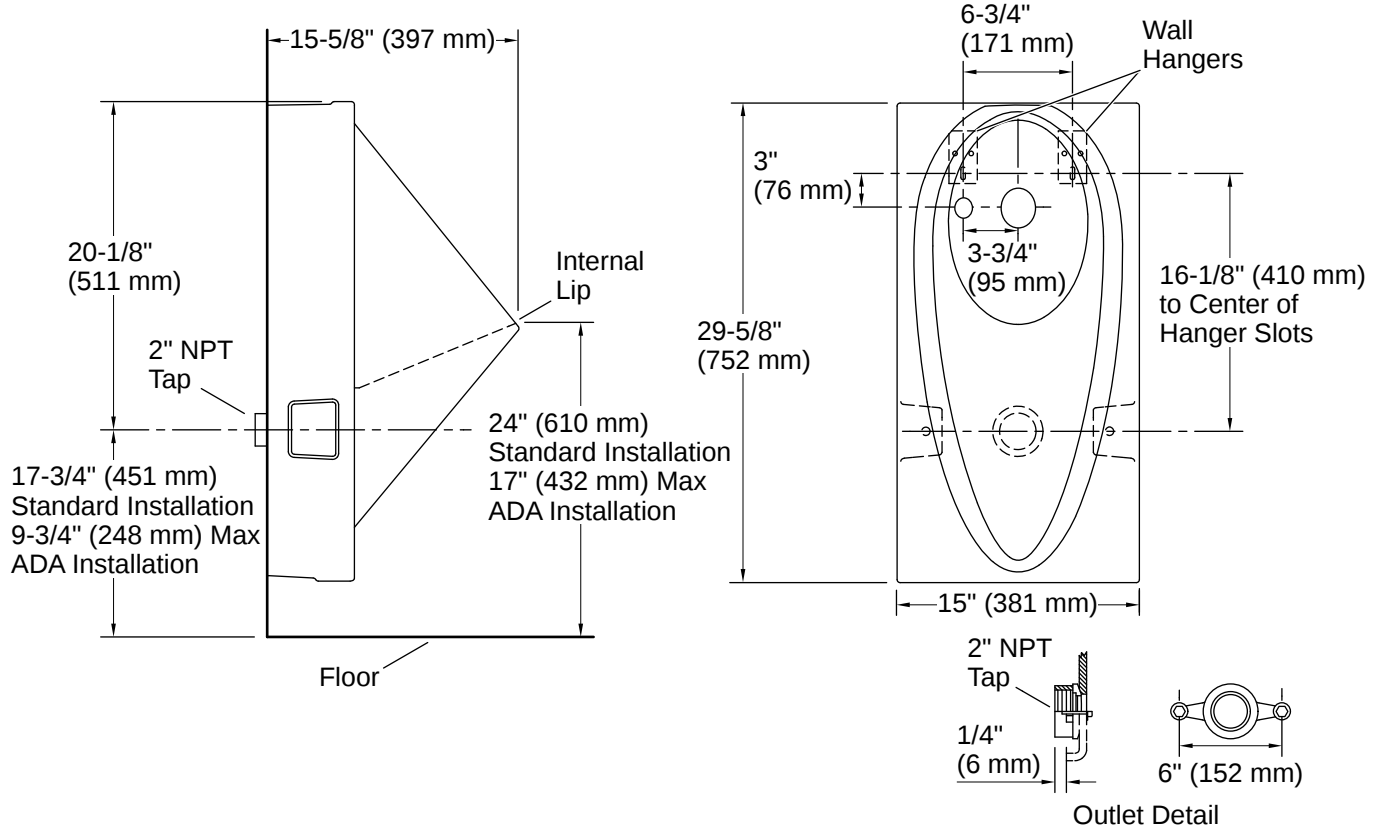

Installation

- Large footprint covers old urinal wall print

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-03-2026 03:45 - US-CA