





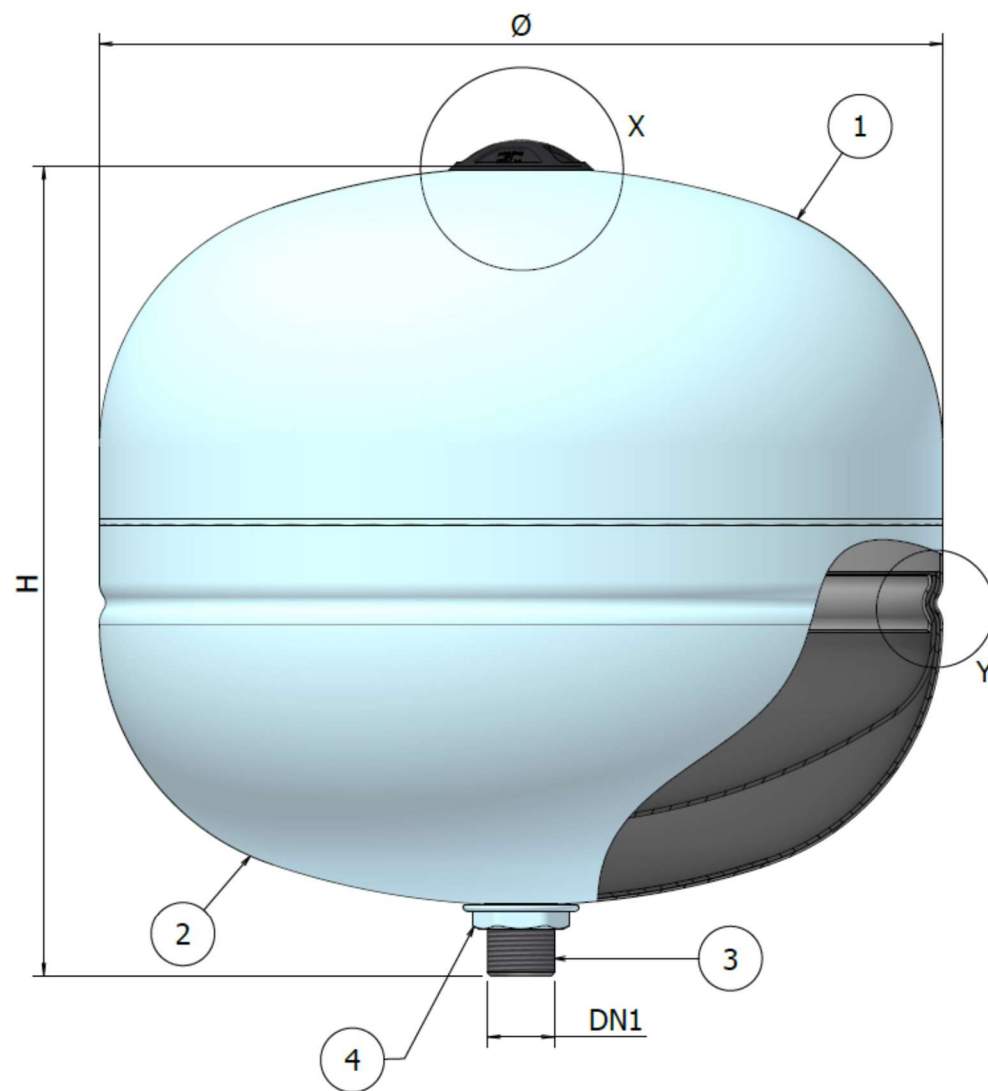


DETT. "X"

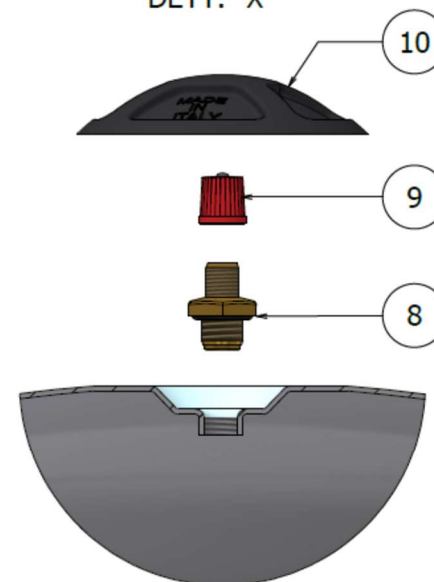

DETT. "Y"

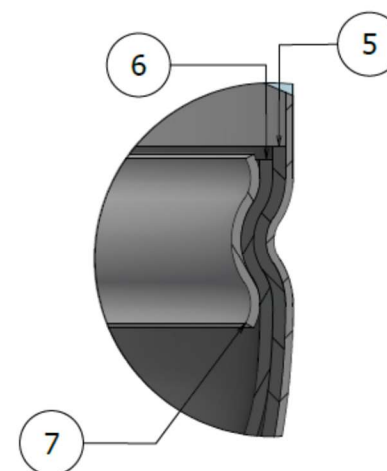

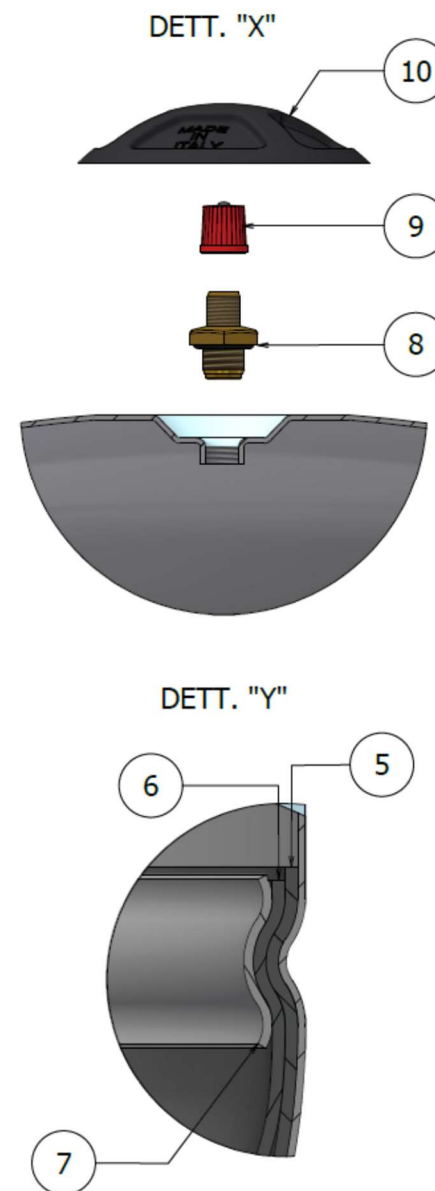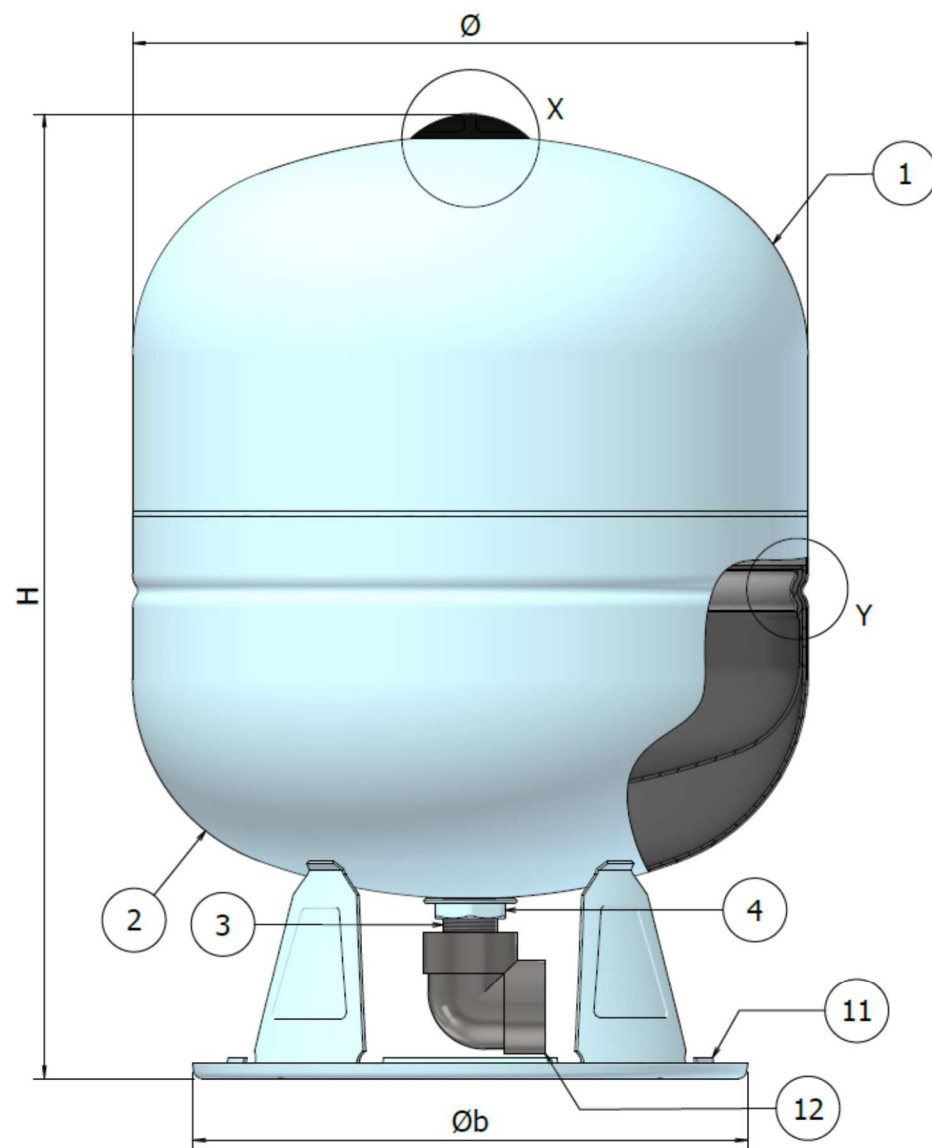

Ratings data sheet

		Type		
Pos.	Description	12-T-009	12-T014	12-T020
	Capacity (gal)	9	14	19
Cod.	Code	A2C2L31 T7516	A2C2L34 T7516	A2C2L37 T7516
∅	Diameter (in)	15 3/4"	15 3/4"	15 3/4"
H	Height (in)	15 3/4"	22 1/4"	32 1/4"
∅b	Support diameter (in)	//	13"	13"
DN1	Water connection	1" male NPT	1" female NPT	1" female NPT

-	Max. working pressure PS (psi)	150
-	Hydrostatic test pressure PT (psi)	210
-	Precharge pressure (psi)	36
-	Min. / Max .working temperature T (°F)	+14 / +210

Parts lists

Pos.	Description	Material	Quantity	Spare parts
1	Top head	Carbon steel	1	-
2	Bottom head	Carbon steel	1	-
3	Water connection	Type 304 stainless steel	1	-
4	Flanged hex nut	Galvanized steel	1	-
5	Protective sheath	BUTYL rubber	1	-
6	Bladder	BUTYL rubber	1	-
7	Bladder fixing ring	Carbon steel	1	-
8	Precharge air valve	Brass	1	1
9	Valve cap with gasket	Nylon / NBR	1	1
10	Air valve protection	ABS	1	1
11	Support – on 14-20 gal tanks only	Carbon steel	1	-
12	Elbow– on 14-20 gal tanks only	Type 304 stainless steel 1" NPT female thread	1	-

Notes:

1. Tank surface treatment: Epoxy (cold white color)