

PROJECT:	_____	UNIT TAG:	_____	QUANTITY:	_____
	_____	TYPE OF SERVICE:	_____		_____
REPRESENTATIVE:	_____	SUBMITTED BY:	_____	DATE:	_____
ENGINEER:	_____	APPROVED BY:	_____	DATE:	_____
CONTRACTOR:	_____	ORDER NO.:	_____	DATE:	_____




GRUNDFOS GO MI301

Grundfos remote controls used for installation, data monitoring, fault information and configuration of Grundfos pumps and systems, by radio or IR connections.

Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Maximum ambient temperature: 158 °F	Enclosure class: IP40
Head: _____	Product number: 98046408	
Efficiency: _____		
Liquid: _____		
Temperature: _____		
NPSH required: _____		
Viscosity: _____		
Specific Gravity: _____		

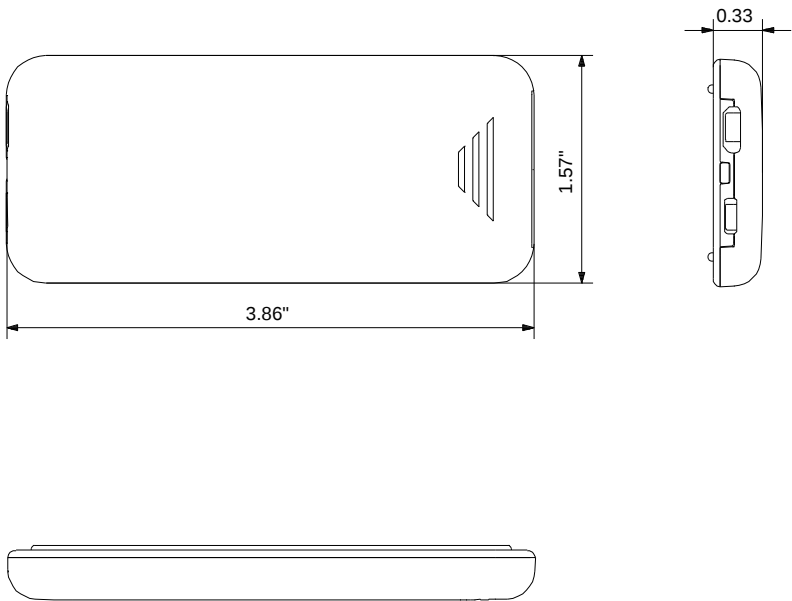

Tender Text



Product photo could vary from the actual product

Product No.: [98046408](#)

GRUNDFOS GO MI301

The Grundfos GO Remote is used to establish wireless connection to a Grundfos product, using a standard Android or iOS platform, with the Grundfos GO Remote App installed. The App is available from Apple App Store and Google Play free of charge.

The MI 301 is a module with built-in infrared and radio communication. It must be used in conjunction with an Android or iOS-based Smartphone with Bluetooth connection. The MI 301 module has rechargeable Li-ion battery and must be charged separately.

The pump/system can be monitored and controlled from the Grundfos GO, and it will be possible to create pdf reports. The specific functions available depend on each individual product.

Supplied with the product

- Grundfos MI 301
Battery charger
Quickguide

Installation:

Range of ambient temperature: -4 .. 158 °F

Relative humidity: 95 %


Electrical data:

Maximum current consumption: 0.03 A




Enclosure class (IEC 34-5): IP40

Position	Count	Description
	1	GRUNDFOS GO MI301  Product photo could vary from the actual product Product No.: 98046408 The Grundfos GO Remote is used to establish wireless connection to a Grundfos product, using a standard Android or iOS platform, with the Grundfos GO Remote App installed. The App is available from Apple App Store and Google Play free of charge. The MI 301 is a module with built-in infrared and radio communication. It must be used in conjunction with an Android or iOS-based Smartphone with Bluetooth connection. The MI 301 module has rechargeable Li-ion battery and must be charged separately. The pump/system can be monitored and controlled from the Grundfos GO, and it will be possible to create pdf reports. The specific functions available depend on each individual product. Supplied with the product - Grundfos MI 301 - Battery charger - Quickguide Installation: Range of ambient temperature: -4 .. 158 °F Relative humidity: 95 % Electrical data: Maximum current consumption: 0.03 A Enclosure class (IEC 34-5): IP40

Description	Value
General information:	
Product name:	GRUNDFOS GO MI301
Product No.:	98046408
EAN:	5710628055591
Installation:	
Range of ambient temperature:	-4 .. 158 °F
Relative humidity:	95 %
Operating temp.:	14 °F
	122 °F
Electrical data:	
Voltage supply:	Li-ion battery 3.7 V, 560 mAh, 2.1 Wh
Maximum current consumption:	0.03 A
Enclosure class (IEC 34-5):	IP40

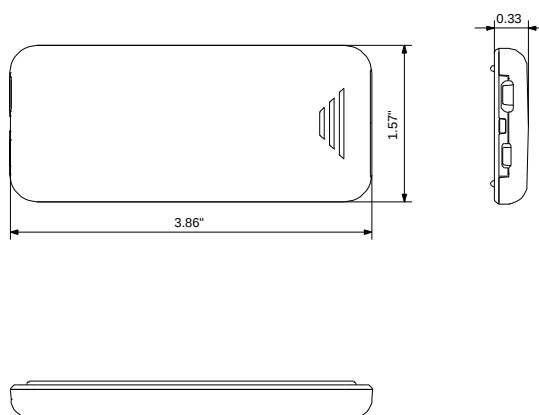

98046408 GRUNDFOS GO MI301 50 Hz

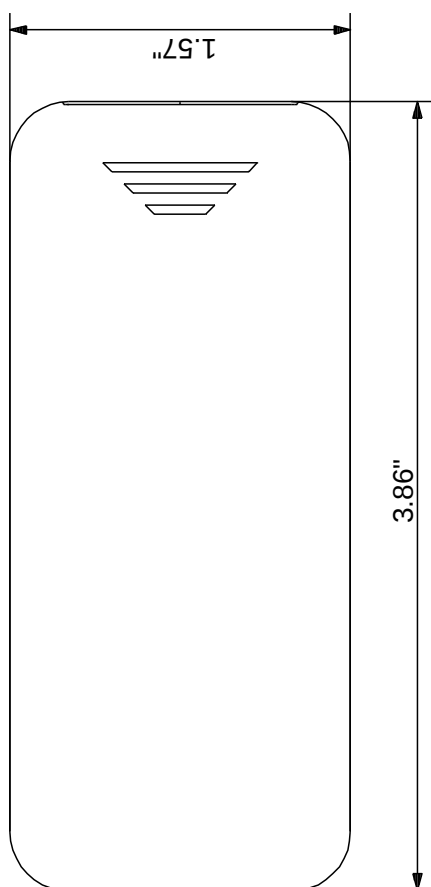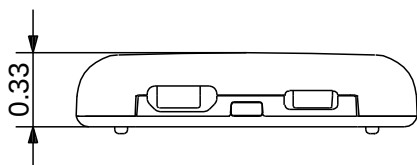

Note! All units are in [mm] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.



Company name:

Created by:

Phone:

Date:

2/21/2018

Order Data:

Product name: GRUNDFOS GO MI301

Amount: 1

Product No.: 98046408

Total: Price on request
