



model SP154DPDT

Flow Switch

FEATURES & BENEFITS

CONSTRUCTION

Solid brass body construction, explosion proof electrical box, and wire push-in connection terminals.

OPTIONS

For more information, visit www.hawsc.com or call (888) 640-4297.



SPECIFICATIONS

Model SP154DPDT is a flow switch for use with the 9001 and 9001EXP alarms. Switch will activate at 2.4 gallons (9 L) per minute of flow. AC, 125/250 volts, 5 amps, double pole, double throw. 1-1/4" NPT inlet and outlet. Class 1, Division 1, Group B, C, D. UL Listed.

APPLICATIONS

Model SP154DPDT flow switch is suitable for a number of emergency applications where water flow detection is needed to alert the appropriate entities of a possible serious situation.

NOTE:

DASHED LINES DENOTE FIELD PIPING (NOT SUPPLIED).

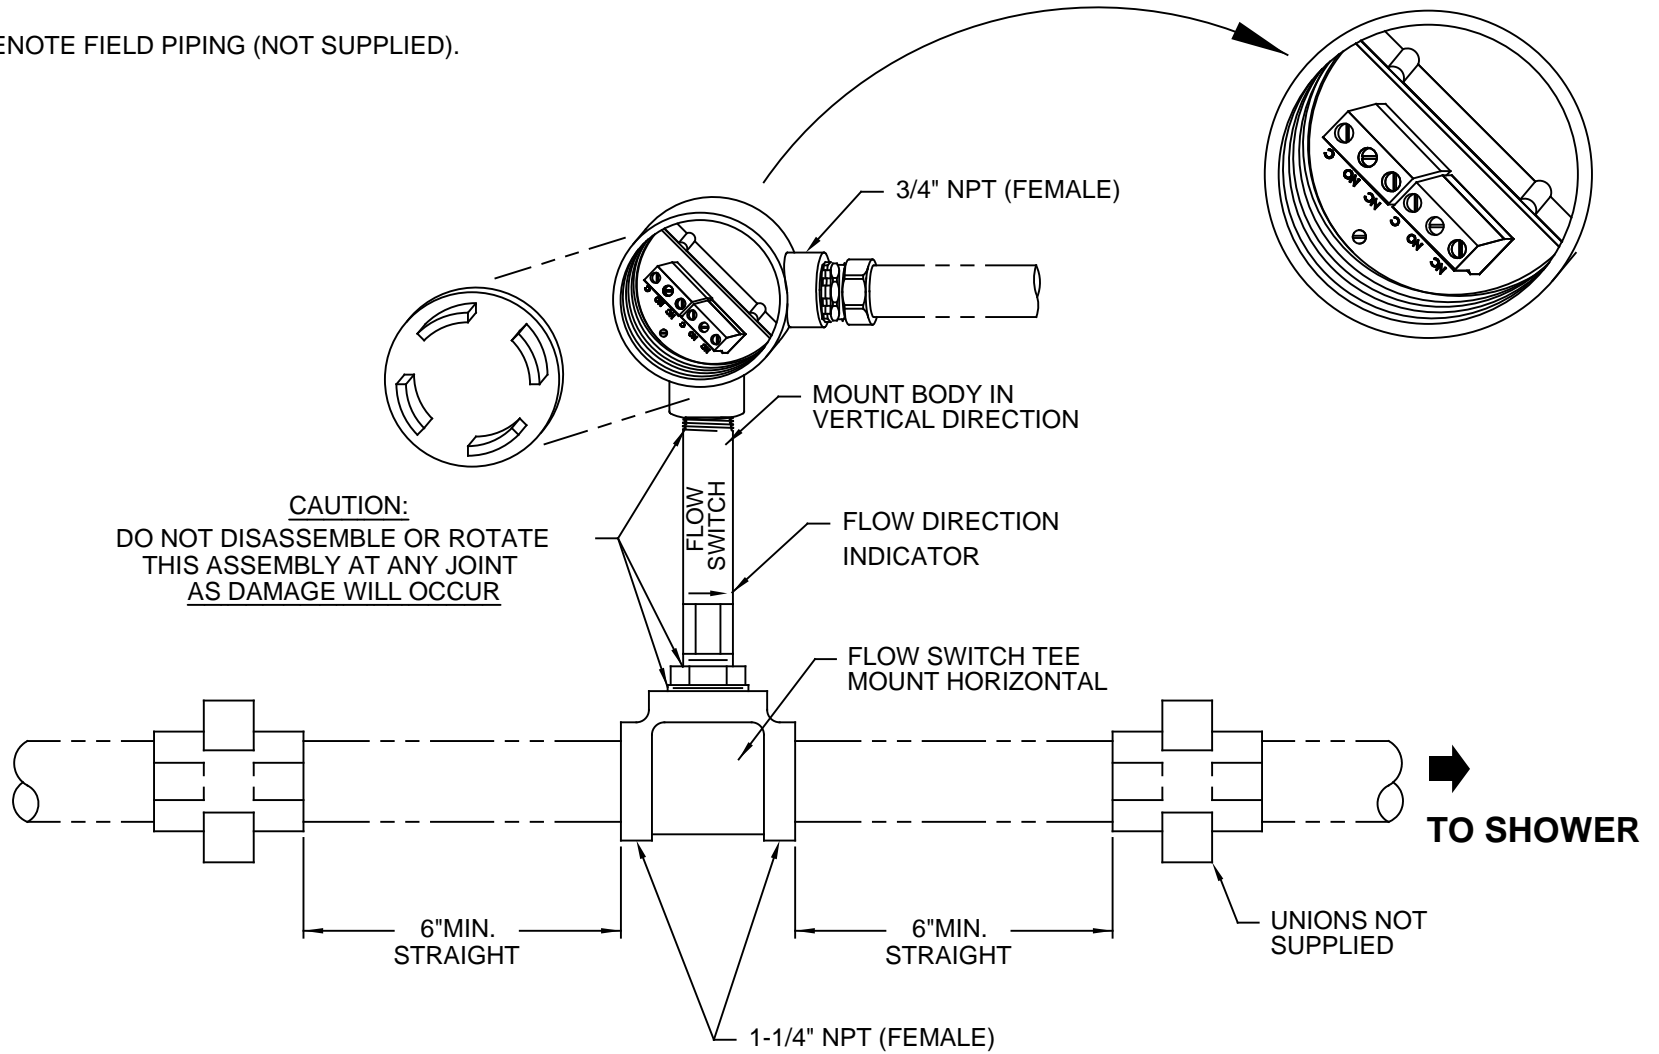



FIGURE 1

 Haws [®]		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
		ECN NO. REVISED PER BY: ECN: 5198 JP	MODEL(S) SP154DPDT
DRAWN: D. OLLOM	DATE: 3/06/97	CHKD.: CC	REVISION 4
APPROVED: FV	DATE: 05/26/17	SCALE: 1:1	DRAWING TYPE: INSTALLATION
		SIZE: A	SHEET 1 OF 1