


PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____

UP 15-35 SU 7P

UP B is a circulator pump with a bronze pump housing for drinking water applications, while Grundfos UP N has stainless-steel pump housing. Both variants are recommended for underfloor heating systems.

Note! Product picture may differ from actual product

Conditions of Service		Pump Data		Motor Data	
Efficiency:	%	Liquid temperature range:	2 .. 74 °C	Max. power input:	114 W
Liquid:	Water	Maximum ambient temperature:	40 °C	Mains frequency:	60 Hz
Temperature:	60 °C	Type of connection:	.NPT	Thermal protection:	IMP.
NPSH required:	ft	Pipe connection:	1 1/4" NPSM		
Specific Gravity:	0.985	Product number:	On request		

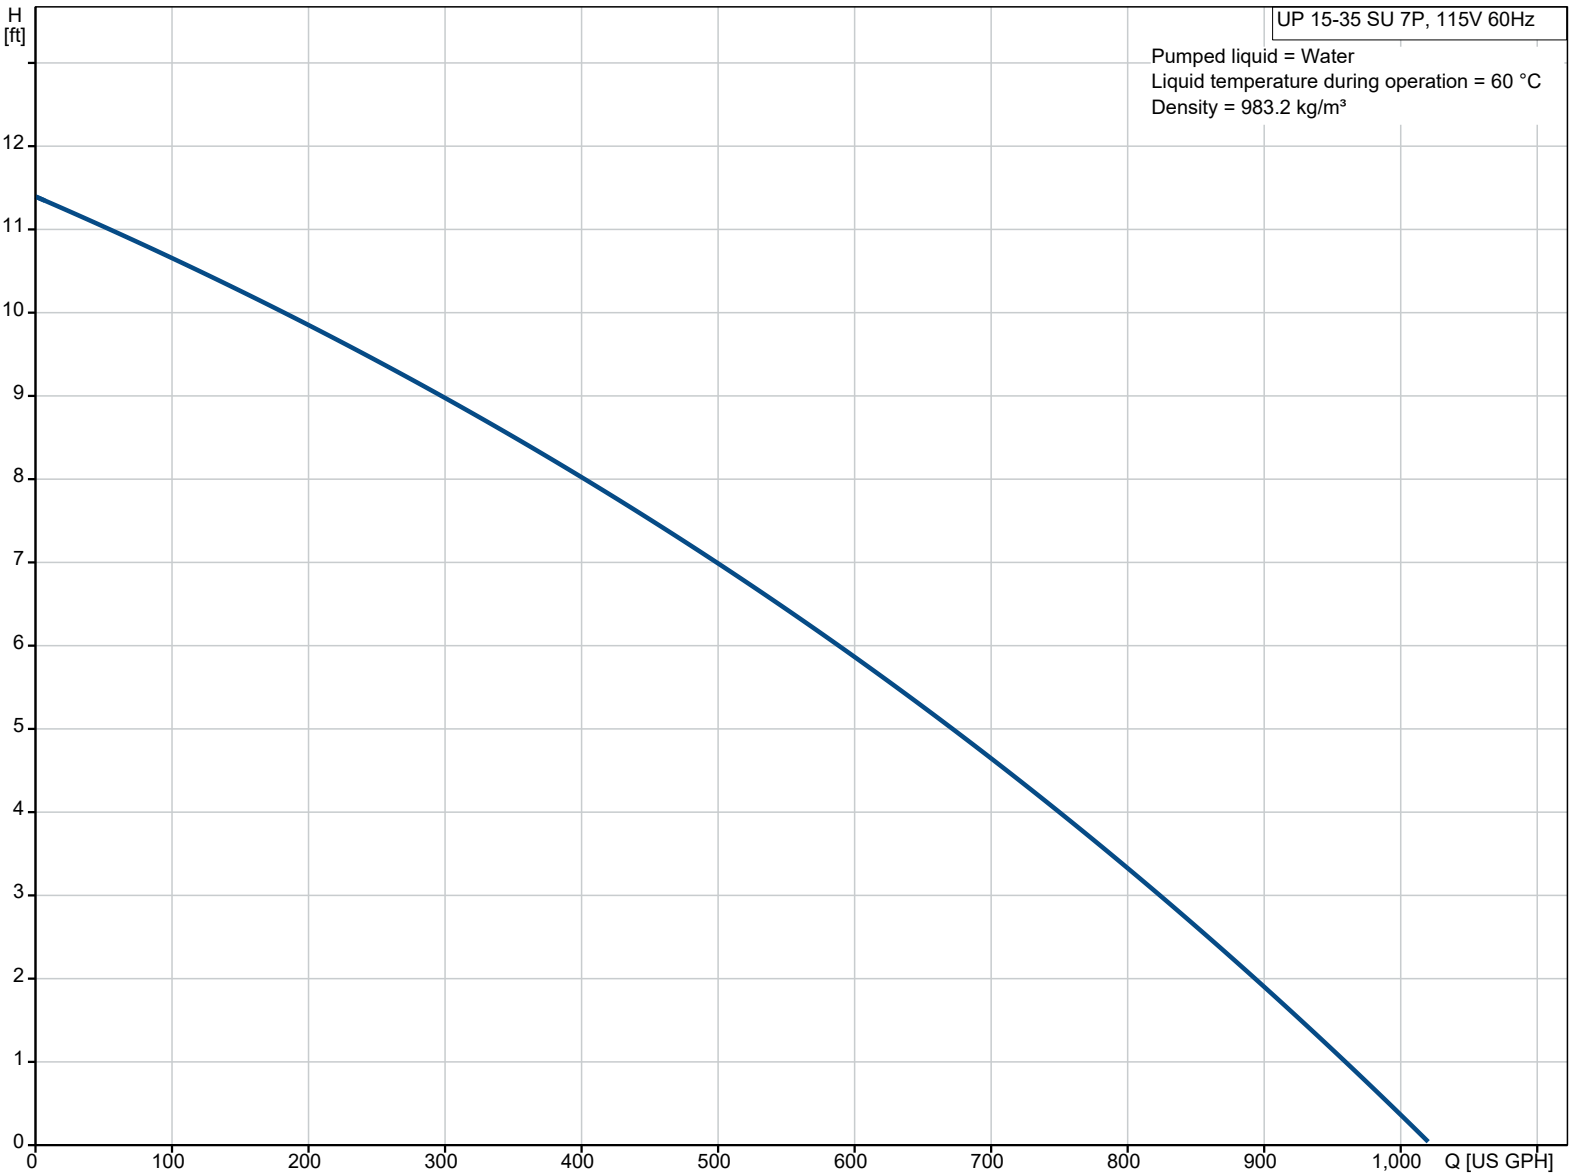

On request UP 15-35 SU 7P 60 Hz

