Davison, MI • PH: 810-653-9626 • FAX: 810-653-8714 • www.Fernco.com

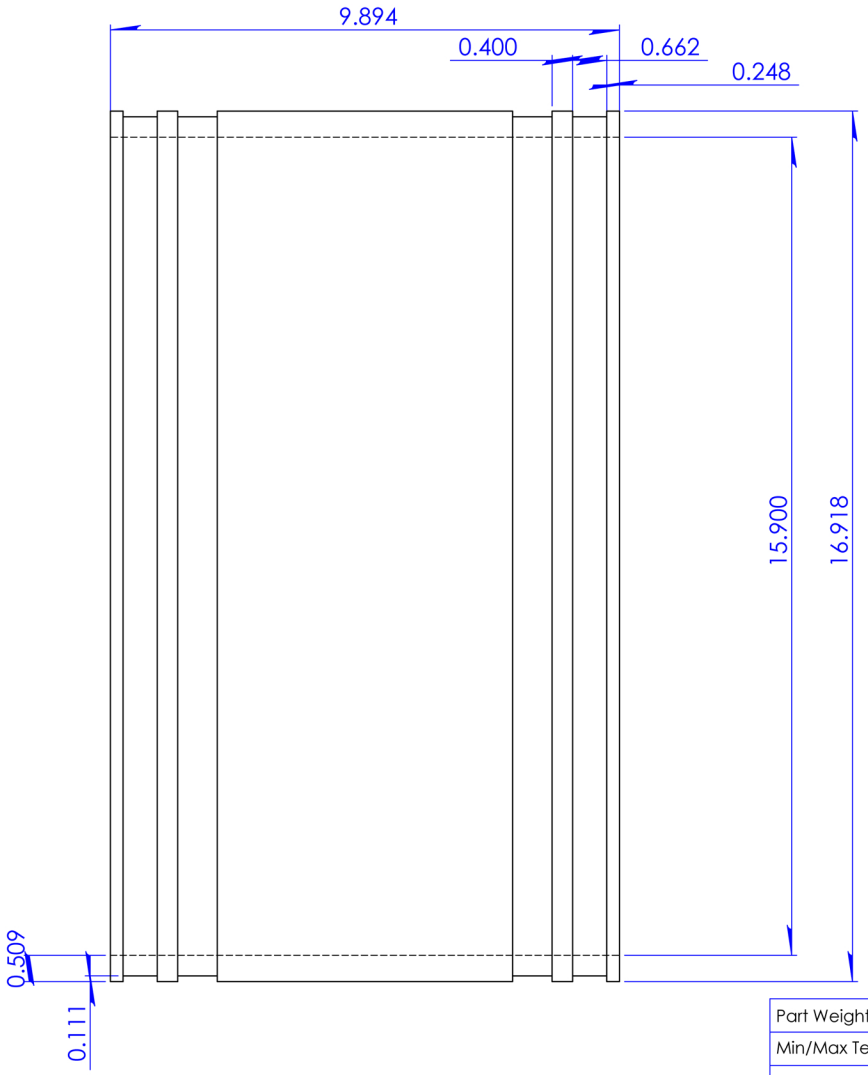

Part Weight	
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC
Installation Torque	60" Lbs.
Conforms to ASTM	D5926
Box Quantity	
Clamps used	300 Series

TOLERANCES:
.X= Fractional ±
.XX= ±.02
.XXX= ±.030
ANG.= ±0.5°
UNLESS OTHERWISE SPECIFIED

DESCRIPTION:
1051-1515

1051-1515

NOTES:
- SOME HIDDEN LINES NOT SHOWN
-BREAK ALL SHARP CORNERS
-REPORT ALL CHANGES TO ENGINEERING

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

UNITS: INCHES	SIZE A	DESIGNER: D. Brady		SCALE not to scale
3RD ANGLE PROJECTION DO NOT SCALE DRAWING		CHECKER:	DATE: 3/4/2008	SHEET 1 OF 1