



| Count | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | <p><b>Injection unit</b><br/>Product No.: <a href="#">95730926</a></p> <p>Injection units connect the dosing line with the process line. They ensure a minimum counterpressure of 0.7 bar, and avoid backflow of the dosing liquid. The spring-loaded non-return valve comes with Tantal spring. The injection pipe of PP, PVC and PVDF versions can be shortened.</p> <p><b>Technical:</b><br/> Pump_connection: G5/8<br/> Version: Standard version</p> <p><b>Materials:</b><br/> Housing: PVDF<br/> Valve ball: Ceramic<br/> Gasket: FKM</p> <p><b>Installation:</b><br/> Maximum operating pressure: 232.06 psi<br/> Pipework connection: 0,17"x1/4", 1/4"x3/8", 3/8"x1/2"<br/> Outlet connect: 1/2"NPT</p> <p><b>Others:</b><br/> Applicat. typ: General use</p> |

| Description                 | Value                            |
|-----------------------------|----------------------------------|
| <b>General information:</b> |                                  |
| Product name:               | Injection unit                   |
| Product No.:                | 95730926                         |
| EAN:                        | 5710626523719                    |
| <b>Technical:</b>           |                                  |
| Max. capacity:              | 15.85 US gal/hour                |
| Pump_connection:            | G5/8                             |
| Version:                    | Standard version                 |
| <b>Materials:</b>           |                                  |
| Housing:                    | PVDF                             |
| Valve ball:                 | Ceramic                          |
| Gasket:                     | FKM                              |
| <b>Installation:</b>        |                                  |
| Maximum operating pressure: | 232.06 psi                       |
| Opening pressure:           | 11.6 psi                         |
| Pipework connection:        | 0,17"x1/4", 1/4"x3/8", 3/8"x1/2" |
| Outlet connect:             | 1/2"NPT                          |
| <b>Others:</b>              |                                  |
| Applicat. typ:              | General use                      |

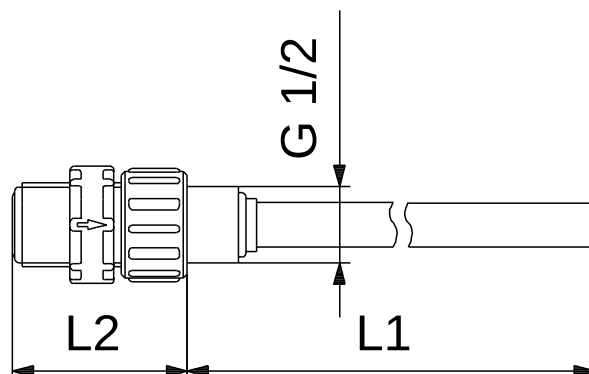

**95730926 Injection unit 60 Hz**

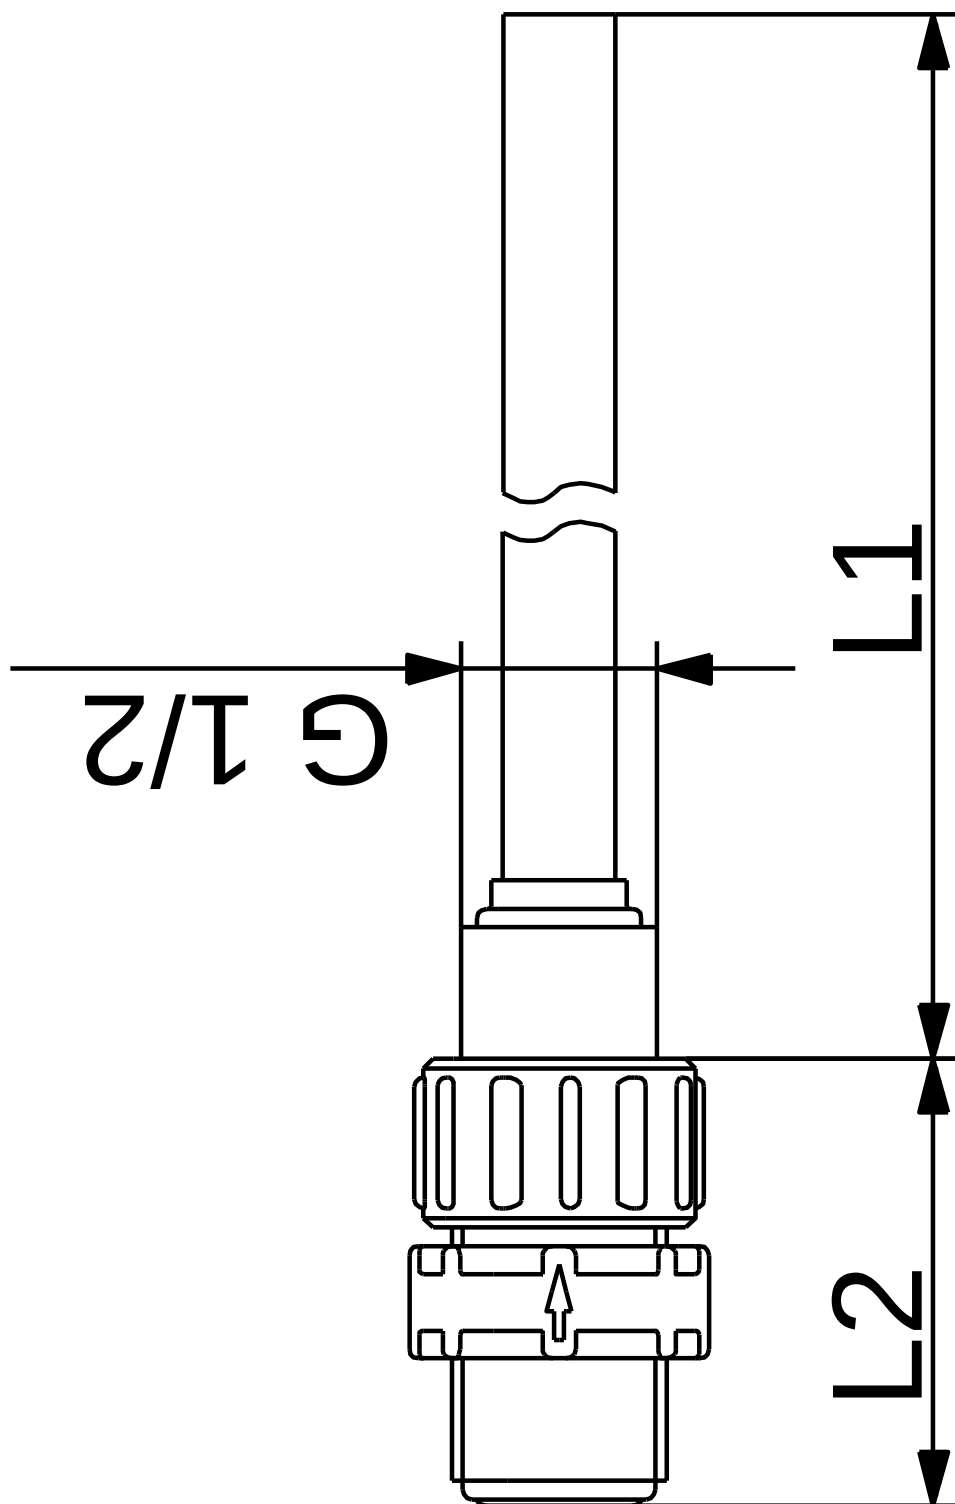

Note! All units are in [in] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



Company name:

Created by:

Phone:

Date:

4/11/2019

---

**Order Data:**

Product name: Injection unit

Amount: 1

Product No.: 95730926

Total: Price on request

---